

# Play Tower with Double Floor

PCM101231

**KOMPAN**  
Let's play




The Play Tower with Double Floor is a highly inviting and fun play attraction for developing toddlers. The multiple levels encourage physical activity, and the balcony allows for social interaction between the outside and the inside of the tower. Children crawl, walk and run the stairs. This activity trains cross-coordination, a fundamental skill for e.g. later

reading skills. The play tower slide is a play destination, and sliding stimulates the sense of balance, which is fundamental for mastering any physical activity. On ground level the intriguing sand tube panel attracts toddlers to pass sand and other items through the funnel, again and again. This stimulates the understanding of object permanence: that

items may still exist when they are out of sight. The tactile abacus invites counting games, building an understanding of space, shapes and measures. All in all, lots of social interaction and physical play in a small footprint.

|                                    |                |
|------------------------------------|----------------|
| Item no. PCM101231-0603            |                |
| <b>General Product Information</b> |                |
| Dimensions LxWxH                   | 258x292x211 cm |
| Age group                          | 2 - 5          |
| Play capacity (users)              | 13             |
| Colour options                     |                |

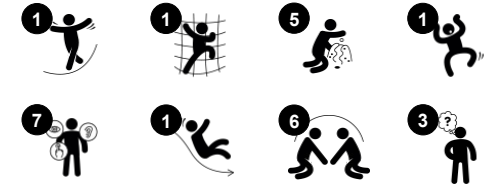

# Play Tower with Double Floor

PCM101231



## Flower panel

**Social-Emotional:** invites cooperation due to the two-sidedness and provides for parallel play. **Cognitive:** suggests a theme and supports dramatic play, which stimulates language and communication skills.




## Funnel

**Social-Emotional:** trains cooperation and turn-taking as children put materials into the funnel. **Cognitive:** the passing of materials through funnels supports the children's logical thinking and for younger children the understanding of object permanence: that materials don't vanish but run through at the other end.



## Slide

**Physical:** sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. **Social-Emotional:** empathy stimulated by turn-taking. **Cognitive:** young children develop their understanding of space, speed and distances when sliding down quickly.



## Abacus

**Cognitive:** supports understanding of measures.

# Play Tower with Double Floor

PCM101231



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but is also produced from +95% recycled post consumer material from food packing waste. Wooden panels of impregnated and brown painted pine wood with vertical steel profiles.




Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.

| Item no. PCM101231-0603  |  |
|--------------------------|--|
| Installation Information |  |
| Max. fall height         | 133 cm   |
| Safety surfacing area    | 30.9 m <sup>2</sup>  |
| Total installation time  | 13.7   |
| Excavation volume        | 0.32 m <sup>3</sup>  |
| Concrete volume          | 0.00 m <sup>3</sup>  |
| Footing depth (standard) | 60 cm  |
| Shipment weight          | 415 kg   |
| Anchoring options        | In-ground <input checked="" type="checkbox"/><br>Surface <input checked="" type="checkbox"/> |
| Warranty Information     |  |
| EcoCore HDPE             | Lifetime   |
| Post                     | 10 years   |
| PP Decks                 | 10 years   |
| Spare parts guaranteed   | 10 years   |

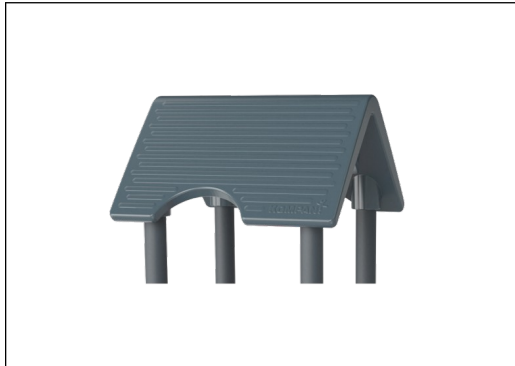

Roof is made from rotomoulded PE with 33% Post-consumer materials. PE has high impact resistance across a wide temperature span which ensures durability.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCore™ panels of 95% post-consumer recycled waste and molded PP decks.

| Elevated activities 4 | Accessible elevated activities | Accessible ground level activities | Accessible ground level play types |
|-----------------------|--------------------------------|------------------------------------|------------------------------------|
| Present               | 4                              | 1                                  | 1                                  |
| Required              | 2                              | 1                                  | 1                                  |

**CSA  
Z614**  
compliant

# Sustainability Data

PCM101231



| Cradle to Gate A1-A3  | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|-----------------------|--------------------------------|-------------------------|--------------------|
|                       | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| <b>PCM101231-0651</b> | 441.37                         | 1.54                    | 67.88              |
| <b>PCM101231-0603</b> | 470.90                         | 1.62                    | 25.51              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Play systems



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000





# Play Tower with Double Floor

PCM101231

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

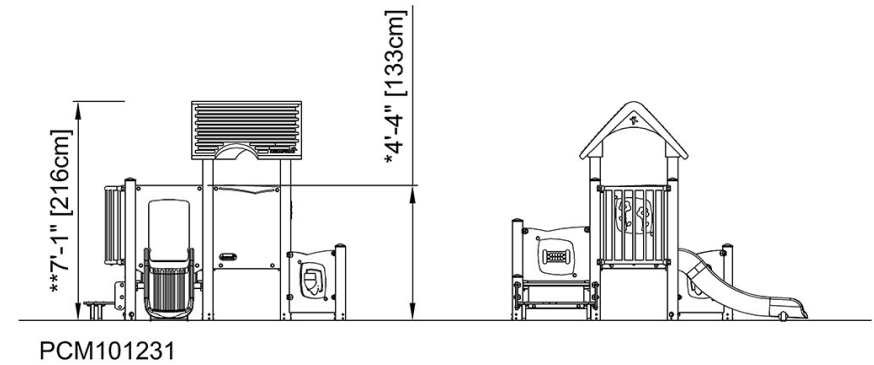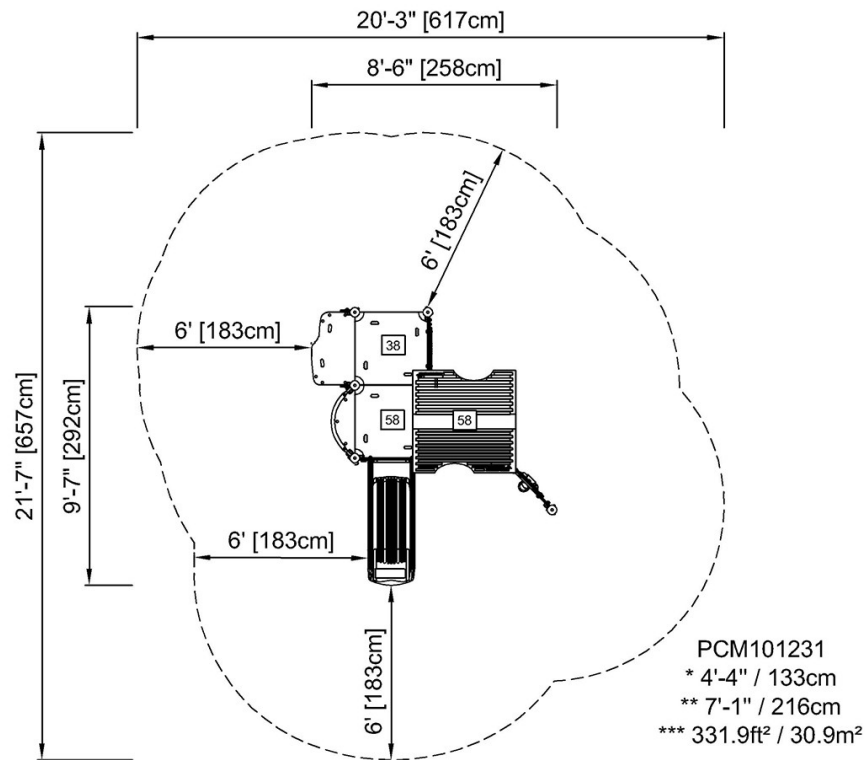

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)