
KPL2013





A variety of climbing and crawling activities are combined in this double play structure: an inclined climbing wall, sturdy steel rung ladder and a big meshed net that can be climbed through, which also allows room for a seated break. The two towers of the play structure are connected by an open, wobbly net bridge, which can be balanced over. Once on the two

platforms a fun exit is provided by the using the fireman's pole or the slide.







KPL2013





Somersault bar

Physical: develop balance and core when hanging from knees. Arm, leg and core muscles are developed when climbing up, somersaulting around. Balance and spatial awareness are strengthened. Social-Emotional: meeting, socializing and turntaking when climbing up and down via bar.





Slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.



Climbing net

Physical: children develop cross-body coordination and muscle strength when climbing. The big meshes allow for climbing and crawling through, supporting proprioception and spatial awareness. Social-Emotional: the big meshes allow for more children to sit together and talk.



Pipe ladde

Physical: cross coordination and eye-hand coordination are supported when children climb the ladder. The climbing also supports leg and arm muscles. **Social-Emotional**: learning about turn taking and cooperation.



Fireman's pole

Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in early childhood. Social-Emotional: turn-taking and risk-taking. Cognitive: young children develop their understanding of space, speed and distances when gliding down fast.



Net bridge

Physical: children develop their balance, cross coordination and spatial awareness in the open net. Social-Emotional: interaction with children outside, socializing. Cooperation and consideration, e.g. when passing others.



Rock climber

Physical: supports cross coordination and leg, arm and hand strength. Social-Emotional: the inclination makes climbing feel secure, especially for younger children.

KPL2013



118 cm

32.7 m²

1.54 m³

0.00 m³


90 cm

394 kg

14.7




Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.




The main tower posts are available in two types of material: European pine wood posts, pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). Aluminum post t=2mm with anodized surface treatment. Base material EN AW-6060 T66.




Floors and panel activities are available in two types of material: Waterproof plywood decks thickness 21.5mm from pine and alder wood with anti-slip film on both sides. High Pressure Laminate HPL thickness 17.8mm with slip resistant surface texture according to EN 438-6.



	Suriace			
Warranty Information				
Aluminum	15 ye	ars		
EcoCore HDPE	Lifet	ime		
Pinewood	10 ye	ars		
Ropes & nets	10 ye	ars		
Spare parts guaranteed	10 ye	ars		



The large hollow components are made of 100% recyclable PE. The roof displayed is moulded in one piece with minimum 5,5mm wall thickness to ensure high durability in all climates around the world.



Slides are available in three different materials: moulded on piece PE slides made from 33% post-consumer materials, Combined EcoCore™ sides and stainless steel slide bed t=2mm. Full stainless steel AlSI304 t=2mm.



The main posts are equipped with hot dip galvanised steel footings. The steel footings elevates the posts 20mm from ground level to avoid contact with surfacing material.



Sustainability Data

KPL2013





Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg Recycled materials	
	kg CO₂e	kg CO₂e/kg	%
KPL201311-0901	524.35	1.72	26.45

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Play systems



Data version no. 2023-10-05

The $\mathrm{CO_2}$ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





KPL2013



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

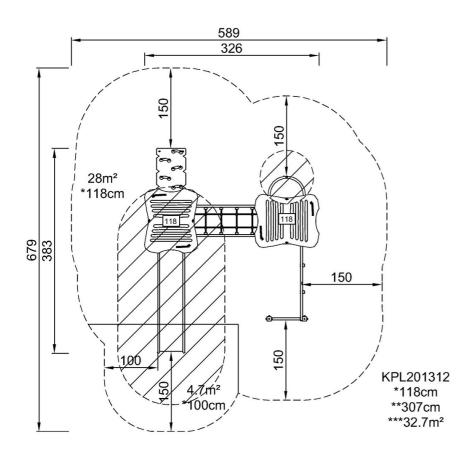

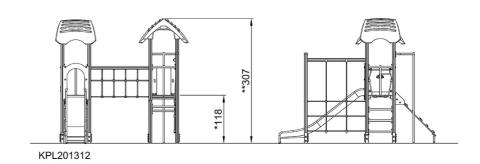

Click to see SIDE VIEW