

PCM201931





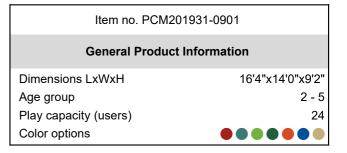

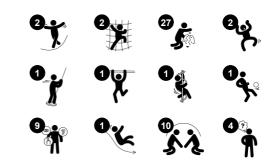

This Angled double tower will attract children to explore, socialize and develop in active outdoor play. The sturdy stairway and the tunnel support climbing, crawling, and cross-coordination. This stimulates cross-modal perception, important for reading. The bubble window in the tunnel bridge distorts voices when spoken into, evoking a sense of wonder

and training logical thinking. On the elevated level, there are three ways to exit the unit; a slide, a curly climber, and a pipe climber, which will support children in thrill-seeking and physical decision making. Sliding and gliding support posture and balance, important skills for navigating the world securely. On ground level, inviting play spaces with rich play panels

stimulate cause-and-effect understanding, both in a tactile and auditive manner. These spaces encourage social and dramatic play, supporting language development.



PCM201931











Curly climber

Physical: coordination and proprioception are supported when placing arms and legs correctly for going down. Sense of balance when rotating. Arm muscles for holding tight. Social-Emotional: empathy stimulated by turn-taking, Cognitive: logical thinking when placing arms and legs right for rotating downward.











Accessible stairway

Physical: climbing the accessible stairway is for all and supports cross coordination as well as arm and leg muscles. For young children, walking stairs and alternating feet is developed. Social-Emotional: room for active breaks and adult helpers. An inclusive space.



























Flap door



Physical: tactile stimulation from leaning the


suggests a theme and supports dramatic play,

body through rubber doors. Cognitive:

which stimulates language and

communication skills.





conversations with its dual-sidedness. Cognitive: logical thinking, understanding numeracy. Creative: creating sounds when the spheres run through grooves.




Social-Emotional: invites social interaction and co-creation for more children, on both sides. Cognitive: understanding of cause and effect when striking tubes and creating sound. Creative: the creation of different intensity and tonality stimulates creative skills.









Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.

PCM201931





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.



Main posts with hot-dip galvanized steel footing are available in different materials: Pressure impregnated pinewood posts. Pre-galvanized inside and outside with powder-coated top finish steel posts. Lead-free aluminum with color anodized top finish. Greenline TexMade posts of 100% post-consumer recycled PE and textile waste.



All decks are supported by uniquely designed low-carbon aluminum profiles with multiple attachment options. The grey-colored molded decks are made of 75% post-consumer ocean waste PP material with a non-skid pattern and texture surface.

Item no. PCM201931-0901					
Installation Information					
Max. fall height		6'8"			
Safety surfacing area	5	77ft²			
Total installation time		26.1			
Excavation volume	0.6	5yd³			
Concrete volume	0.0	1yd³			
Footing depth (standard)		2'9"			
Shipment weight	171	19lbs			
Anchoring options	In-ground	~			
	Surface	~			
Warranty Information					
EcoCore HDPE	Lifetime				
Post	10 Y	10 Years			
PP Decks	10 Y	10 Years			
Spare Parts Availability	10 Y	10 Years			



The slides can be chosen in six different colors and three materials: Straight or curved one-piece molded PE slides. Combined EcoCore™ sides and stainless steel. Full stainless steel in a one-piece design for more vandalism-proof solutions.



The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.



KOMPAN GreenLine versions are constructed with the most environmentally friendly materials with the lowest possible CO2e emission factor. TexMade posts, EcoCoreTM panels of 100% post-consumer recycled ocean waste, and molded PP decks.

Elevated activities 6	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	6	3	2
Required	3	2	2
'			

ASTM F1487 compliant **Sustainability Data**

PCM201931



Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM201931-0951	1,022.36	1.50	69.54
PCM201931-0901	1,391.36	2.27	57.66

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Play systems



Data version no. 2023-10-05

The $\mathrm{CO_2}$ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





PCM201931



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

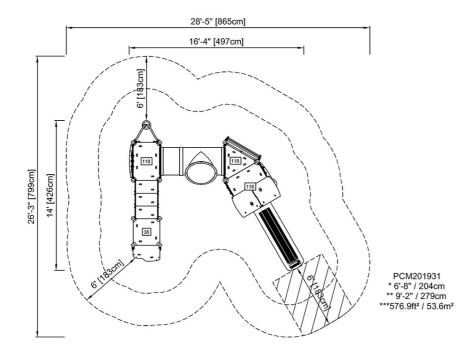

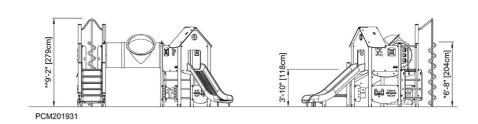

Click to see SIDE VIEW