# **Sport Bike Pro Touchscreen**

FAZ50201



ltem no. FAZ50201-0801			
General Product Information			
Dimensions LxWxH	110x51x118 cm		
Age group	13+		
Play capacity (users)	1		
Color options			

See KOMPAN Fit app for more



The Sport Bike is an adjustable and interactive piece of cardio equipment which is the same quality and as equally effective as what you expect in equipment at an indoor fitness centre. The Sport bike is all about an active riding style, the frame optimized for performance riding in a forward leaning position, the height of the sport bike saddle can be adjusted so that everyone can bike in the right position. The patented, self-powered resistance units create a real road cycle experience. The resistance can adapt automatically depending on the pedalling speed, or the users can choose to manually change the resistance on the 7" touchscreen or in the KOMPAN App.

# **Sport Bike Pro Touchscreen**



FAZ50201





The saddle is made of a Polyurethane Rubber and has a steel insert plate which connects it to the aluminium saddle pin. The saddle can be adjusted to 13 different heights, using a stainless steel pop-pin. The cover is made of one the hardest materials in the market, a Lexan Copolymer EXL9330 and has a thickness of 4mm. This cover can withstand any impact and will protect the electronics in the best possible way.

The Q-factor of the arm bike is 175mm, the crank is made of 18 mm stainless steel and connects the pedal arms which are casted stainless steel (grade 304) parts. The length of the pedal arms is 170mm and the pedals are connected with standard bike fittings.

Item no. FAZ50201-0801		
Installation Information		
Max. fall height		100 cm
Safety surfacing area		11.4 m²
Total installation time		2.3
Excavation volume	(	0.34 m³
Concrete volume	(	0.21 m³
Footing depth (standard)		80 cm
Shipment weight		126 kg
Anchoring options	In-ground	✓ b
	Surface	~



The Innovative self-powered electrical motor and gear providing a virtual flywheel to give real road experience. The resistance works as and automatic drive and adapts automatically to the pedaling speed. The users can overwrite the automatic drive manually by changing the resistance in steps (26 - Watts) through the App.



The handle bars are designed with multiple hand positions to accommodate different postures and riding styles. It is a casted Aluminium part with Polyurea coating for good grip and insulation. The bike has a 7" colour LCD connected console with real-time feedback. The screen has an IK8 and IP65 protection.





You can connect the cardio machine to your phone or tablet via Bluetooth. This will provide instant feedback on speed, distance, cadence, watts, calories burned and time. You can also use your smart devices to manually adjust resistance (10 levels), have access to instructional and motivational videos, store and share activity data online!



# **Sustainability Data**

Cradle to Gate A1-A3


FAZ50201-0801

FAZ50201



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







#### Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

325.80

CO2e/kg

kg CO<sub>2</sub>e/kg

4.39

Recycled

materials

%

35.40





FAZ50201

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area



\* Max fall height | \*\* Total height

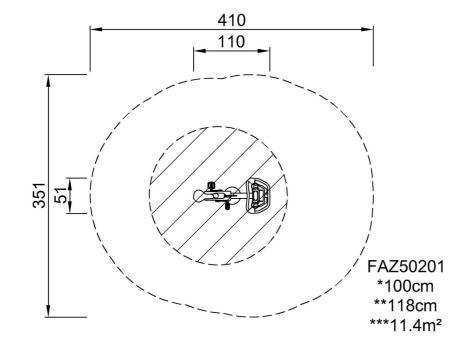

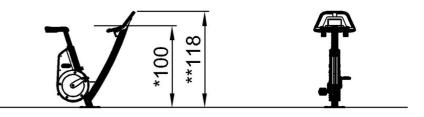

FAZ50201

Click to see TOP VIEW

Click to see SIDE VIEW

4 / 04/22/2024