PCM111531





General Product Information

Dimensions LxWxH 634x283x230 cm
Age group 4 - 12
Play capacity (users) 5
Colour options



The Track Ride Tower is a great play item that responds to the children's movement and urge for a thrill. This is the recipe for play success and will make children return for play again and again. The track ride glides down from the tower. Trained users will be able to flip their legs up to the top beam at the end and pushing themselves all the way back to the platform.

This trains muscles, proprioception and timing, all important abilities in sports and life. To other users, jumping off at the end or half back will train bone density. The handhold allow them to hand over the glider. The children train their arm, leg and core muscles. They greatly train their social-emotional skills, training turn-taking and empathy when helping others to succeed.

Thrilling, fun play that trains the school age child's social and physical life skills.



PCM111531









Track Ride

Physical: train arm and core muscles. Bone density when jumping down from the handholds and motor skills like agility, balance and coordination are supported. Social-Emotional: cooperation, consideration, turntaking, risk-taking, self-confidence.









Physical: cross coordination and eye-hand coordination are supported when children climb the ladder. The climbing also supports leg and arm muscles. Social-Emotional: learning about turn taking and cooperation.



Climbing net

Physical: supports physical strength and cross-body coordination, which impacts coordination of the right and left part of brain, fundamental for other skills such as the ability to read.

PCM111531




2 years

10 years

10 years

10 years

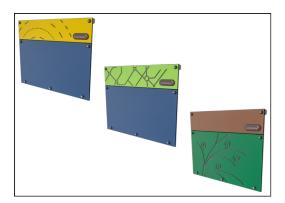

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.




Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.

	item no. PCM111531-0902						
Installation Information							
	Max. fall height		198 с	m			
	Safety surfacing area		47.6 n	n²			
	Total installation time		10	.1			
	Excavation volume		0.27 n	n³			
	Concrete volume		0.05 n	n³			
	Footing depth (standard)		85 c	m			
	Shipment weight		345 k	κg			
	Anchoring options	In-groun	d	•			
		Surface		~			
Warranty Information							
	EcoCore HDPE		Lifetim	ıe			

Item no PCM111531_0002



The hang-on puller is designed with at welded steel core and covered with low-density PE housing. The two hot dip galvanised steel handles are angled to provide best possible ergonomic while gliding. The wheels of the puller are made of low noise TPU and installed with sealed ball bearings.

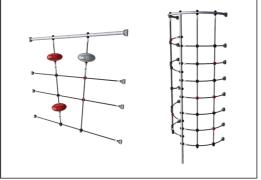

Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.

Elevated activities 4	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	0	0
Required	2	1	1

CSA Z614 compliant

Movable parts

Ropes & nets

Spare parts guaranteed

PP Decks

Sustainability Data

PCM111531





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM111531-0902	708.99	2.80	50.57

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Play systems



Data version no. 2023-10-05

The $\mathrm{CO_2}$ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


PCM111531



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

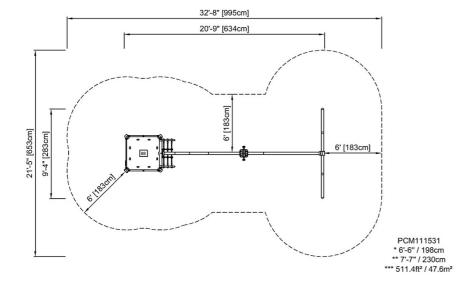

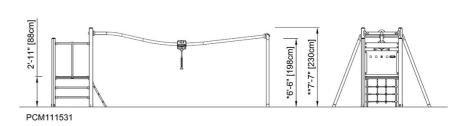

Click to see SIDE VIEW