

Item no. COR103101-1101 **General Product Information** Dimensions LxWxH 1263x1117x385 cm 3+ Age group Play capacity (users) 103 Colour options



The amazing Four Mast Octa Net & Bouncing net has so many play opportunities from the top to the bottom. The structure will provide hours of physical and social activity that all help towards building a healthy lifestyle. The carefully designed features support the development of agility, balance and coordination as well as spatial awareness

when bouncing, climbing and sitting in the nets. These motor skills are fundamental for life skills such as managing traffic securely. The careful design of the nets is scaled to the size of children in this age group, maximizing play value. The integrated jumping membranes offer extra fun variety. In addition to the physical benefits, this is an incredibly enjoyable social

space. It will attract children and their parents, creating a space for healthy family fun and be a point of pride for communities.




COR10310







Highest rungs Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, selfconfidence, consideration and turn-taking, all important life skills.

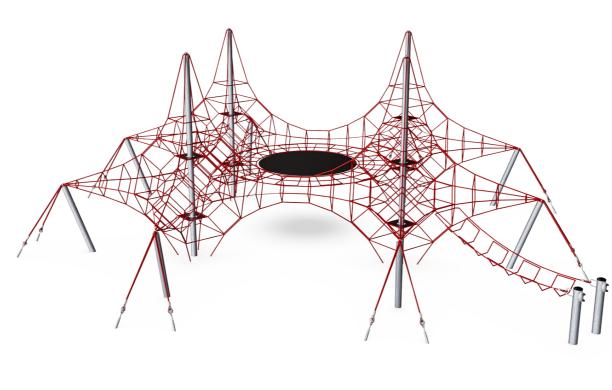



### Waggle bridge

Physical: sense of balance and training of cross coordination. Important for other skills such as being able to sit still. **Social-Emotional:** turn-taking and helping others when climbing up.

### Central circular membrane

Physical: jumping trains balance as well as rhythm and spatial awareness, all important motor skills for stability, strength and confidence in moving. Social-Emotional: the horizontal net and rubber membrane in the middle invite relaxation and social contact. This is a point to retract from the more demanding links to take a break with friends.



self-confidence.

Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. **Social-Emotional:** children develop courage and self-regulation when climbing up high. This positively affects



#### Bouncy net meshes

Physical: agility, balance and coordination as well as spatial awareness are supported when bouncing, climbing and sitting in the net. Children use muscle strength of arms, legs and core, and build bone density when jumping down. Social-Emotional: the bouncing, swaying net appeals to empathy and cooperation. Cognitive: physical memory, logical thinking, concentration.



### Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. **Social-Emotional:** great meeting point allowing socializing.



### **Big meshes**

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. Social-Emotional: allow more children being seated together, sharing.



COR10310



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

	ltem no.	COR103101-1101
--	----------	----------------

## Installation Information

Max. fall height	150 cm
Safety surfacing area	167.9 m²
Total installation time	35.9
Excavation volume	29.02 m³
Concrete volume	18.50 m³
Footing depth (standard)	110 cm
Shipment weight	1,539 kg
Anchoring options	In-ground 🗸

Warranty Information	
Corocord rope	10 years
Membrane	2 years
S-Clamps	10 years
Spare parts guaranteed	10 years
Steel post HDG	Lifetime



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



The steel structure are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.



# **Sustainability Data**

COR10310

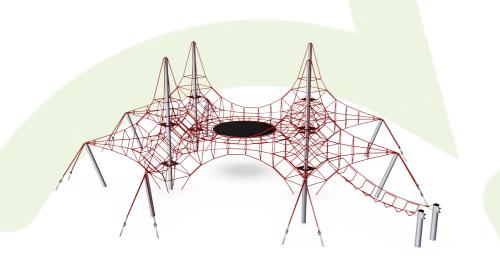

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR103101-1101	4,025.17	3.07	50.93

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



**By Bureau Veritas HSE** 


www.bureauveritas.dk

+45 7731 1000

COR10310

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

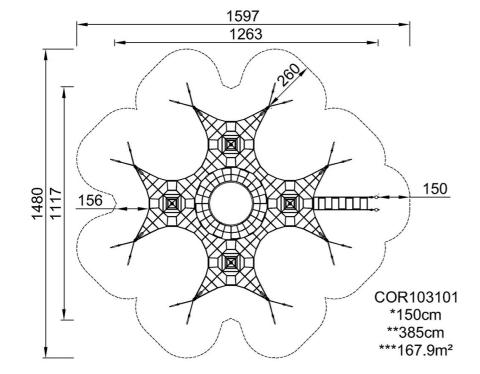

COR103101

Click to see TOP VIEW

Click to see SIDE VIEW

