## **Penta Climber**

PCM81321



Item no. PCM81321-0950			
General Product Information			
Dimensions LxWxH	287x322x253 cm		
Age group	6+		
Play capacity (users)	8		
Color options			



Wow! The Penta Climber attracts children instantly. With its high concentration of challenging activities, the Penta Climber encourages children to play for longer and come back again and again. Its varied climbing features train proprioception and cross-body coordination. These motor skills are fundamental for navigating the world securely and they also affect reading skills. The Climbing Wall, Pipe Climber and Climbing Pole add challenges for moving up as well as across, training muscles. The Horizontal Net offers a great and transparent destination for breaks and talkative play. The Banister Bars and Fireman's Pole are thrilling egresses, and the jumping down builds bone density. Apart from all the climbing and gliding, there are plenty of opportunities for socializing and making friends - which adds to play duration.




# **Penta Climber**

PCM81321





Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.



Panels of 19mm EcoCore<sup>™</sup>. EcoCore<sup>™</sup> is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.




The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

Item no. PCM81321-0950			
Installation Information			
Max. fall height	2	23 cm	
Safety surfacing area	2	7.3 m²	
Total installation time		10.2	
Excavation volume	1	.21 m³	
Concrete volume	0	.59 m³	
Footing depth (standard)		90 cm	
Shipment weight	:	351 kg	
Anchoring options	Surface	~	
	In-ground	~	



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces. KOMPAN GreenLine v ultimate environmenta lowest possible CO2e post, EcoCoreTM pan



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCoreTM panels of 95% post-consumer recycled waste and molded PP decks.



## **Sustainability Data**

PCM81321



Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM81321-0950	512.40	2.11	71.30
PCM81321-0901	632.70	3.06	55.90

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



#### Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

#### Publication date: 30. October 2023



BUREAU


VERITAS




PCM81321



\* Max fall height | \*\* Total height

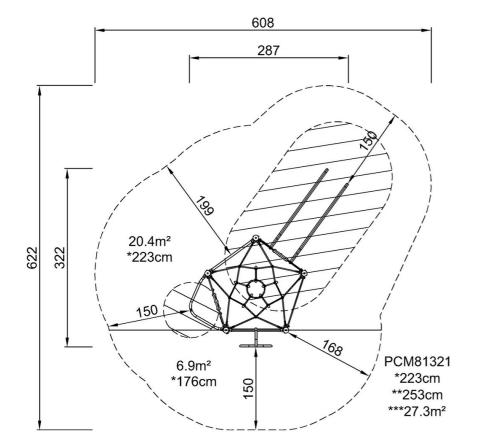

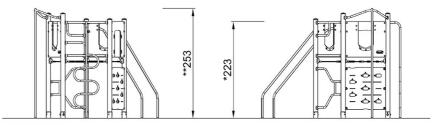

PCM81321

Click to see TOP VIEW

Click to see SIDE VIEW

4 / 04/22/2024