
Midi Spacenet

CRP301501



| Item no. CRP301501-1101 | | |
|-----------------------------|-------------------|--|
| General Product Information | | |
| Dimensions LxWxH | 21'5"x21'5"x15'0" | |
| Age group | 5 - 12 | |
| Play capacity (users) | 22 | |
| Color options | | |





The Midi Spacenet is a bouncy, transparent play structure that encourages children to climb to the top. That feeling of achievement after reaching the summit gives children the ultimate confidence boost and inspires them to try new, challenging routes to the top. The Midi Spacenet trains the "ABC" motor skills: Agility, Balance and Coordination. Major muscle groups are used when children climb. The push and pull with their arms, push with their legs, and core stability needed to navigate the ropes support key physical development.

Midi Spacenet


CRP301501





Mast

Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. **Social-Emotional:** children develop courage and self-regulation when climbing up high. This positively affects self-confidence.

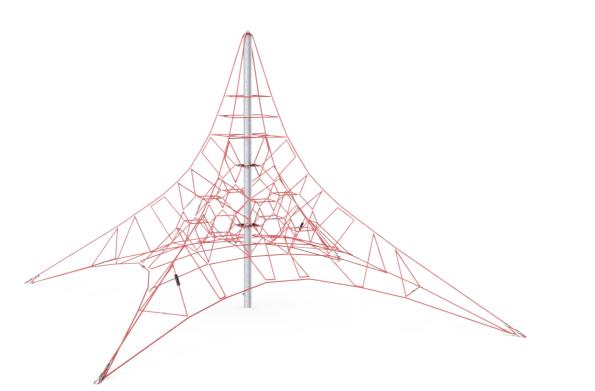



Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. Social-Emotional: allow more children being seated together, sharing.



Highest rungs

Physical: spatial awareness is supported, arm muscles when holding tight. **Social-Emotional:** children develop courage, selfconfidence, consideration and turn-taking, all important life skills.



Bouncy net meshes

Physical: agility, balance and coordination as well as spatial awareness are supported when bouncing, climbing and sitting in the net. Children use muscle strength of arms, legs and core, and build bone density when jumping down. Social-Emotional: the bouncing, swaying net appeals to empathy and cooperation. Cognitive: physical memory, logical thinking, concentration.



Transparency

Social-Emotional: the transparency makes cooperation and communication possible throughout, important life-skills for children to practice.



Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. **Social-Emotional:** great meeting point allowing socializing.

Midi Spacenet




CRP301501



Corocord ropes with 19mm diameter or more are special 'Hercules' - type with galvanized sixstranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.




Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.

| Item no. CRF301301-1101 | | |
|--------------------------|---------------------|--|
| Installation Information | | |
| Max. fall height | 6'0" | |
| Safety surfacing area | 904ft ² | |
| Total installation time | 12.6 | |
| Excavation volume | 6.92yd ³ | |
| Concrete volume | 4.41yd ³ | |
| Footing depth (standard) |) 3'7" | |
| Shipment weight | 1050lbs | |
| Anchoring options | In-ground 🗸 | |
| | | |

Item no. CRP301501-1101

| Warranty Information | | |
|--------------------------|----------|--|
| Corocord Rope | 10 Years | |
| Membrane | 2 Years | |
| S-Clamps | 10 Years | |
| Spare Parts Availability | 10 Years | |
| Steel post HDG | Lifetime | |



With six pre-defined color concepts and numerous add-in and addon options, you can create bespoke Spacenets[™] structures. A new platform enables interlinking with our other popular product categories, such as MOMENTS[™], ELEMENTS[™] and Robinia.



In the center of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favorable and equalizes the oscillations in the net. The masts are hot dip galvanized as standard, with the design option of additional powder coating.



For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

Accessible Accessible Accessible Elevated ground ground elevated level play activities level activities activities types Present Required

ASTM F1487 compliant

Sustainability Data

Cradle to Gate A1-A3

CRP301501-1101

CRP301501



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

1,124.70

CO2e/kg

kg CO₂e/kg

3.07

Recycled

materials


%

53.95





CRP301501





* Max fall height | ** Total height

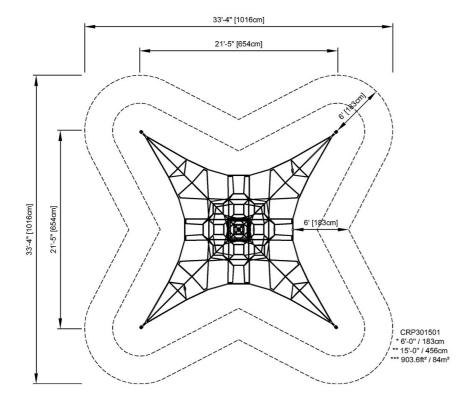

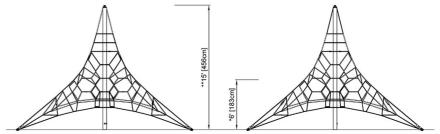

CRP301501

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 03/05/2025