
Square Pull Up Station

FPW218



Item no. FPW21800-0900			
General Product Information			
Dimensions LxWxH	165x164x240 cm		
Age group	8+		
Play capacity (users)	4		
Colour options			

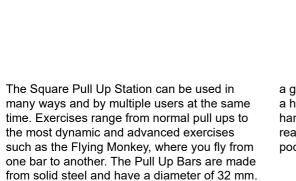

An ideal size for both men and women to have

a good grip. As the highest bar is connected at a height of 233 cm everyone will be able to hang freely, to make sure that everyone can reach the pull up bars there are 2 stepping pods at different heights.



Square Pull Up Station



FPW218



The post is made of Ø101.6 x 2mm, pregalvanised carbon steel and powder coated which is a great protection solution for all climate conditions.




Steps are made of extruded aluminium with a non-skid surface. Aluminium has high corrosion resistance and ensures the durability of the product. Steps have been mounted at heights of 34,7cm and 54,7cm; making it easy to reach the overhead activity



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.

Item no. FPW21800-0900			
Installation Information			
Max. fall height	23	3 cm	
Safety surfacing area	26.9 m²		
Total installation time	3.5		
Excavation volume	0.71 m³		
Concrete volume	0.38 m³		
Footing depth (standard)	90 cm		
Shipment weight	184 kg		
Anchoring options	In-ground 🗸		
	Surface	~	
Warranty Information			
Connectors	10 years		
Galvanised Steel	Lifetime		
Post	10 years		
Spare Parts Guarantee	10 years		

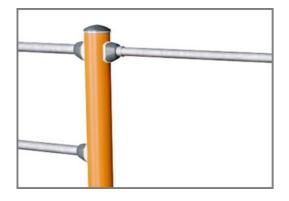

All bars intended for pull ups are made of solid, ø32mm x 138m, hot-dip galvanised, S235JR steel bars. This diameter gives the right grip for all users.



Sustainability Data

Cradle to Gate A1-A3


FPW21800-0900

FPW218



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Somo

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

193.99

CO2e/kg

kg CO₂e/kg

1.88

Recycled

materials

%

67.70





FPW218

* Max fall height | ** Total height | *** Safety surfacing area



* Max fall height | ** Total height

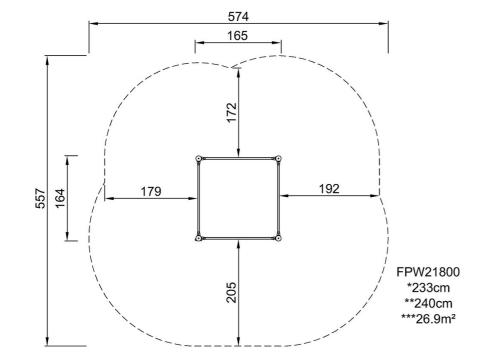

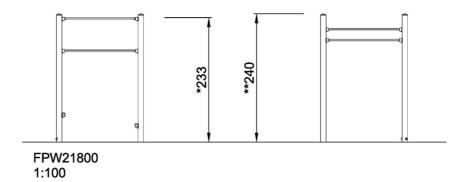

Click to see TOP VIEW

4 / 10/21/2024