
COR20502



Item no. COR205021-1101				
General Product Information				
Dimensions LxWxH	534x100x140 cm			
Age group	3+			
Play capacity (users)	4			
Color options	$\bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet$			




Children can sway mildly or wildly, lie, be seated or even stand in the Rope Hammock. Children of all abilities will take joy in the responsiveness and social interaction in the hammock. Pushing and pulling the friends from side to side is fun and also builds arm strength. The swaying motion supports important motor skills such as the sense of balance and the sense of space. The rhythmic movements support the understanding of rhythm. In combination, these three skills assist the child's ability to navigate space securely, for instance when judging distances and speed in traffic. The sense of balance is fundamental for all other motor skills and helps the child's motor stability: preventing falls and being able to sit still for longer periods of time.

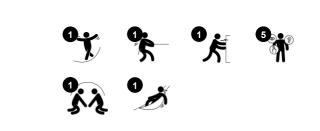

Data is subject to change without prior notice.

COR20502



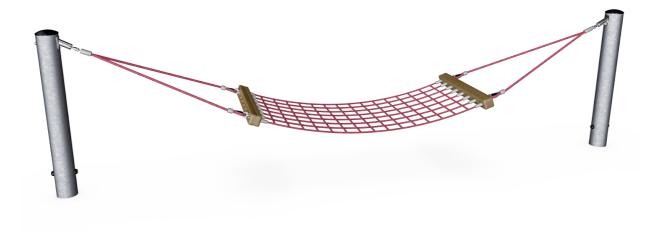



#### Hammock bed

Physical: swaying back and forth trains the sense of balance and spatial awareness, both important for judging distances and navigating space confidently. Social-Emotional: swaying, sharing and meeting with groups of friends. Turm-taking skills, when deciding who is pushing and who is swaying.



Double ropes Physical: pushing and pulling others. Holding the ropes support arm muscles. Can be pushed from a wheelchair position.



COR20502



The nets for the hammocks are produced from 16 mm Corocord ropes. The connection between the ropes are manually spliced to avoid any hard objects in the lying area. The size of the meshsize does not allows to pass through the net.



The aluminium swages of the net are double

safety allows. The overall net design aims at

minimum, both in size and number, in order to

provide the best possible rope climbing

experience.

conical with rounded ends and are as small as

keeping metal parts within the net to an absolute



The steel structure are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.


Item no. COR205021-1101				
Installation Information				
Max. fall height	130	cm		
Safety surfacing area	33.0	m²		
Total installation time		4.4		
Excavation volume	2.20	m³		
Concrete volume	1.40	m³		
Footing depth (standard)	110	cm		
Shipment weight	164	l kg		
Anchoring options	In-ground	~		

Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eyecatching signal colours.



# **Sustainability Data**

COR20502

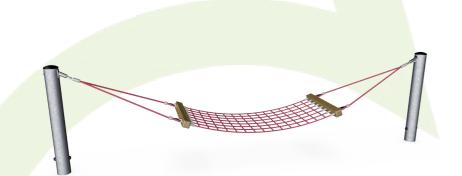

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR205021-1101	367.70	2.29	35.09

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

maiz

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



Data is subject to change without prior notice.

+45 7731 1000


**By Bureau Veritas HSE** 

www.bureauveritas.dk

COR20502

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

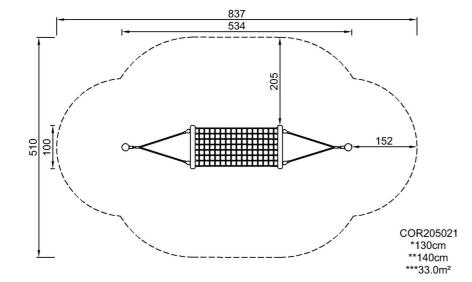



COR205021

Click to see TOP VIEW



