# **Five-Way Swing**

NRO903



Item no. NRO903-1001		
General Product Information		
Dimensions LxWxH	533x509x260 cm	
Age group	2+	
Play capacity (users)	5	
Colour options		







The Five-Way swing is a modern playground favourite! Five children or adults can swing together, trying almost to touch their feet in the middle. It is sociable and fun, and the seat heights vary to cater for different age groups. Combine that with the natural look and feel of Robinia, which provides an organic structure that can either blend into or stand out from your surrounds. Children can touch and feel the timber while playing, observing how nature inspiration interacts with the built environment

## **Five-Way Swing**

NRO903







#### Five-way swing

Physical: balance, coordination and spatial awareness are trained when swinging. All necessary when judging distances and managing traffic safely. Social-Emotional: parallel play invites cooperation and consideration. Cognitive: 'Cause and effect' understanding, managing rhythm and thinking skills for younger children when swinging. Rules games for bigger children.



#### Swing seat with safety chain

Physical: the curved swing seat supports a safely seated position that encourages solid swinging. Social-Emotional: the chain minimizes the risk of children jumping off toward the middle, hitting each other.

# **Five-Way Swing**



NRO903



All organic Robinia products by KOMPAN are made of Robinia wood which is sourced from sustainable plantation farms. On request it can be supplied as FSC® Certified (FSC® C004450).



The standard seats of KOMPAN swings are engineered for maximum safety and durability. The seat two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot-dip galvanised steel or stainless steel for all swings heights.



The swing hangers are made of high-quality UV-stabilised nylon (PA6) housing with integrated lifetime sealed ball bearings. The adjustable height chains are fixed by a stainless steel hook with theft-proof snake-eye bolt in a turnable anti-twist housing.

Item	no	NRO903-1001
nom	no.	11100000-1001

#### Installation Information

Max. fall height	138 cm
Safety surfacing area	44.5 m²
Total installation time	12.1
Excavation volume	0.35 m³
Concrete volume	0.19 m³
Footing depth (standard)	100 cm
Shipment weight	808 kg
Anchoring options	In-ground 🗸

Warranty Information			
Chains	10 years		
Robinia Wood	15 years		
Spare Parts Guarantee	10 years		
Stainless Steel Components	Lifetime		



The Robinia wood can be supplied as untreated raw wood, painted with a brown coloured transparent pigment that maintains the golden wood colour or in a coloured version where selected components are painted in different colours.



### **Sustainability Data**

Cradle to Gate A1-A3

NRO903-1001

NRO903



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO, calculation of: Nature play



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NR0409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

184.66

CO2e/kg

kg CO<sub>2</sub>e/kg

0.31

Recycled

materials

%


2.58




NRO903



\* Max fall height | \*\* Total height

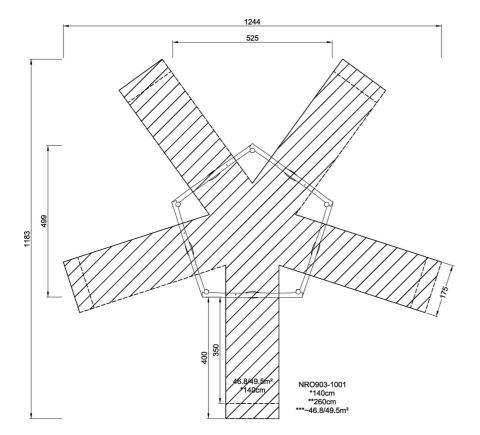



NRO903

Click to see TOP VIEW

5 / 11/20/2024