CRP251401





Item no. CRP251401-0903

General Product Information

Dimensions LxWxH 21'3"x33'7"x11'5"

Age group


0.4

Color options

Play capacity (users)



5 - 12

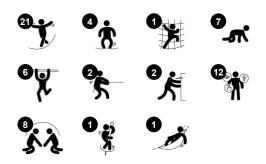

The Saimiri Trail's WOW factor is its transparent, hugely varied range of difficulty levels in climb, crawl, spin, rotate, sway and balance activities. These activities help develop children's agility, balance and coordination, motor skills that are fundamental for a range of important life skills. Eventually, this supports a secure and confident navigation of the body.

The fun loop of varied activities supports classic games, e.g. "the ground is made of lava", which pump up the heartrate and encourage cooperation. The possibility to communicate across the play unit and take breaks at several destinations supports turntaking and communication, important social-emotional skills that are supported in play. The

Musca Spinner offers a solitary spinning point at hilarious speed, where children use all body muscles to push and pull themselves into fast rotation. This supports empathy and cooperation, and not least an incorporated understanding of gravity.



CRP251401









Musca spinner

Physical: balance when standing, sitting and rotating, muscles develop when holding tight. Social-Emotional: cooperation in getting the spinner to turn.







Physical: muscle strength, balance and coordination when climbing up and down, holding tight.







Vertical climbing net

Physical: children develop cross-body coordination when climbing. Arm, leg and core muscles are strengthened. These are important for posture control and also sitting still. Social-Emotional: the meshes allow for more children to sit together and talk.



Shaky pods rope

Physical: sense of balance and space, and training of posture. Important for being able to sit still. Social-Emotional: cooperation, turntaking and friendly competition on the plates.







Coconut rope

Physical: balance and coordination is supported when walking the swaying rope. A good sense of balance transfers to other skills such as sitting still on a chair. Bone density is developed when jumping off. Social-Emotional: children swaying together on the rope experience their own and others' movements. This spurs cooperation and consideration, e.g. when passing others on the rope.



Propeller climber

Physical: support agility, balance and coordination when climbing through. These are important motor skills for moving your body confidently. Arm, leg and core muscles are trained when climbing through the propellers. Social-Emotional: children cooperate, turn-take and consider each other when they climb through the frames. The frames support playful socializing and meetings for groups of children.



Orbital hangout steps

Physical: the spheres invite seated and standing swaying, balancing and bouncing. This supports children's proprioception, which helps them navigate surroundings confidently. Core and arm muscles are strengthened when holding tight and moving between spheres. Social-Emotional: children cooperate, turntake and consider each other when balancing between spheres. This supports playful socializing.

CRP251401






Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to ensure excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

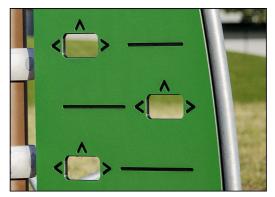

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.

Item no. CRP251401-0903					
Installation Information					
Max. fall height		7'10"			
Safety surfacing area	10)33ft²			
Total installation time		29.6			
Excavation volume	19.	17yd³			
Concrete volume	11.	18yd³			
Footing depth (standard)		2'11"			
Shipment weight	23	15lbs			
Anchoring options	Surface	~			
	In-ground	~			

	In-ground	\		
Warranty Information				
Aluminum clamps	10 Yea	ars		
Hot dip galvanized steel	Lifetir	пe		
Painted toplayer	10 Yea	ars		
Ropes & nets	10 Yea	ars		
Spare Parts Availability	10 Yea	ars		



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



The Corocord Smart Clamps are carefully designed to ensure superior flexibility in highquality aluminum material. The smart clamps are attached around the post with four steel bolts. Unused attachment points are closed with PA caps.



Rocking tube is made of medium density PE with excellent impact strength and usable within a large temperature span. Hollow plastic components are made of 100% recyclable PE made from 33% post-consumer materials. Molded in one piece with minimum 5mm wall thickness. The longitudinal grooves provides a slip resistant surface for safe play.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1

ASTM F1487 compliant

Sustainability Data

CRP251401



Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg Recycled materials	
	kg CO₂e	kg CO₂e/kg	%
CRP251401-0903	2,845.86	3.27	47.58

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000


CRP251401



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

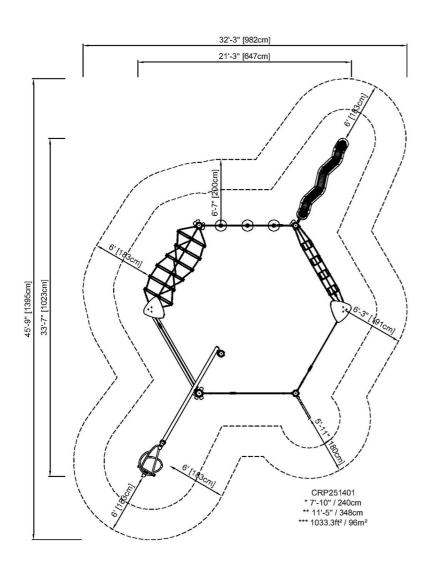

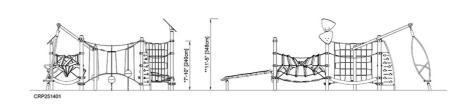

Click to see TOP VIEW

Click to see SIDE VIEW