COR71003





Item no. COR710031-0400

General Product Information

Dimensions LxWxH 12'0"x2'9"x2'7"

Age group 2 - 12

Play capacity (users) 2

Color options







The Embankment Tunnel Slide is extremely attractive. It makes children loop uphill and slide down again and again. The Embankment Tunnel Slide could be the main attraction in a playground. Apart from the immense thrill of sliding, the Embankment Tunnel Slide also gives children support in developing important motor skills. Children train the sense of space

and balance. These are important when managing the world securely to avoid falls and accidents. Collecting the courage to go down into the tunnel adds a sweet sensation of achievement when sliding the Embankment Tunnel Slide. This is a social-emotional benefit, which is further enhanced by the cooperation and turn-taking skills that children develop

when entering. The width of the slide invites rides with friends. The slide mouth is extra long to add a feeling of security.










Tube slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: thrill when going down fast. Empathy stimulated by turn-taking. Cognitive: young children train their understanding of space, speed and distances when sliding down quickly.



COR71003







Catering to different terrains, the embankment slides are available in 9 lengths from 1 - 3m.



Installation Informa	tion				
	llion				
Max. fall height	3'4"				
Safety surfacing area	138ft²				
Total installation time	5.8				
Excavation volume	0.92yd ³				
Concrete volume	0.47yd³				
Footing depth (standard)	3'3"				
Shipment weight	655lbs				
Anchoring options	ln-ground ✓				
Warranty Information					
Spare Parts Availability	10 Years				
Stainless steel slide	10 Years				

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



Sustainability Data

COR71003





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR710031-0400	1,343.40	4.20	49.98

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Some

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


COR71003



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

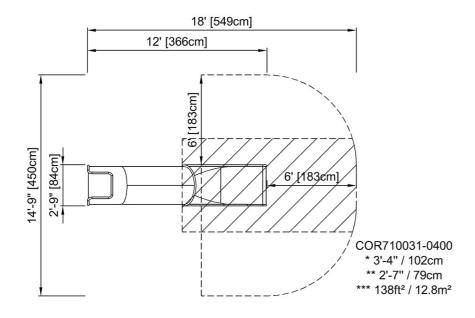

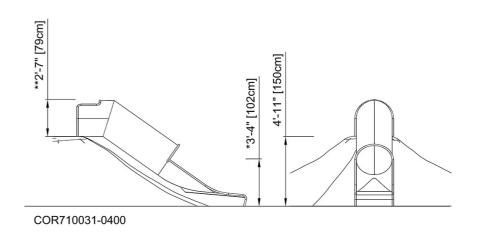

Click to see SIDE VIEW