
COR35441



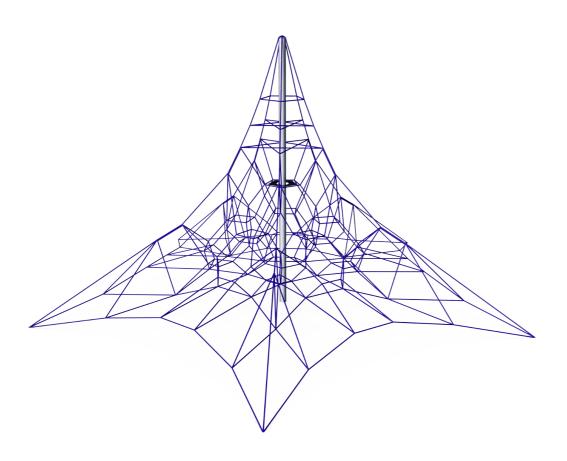

Item no. COR354411-1102

General Product Information


Dimensions LxWxH 937x891x544 cm
Age group 5+
Play capacity (users) 45
Colour options



The adventure of The Pentagonal Spacenet never ends for children especially with the 5m climb to the top. The ropes sway gently, adding to the development of important motor skills such as cross-coordination and sense of space. These are important for example in judging distances when navigating traffic. The muscles are put to work; their legs, arms and

core are trained when climbing and mastering one level after the next. The challenge of climbing this high trains children's risk-taking skills as well as their social skills such as for instance empathy: with many children climbing the swaying rungs, consideration of others is needed. The Pentagonal Spacenet is a great meeting point. Thanks to the wide layout at the

lower level, loads of children can meet and communicate.



COR35441










#### Highest rungs

Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, selfconfidence, consideration and turn-taking, all important life skills.


Physical: the slightly swaying mast stimulates

children's muscles and motor skills when they hold tight climbing the net. Social-Emotional:

children develop courage and self-regulation

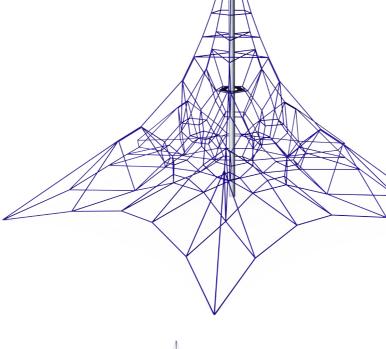







### Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Social-Emotional: allow more children being seated together, sharing.












Physical: agility, balance and coordination as well as spatial awareness are supported when bouncing, climbing and sitting in the net. Social-Emotional: the bouncing, swaying net appeals to empathy and cooperation. Cognitive: physical memory, logical thinking, concentration.



COR35441



180 cm

17.1

101.4 m<sup>2</sup>

9.58 m<sup>3</sup>

6.10 m<sup>3</sup>

110 cm

613 kg

In-ground



Corocord ropes with 19mm+ diameter are known as a 'Hercules' rope type which is formed from galvanised six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. Ropes are highly wear-and vandalism-resistant and can be easily replaced on-site if needed.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.



Safety is at the forefront of our designer's minds. That's why our spacenets' main bearing ropes are equipped with an additional safety feature. Should the main connections point fail, we have included an additional safety rope which prevents the structure from collapsing.



Warranty Information			
Corocord (Hercules) Rope	10 years		
Membrane	2 years		
S-Clamps	10 years		
Spare Parts Guarantee	10 years		
Steel post HDG	Lifetime		

Item no. COR354411-1102 Installation Information

Max. fall height

Safety surfacing area

Total installation time

Footing depth (standard)

Excavation volume

Concrete volume

Shipment weight

Anchoring options



Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast which is made of high-quality seamless steel and creates an oscillating support structure which is statically favourable and equalises the oscillations in the net. The masts are hot-dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

# **Sustainability Data**

COR35441



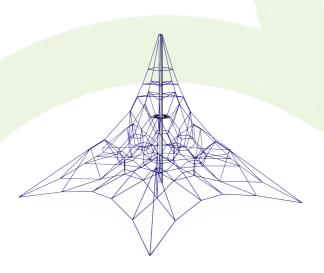

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR354411-1102	1,542.53	3.09	54.98


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mode

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


COR35441



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

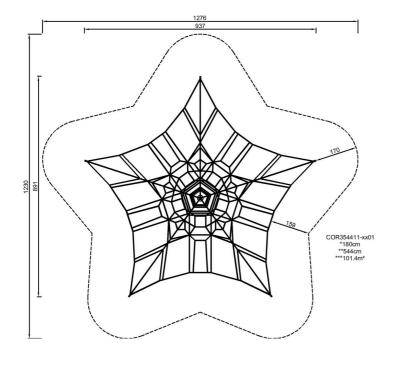

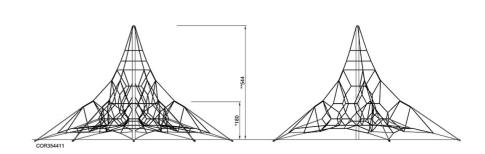

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

Click to see TOP VIEW

Click to see SIDE VIEW