



# Carousel with Bench



KPL114

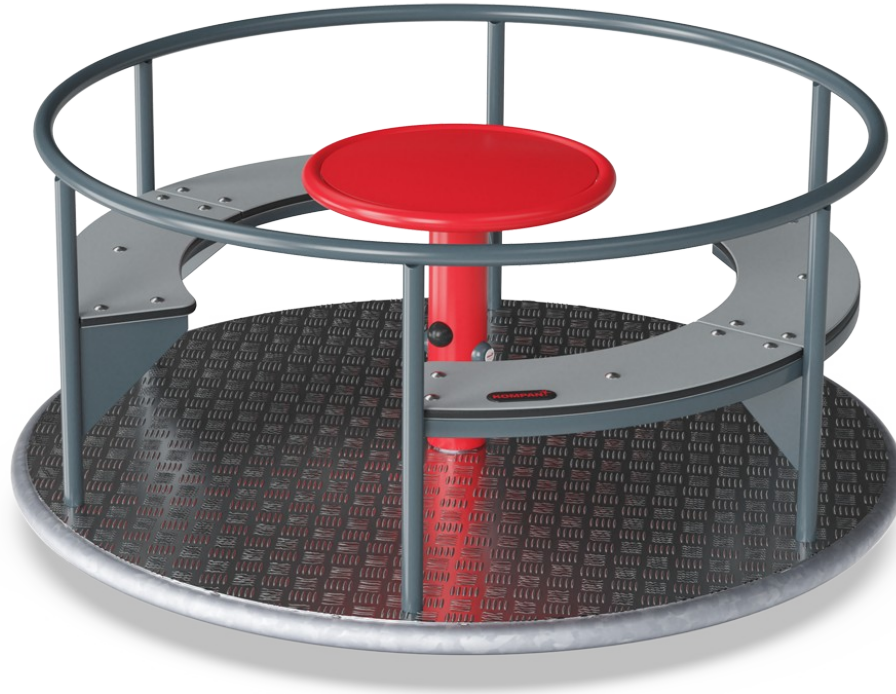

Item no. KPL114-0902

## General Product Information

|                       |   |
|-----------------------|---|
| Dimensions LxWxH      | 155x155x71 cm   |
| Age group             | 2+  |
| Play capacity (users) | 8   |
| Colour options        |    |

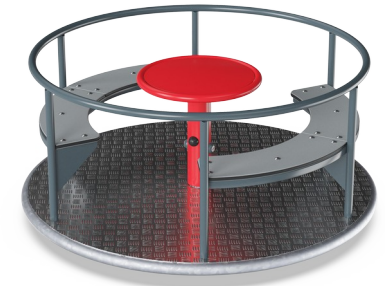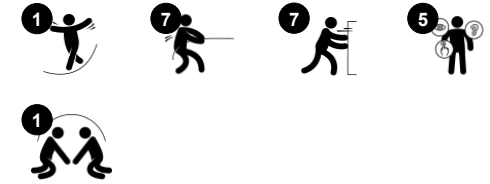

Children can't get enough of the sensation of speed and spinning. Our range contains both traditional carousels and innovative spinning products.


# Carousel with Bench

KPL114



## Center table

**Physical:** training of hand, arm and core muscles when turning the carousel. **Social-Emotional:** cooperation when spinning. Consideration of others when deciding speed of spin. **Cognitive:** understanding of cause and effect and logical thinking for younger children.

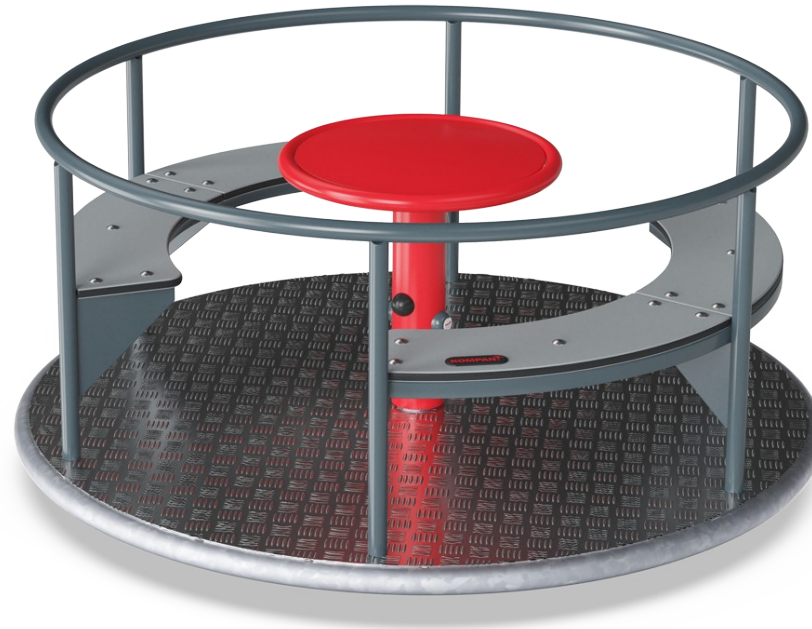

## Carousel bench

**Social-Emotional:** great gathering points placed oppositely to make eye contact possible. This facilitates the cooperation in spinning the carousel.



## Handrails and side poles

**Physical:** pushing or pulling the carousel strengthens arm and leg muscles. **Social-Emotional:** pushing and pulling others facilitates cooperation and empathy: when to stop, how to take turns etc.



## Rotation


**Physical:** pushing or pulling it into motion, children use their muscle strength and strengthen their cardio. The rotation develops the sense of balance and space when enjoying the ride. **Social-Emotional:** listening and negotiating how slow or fast to go, children develop their empathy and cooperation skills.

# Carousel with Bench


KPL114




The steel surfaces are hot dip galvanised inside and outside with lead free zinc and with powder coated top-finish. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

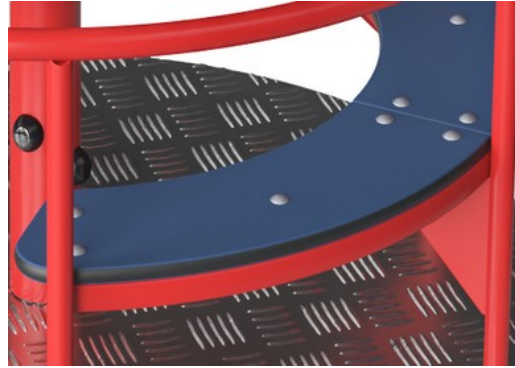

Seats are made of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use, but it is also Made of +95% recycled post-consumer material from e.g., food packing waste in both core and colorful outer layer.

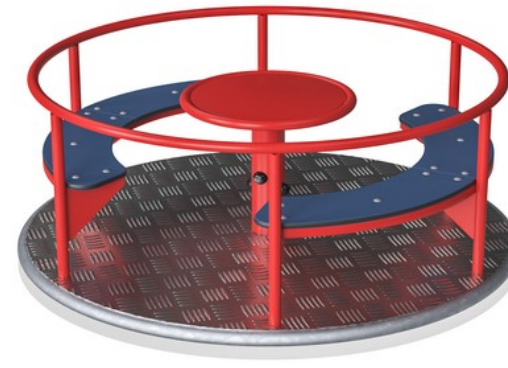

Heavy duty engineered bearing system with two single row deep groove high quality ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and located above ground.

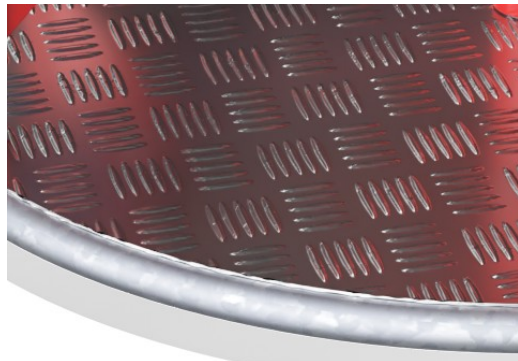


Deck plate of 3mm thick high-quality aluminium with 2mm texture pattern. This aluminium plate ensures safe play for all users and requires low maintenance.

| Item no. KPL114-0902     |                     |
|--------------------------|---------------------|
| Installation Information |                     |
| Max. fall height         | 100 cm              |
| Safety surfacing area    | 24.2 m <sup>2</sup> |
| Total installation time  | 4.1                 |
| Excavation volume        | 0.56 m <sup>3</sup> |
| Concrete volume          | 0.50 m <sup>3</sup> |
| Footing depth (standard) | 100 cm              |
| Shipment weight          | 193 kg              |
| Anchoring options        | In-ground ✓         |
| Warranty Information     |                     |
| Aluminium deck           | 15 years            |
| Bearing construction     | 5 years             |
| Hot dip galvanised steel | Lifetime            |
| HPL decks                | 15 years            |
| Spare parts guaranteed   | 10 years            |



# Sustainability Data

KPL114

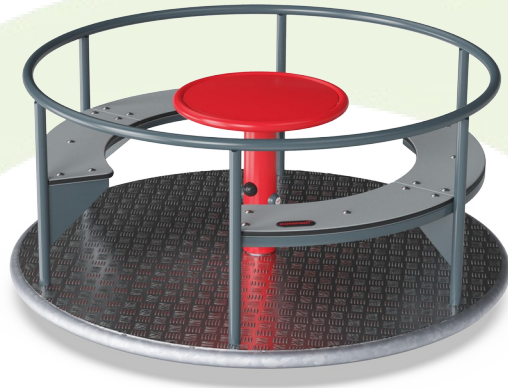

| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
|                      | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| <b>KPL114-0902</b>   | 527.35                         | 3.20                    | 48.01              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

**By Bureau Veritas HSE**  
 www.bureauveritas.dk  
 +45 7731 1000







# Carousel with Bench

KPL114

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

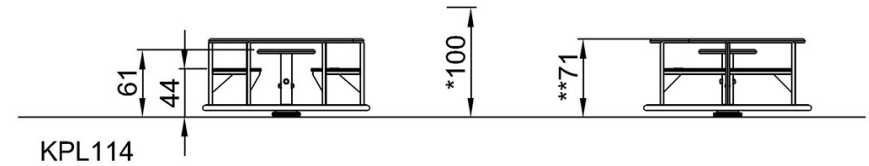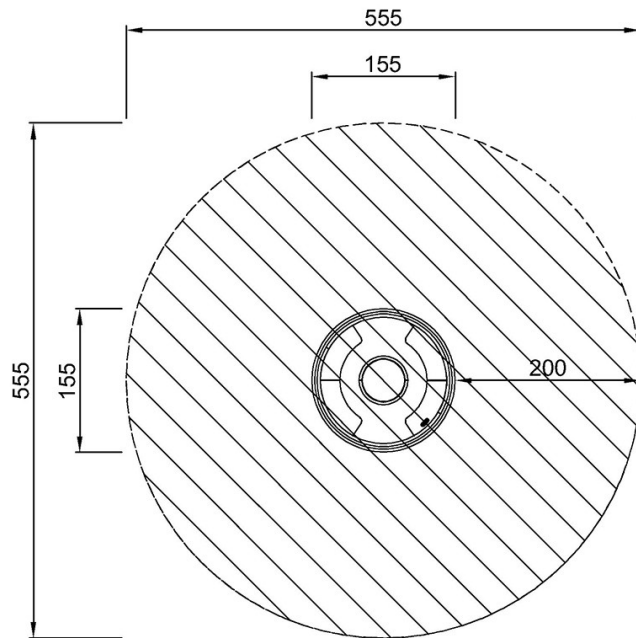

KPL114  
\*100cm  
\*\*71cm  
\*\*\*24.2m<sup>2</sup>

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)