


# Bamboo Trail

CRP250201

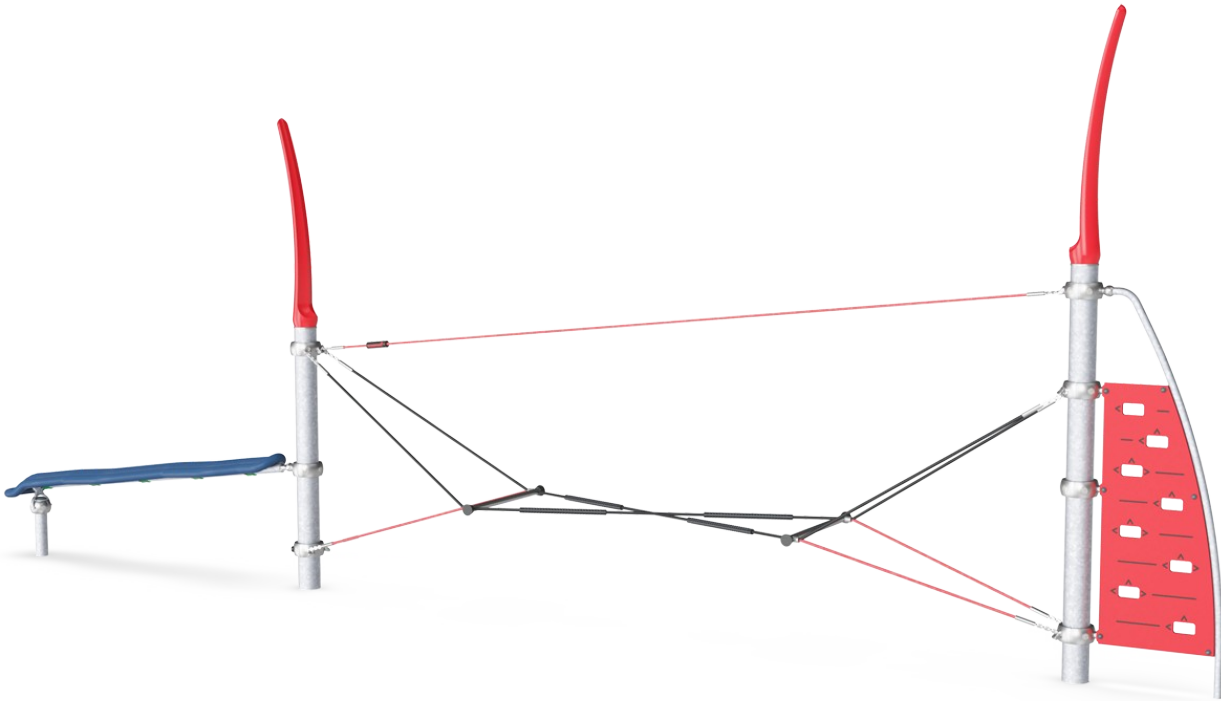


The Bamboo Trail is a great, versatile play invitation in any playground. Its immense appeal will attract children again and again, to try out the tight, bouncy ropes and the varied climbing options. Many children can play at once on the Bamboo trail thanks to the transparent design. This allows for children to see one another, interact and communicate

through the piece. The Climbing Wall can be used from both sides, supporting cooperative play. The challenging Zig-Zag Slider offers rich training of coordination and muscles, and a firm surface in the bouncy surroundings. The trail sways and bounces back the child's movements, adding an element of thrill and concentration to every step. Climbing here is

great fun and may pave the way to friendships for life.



|                             |   |
|-----------------------------|---|
| Item no. CRP250201-0901     |   |
| General Product Information |   |
| Dimensions LxWxH            | 978x97x409 cm   |
| Age group                   | 6+  |
| Play capacity (users)       | 10  |
| Colour options              | <span style="color: red;">●</span> <span style="color: green;">●</span> <span style="color: orange;">●</span> |

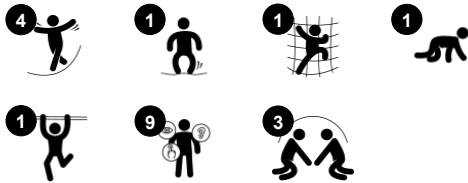


# Bamboo Trail

CRP250201




## Zig-zag slider

**Physical:** muscle strength, balance and coordination when climbing up and down, holding tight.

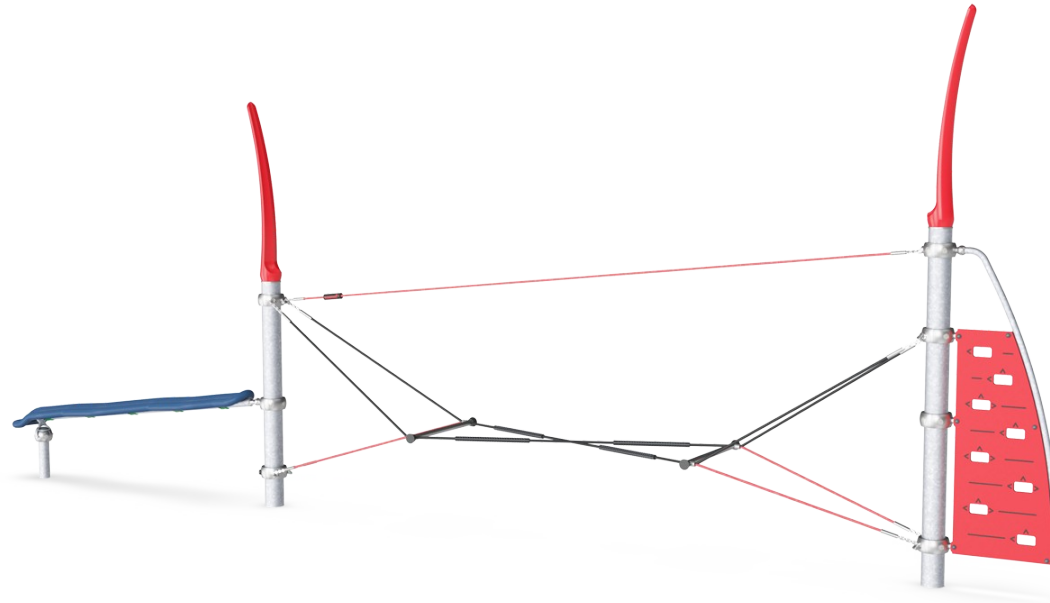

## Climbing wall

**Physical:** climbing here develops cross coordination, which supports cross-modal perception, necessary for other skills such as reading.



## Swaying seesaw

**Physical:** the Swaying Seesaw is a challenging training of balance, spatial awareness, and timing: to bounce each other up and down is a balance quest that takes handholds, hence the supportive ropes. The skills trained here are fundamental for instance for navigating traffic safely. **Social-Emotional:** passing others on the bridge intensely trains cooperation and communication skills.

# Bamboo Trail

CRP250201



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.




Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.


|                          |                          |
|--------------------------|--------------------------|
| Item no. CRP250201-0901  |                          |
| Installation Information |                          |
| Max. fall height         | 185 cm                   |
| Safety surfacing area    | 49.0 m²                  |
| Total installation time  | 11.0 hours               |
| Excavation volume        | 5.72 m³                  |
| Concrete volume          | 3.40 m³                  |
| Footing depth (standard) | 90 cm                    |
| Shipment weight          | 415 kg                   |
| Anchoring options        | Surface ✓<br>In-ground ✓ |
| Warranty Information     |                          |
| Aluminium clamps         | 10 years                 |
| Hot dip galvanised steel | Lifetime                 |
| Painted toplayer         | 10 years                 |
| Ropes & nets             | 10 years                 |
| Spare parts guaranteed   | 10 years                 |

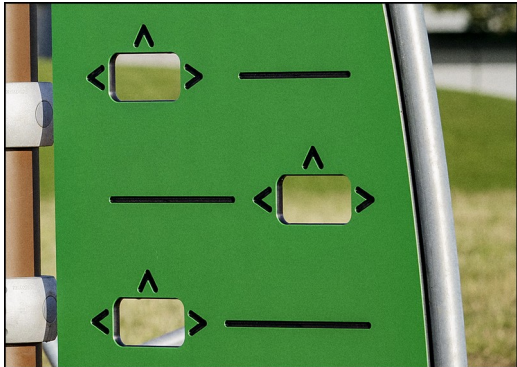

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Rocking tube is made of medium density PE with excellent impact strength and usable within a large temperature span. Hollow plastic components are made of 100% recyclable PE made from 33% post-consumer materials. Molded in one piece with minimum 5mm wall thickness. The longitudinal grooves provides a slip resistant surface for safe play.

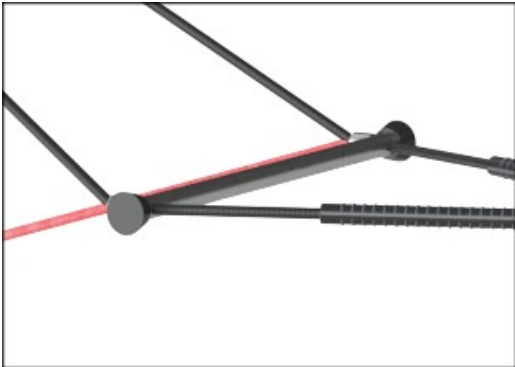


The stainless steel components are made of high quality stainless steel in compliance with global playground standards. The steel is glass blasted after manufacturing to ensure a smooth gliding surface.



# Sustainability Data

CRP250201

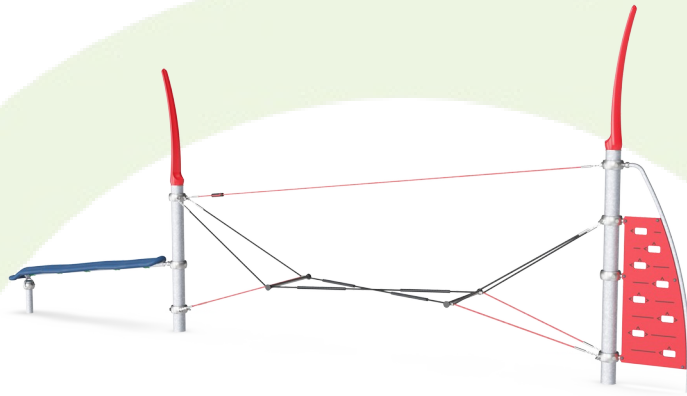

| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
|                      | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| CRP250201-0901       | 1,080.25                       | 3.35                    | 44.95              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

## Kompan A/S

C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000





# Bamboo Trail

CRP250201

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

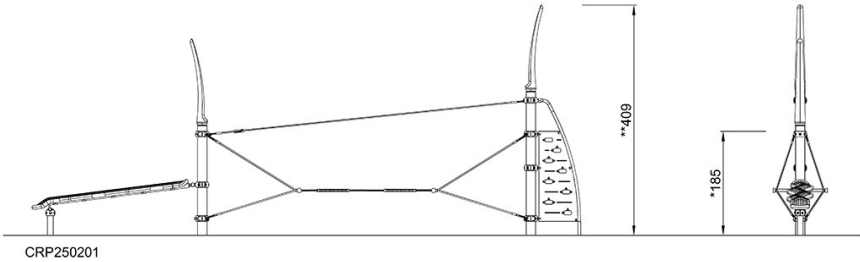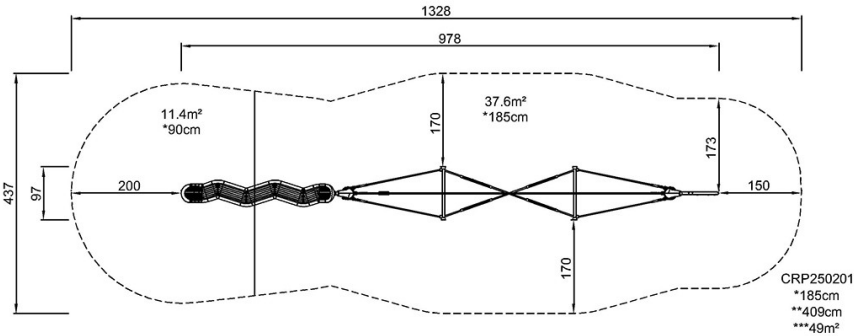

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)