
PCE111923





Item no. PCE111923-0901 **General Product Information** Dimensions LxWxH 654x519x460 cm Age group Play capacity (users) Colour options

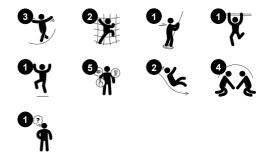

instance, reading skills. The slides and the banister bars are thrilling paths to return to the ground. Jacob's ladder offers climbing with a cognitive challenge, when children figure out how to move their bodies to reach the top. Apart from climbing and sliding, there are plenty of opportunities for social play that will help children to build important social and

emotional skills, and will motivate children to play for longer.



Wow! The Makalu is a fantastic structure that

encourage children to play longer and come

back more often. The Makalu offers ample

climbing and sliding for active children. The

varied climbing units train proprioception and

for children's cross-modal perception and, for

cross-body coordination which are fundamental

attracts children from afar. The activities

PCE111923









### **Curved slide**

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking.











Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in childhood. Social-Emotional: turn-taking and risk-taking.



#### Pipe ladder

Physical: cross coordination and eye-hand coordination are supported when children climb the ladder. The climbing also supports leg and arm muscles. Social-Emotional: learning about turn taking and cooperation.





Physical: cross coordination and spatial awareness as well as upper body muscles when hanging with arms. This is especially important due to sedentary lifestyles of today's children. Social-Emotional: turn-taking and cooperation. Cognitive: logical thinking when going from 2nd to 3rd step, changing feet.




PCE111923



10 years

10 years

2 years

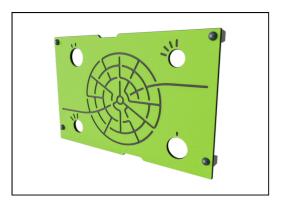

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The ELEMENTS roofs are made of recyclable PE made from 33% post consumer recycled materials with a minimum wall thickness of 5 mm to ensure high durability in all climates around the world. The steel pipes are hot dip galvanised inside and outside for maximum durability.



Sails of commercial 95 high density PE knitted specially for sun-shade structures. The sails are treated with UV stabilizers to ensure a long lifetime. The sails are supported by a hot dip galvanised steel frame and tightened by stainless steel devices




PP Decks

Spare parts guaranteed

Sun shading sails

installation information				
Max. fall height	22	1 cm		
Safety surfacing area	49	.1 m²		
Total installation time		17.3		
Excavation volume	0.7	74 m³		
Concrete volume	0.07 m³			
Footing depth (standard)	90 cm			
Shipment weight	569 kg			
Anchoring options	In-ground	~		
	Surface	~		
Warranty Information				
EcoCore HDPE	Lifetime			
Post	10 years			

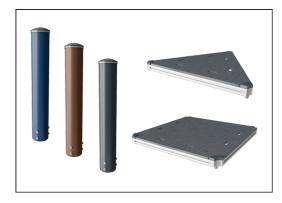

The main posts are made of high quality pregalvanized steel with powder coated top finish. Post tops are closed with caps of UV stabilized nylon (PA6). The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface. All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options.



The slides are available in either molded PE made from 33% recycled post-consumer materials in different colors or in full AISI304 stainless steel with a thickness of 2mm.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



3 / 11/14/2024 Data is subject to change without prior notice.

# **Sustainability Data**

PCE111923





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCE111923-0901	921.15	2.12	57.66

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Play systems



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





PCE111923



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

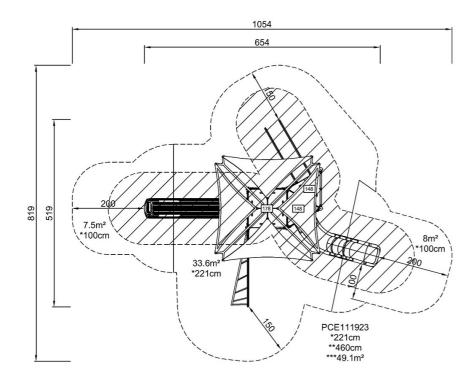

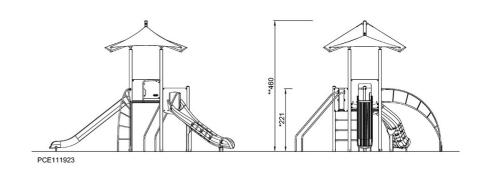

Click to see TOP VIEW

Click to see SIDE VIEW