


# Surface Challenge 5

FSW225

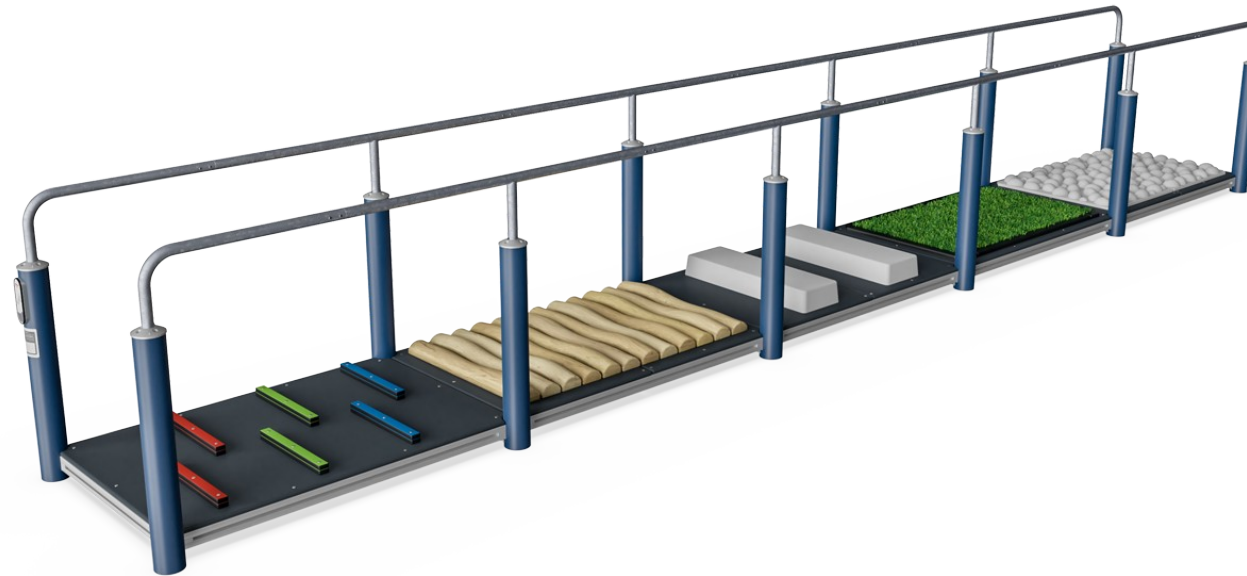

Item no. FSW22500-0902

## General Product Information

Dimensions LxWxH 101x712x105 cm


Age group 13+

Play capacity (users) 9

Colour options 



See KOMPAN Fit app for more

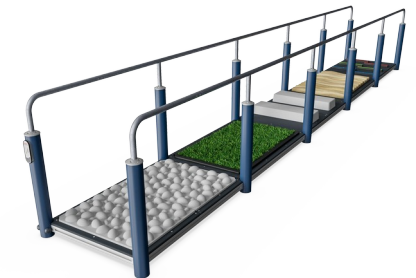

One of the major problems for elderly people is falling. These accidents often happen because the elderly person is not able to overcome or react to minor changes in the surface. The surface challenge gives the opportunity to, under safe conditions, train to overcome typical obstacles found in nature and urban environments. Some of the challenges here


focuses on the important toe-lift. Either on small obstacles or bigger ones like the curb. Other challenges focuses on ankle- and overall foot control. Finally, the different surfaces and materials stimulates sensory feedback which also enhances gait stability.

# Surface Challenge 5

FSW225




The Robinia bars are made from de-barked and sap free Robinia trunks in various dimensions. Robinia is a native European wood species with high strength and natural durability in various climatic conditions. KOMPAN uses wood from FSC-certified sources.



The stone surface is made from polymer concrete (polyester concrete), which is a mixture of sand, gravel and dust mixed with polyester. The material is five times stronger and more waterproof than ordinary concrete, which gives it a very long lifespan and very low maintenance.



Handrail intended as grips during exercises are made of hot-dip galvanised steel  $\varnothing 38\text{mm}$ , a great diameter for a good grip and to support the wrist. The height of the handrail is 940mm from the top of the HPL plate. The distance between the rails is 900mm.

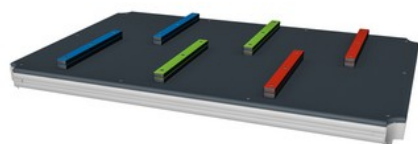

All challenges are mounted on HPL plates of 1396x896x18mm. High-pressure laminate plates (HPL) have a moulded-in non-skid surface and HPL is a homogenous material with a very high wear resistance.



The grass area is 1210x710mm. The grass is tufted, non-filled synthetic grass, which is glued to the HPL plate with Polyurethane adhesive (Henko H400 or H700). The HPL plate has draining holes to remove the water quickly.



The information sign is made of a PA6 (Polyamide) and shows the most relevant exercise and a QR code. When scanned the QR code will link to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN sport & fitness App, which will provide a large amount of exercises and workouts.

Item no. FSW22500-0902

### Installation Information

Max. fall height	20 cm
Safety surfacing area	38.3 m <sup>2</sup>
Total installation time	12.2
Excavation volume	0.34 m <sup>3</sup>
Concrete volume	0.18 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	749 kg
Anchoring options	In-ground ✓ Surface ✓


### Warranty Information

Connectors	10 years
Hot dip galvanised steel	Lifetime
HPL decks	15 years
Post	10 years
Spare parts guaranteed	10 years



# Sustainability Data

FSW225

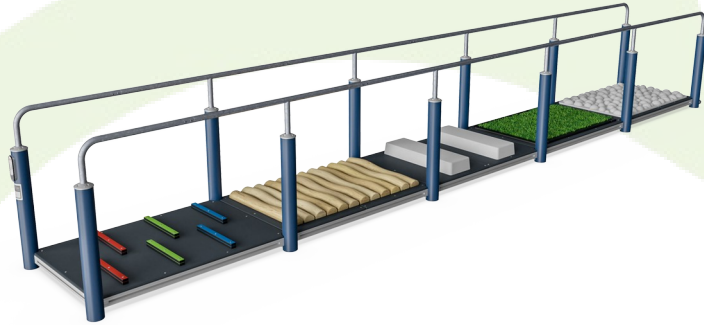

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>FSW22500-0902</b>	908.99	1.84	21.56

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Fitness



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000




# Surface Challenge 5


FSW225

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

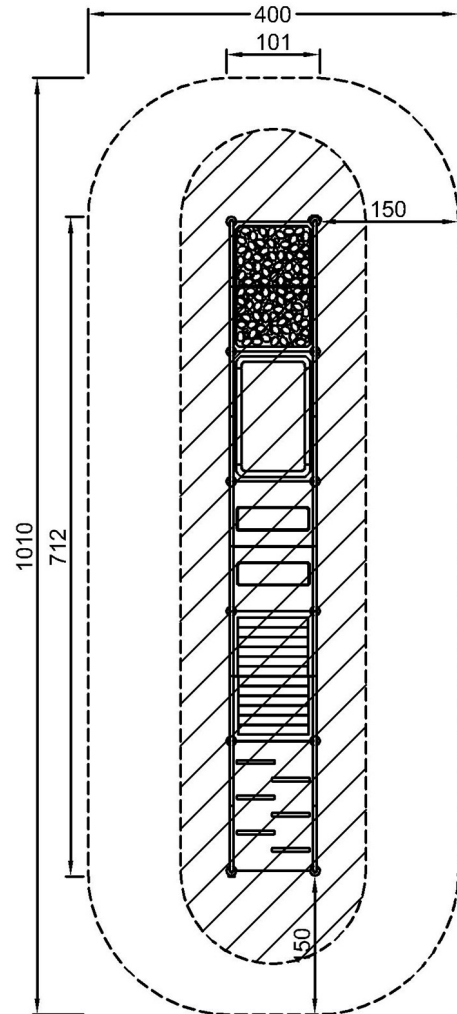

FSW22500  
\*20cm  
\*\*105cm  
\*\*\*38.3m<sup>2</sup>



[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)