Over Under

FPW214



Item no. FPW21400-0900		
General Product Information		
Dimensions LxWxH	152x566x118 cm	
Age group	8+	
Play capacity (users)	4	
Color options		



Trained athletes will go over the high bar and underneath the low bar, while the beginners will do it the other way around. A great way to train, strength, agility, coordination and flexibility. The Over Under obstacle is a great example that everyone can be challenged at their own level. The bars are positioned closely to another therefore a combination of lower body and upper body strength is required to overcome this obstacle. Rounded corners make it safe and simple for anyone to try exercises in which they swing over their legs over the bar.





Over Under

FPW214





Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.





The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers. Bars intended as grips during exercises are made of hot-dip galvanised steel ø38mm. A great diameter to support the wrist when doing dips or handstands.

Item no. FPW21400-0900			
Installation Information			
Max. fall height	11	8 cm	
Safety surfacing area	35.9 m²		
Total installation time	3.7		
Excavation volume	0.23 m³		
Concrete volume	0.10 m³		
Footing depth (standard)	90 cm		
Shipment weight	182 kg		
Anchoring options	In-ground 🗸		
	Surface	~	
Warranty Information			
Hot dip galvanised steel	Lifetime		
Post	10 years		
Spare parts guaranteed	10 years		



Sustainability Data

Cradle to Gate A1-A3


FPW21400-0900

FPW214



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

206.63

CO2e/kg

kg CO₂e/kg

2.01

Recycled


materials

%


66.57

Over Under

FPW214





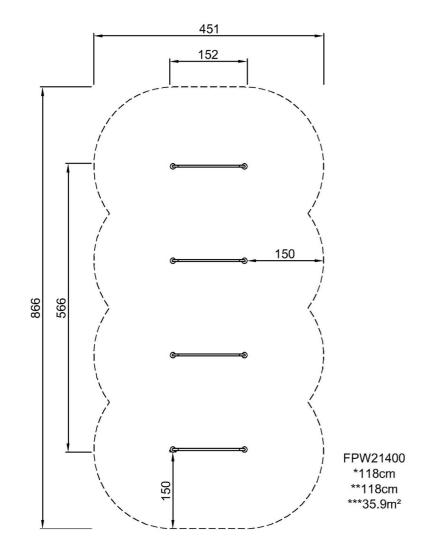



* Max fall height | ** Total height

Click to see TOP VIEW