NRO115





General Product Information

Dimensions LxWxH 73x48x68 cm
Age group 3+
Play capacity (users) 1
Colour options









The Snail with its chunky, rocking body attracts toddlers for shorter or longer rides, again and again. Apart from its appealing shape, the Snail offers tactile variation with its steel hand hold, rubber foot support and smooth, wooden body. Tactile richness is a main motivator, especially in younger children. It sup-ports their understanding of material characteristics such

as weight, smoothness, temperature and flexibility. This is important in for instance risk management. The spring ensures hours, years and decades of fun. The soothing, rocking movement of the Snail trains the sense of balance and the spatial awareness. These are crucial for body confidence, e.g. in avoiding falling. A good sense of balance is essential for

the ability to sit still and concentrate. So this is much more than a mere fun ride.





NRO115







Handhold

Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.









Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Foot support

Physical: the possibility of footrest supports intensive rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely.





Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.

NRO115



60 cm

6.5 m²

5 years

Lifetime

2.2



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



The paint used for coloured components is water based environmentally friendly with excellent UV resistance. The paint is in compliance with EN 71 Part 3.



Handles and footrests are made of high-quality stainless steel and equipped with moulded on PUR handholds and footsteps. The PUR footrests are designed with groves to make the surface slip resistant.



Excavation volume 0.17 m³ Concrete volume 0.00 m³ Footing depth (standard) 42 cm Shipment weight 59 kg In-ground Anchoring options Surface **Warranty Information** PUR components 10 years Robinia wood 15 years 10 years Spare parts guaranteed

Item no. NRO115-0401
Installation Information



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



The Robinia wood can be supplied as untreated raw wood or painted with a brown coloured transparent pigment that maintains the golden wood colour of the wood.



Springs

Stainless steel

components

3 / 05/23/2024 Data is subject to change without prior notice.

Sustainability Data

NRO115





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
NRO115-0401	82.03	1.49	32.39


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

NRO115




* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

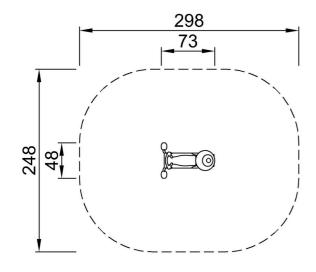

NRO115 *60cm **70cm ***6.5m²

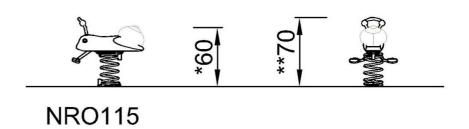

Click to see TOP VIEW

Click to see SIDE VIEW