Up and Over Net

NRO812



Item no. NRO812-1001				
General Product Information				
Dimensions LxWxH	210x140x140 cm			
Age group	4+			
Play capacity (users)	2			
Color options				



The Up and Over Net is a quite a challenge, that trains basic motor skills. Children use their cross-coordination, proprioception and their muscles when they embark on the net and climb over the sturdy top beam to the other side. The wide spacing between the rungs is great for leg, arm and core muscles. The three meshes allow for more children to climb together. The fact that there are then only two meshes when they reach the top means that children get to use and expand socialemotional skills such as turn-taking and negotiation. The top beam is the perfect destination for a break with friends. Navigating up and down is good for training the sense of space which helps children estimate distances and risks in street traffic.



Up and Over Net

NR0812







Top beam Physical: climbing over the top beam demands good spatial awareness and involves risk taking. Social-Emotional: fine destination for a break with friends.



Climbing net

Physical: the inclined net supports the upward climbing movement of the body. The net supports cross-body coordination, which impacts coordination of the right and left part of brain, fundamental for other skills such as the ability to read. The asymmetry of the net challenges the children's climbing.

Up and Over Net

NR0812





All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



Nets and ropes are made of UV-stabilised PA with inner steel cable reinforcement. The rope is induction treated in order to create a strong connection between steel and rope which leads to good wear resistance. The Robinia wood can be supplied as untreated raw wood or painted with a brown coloured transparent pigment that maintains the golden wood colour of the wood.

Item no. NRO812-1001				
Installation Information				
Max. fall height	11() cm		
Safety surfacing area	18.	0 m²		
Total installation time		3.4		
Excavation volume	0.8	7 m³		
Concrete volume	0.0	2 m³		
Footing depth (standard)	100) cm		
Shipment weight	12	7 kg		
Anchoring options	In-ground	~		
	Surface	~		



Sustainability Data

NR0812



Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
NRO812-1001	66.09	0.65	6.08

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



Data is subject to change without prior notice.


By Bureau Veritas HSE

www.bureauveritas.dk

+45 7731 1000





NR0812





* Max fall height | ** Total height

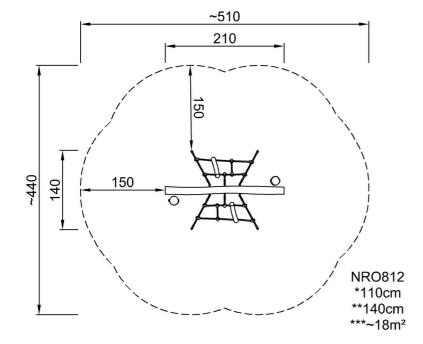



NR0812

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 07/10/2024