
Twin Ring Sky Carousel

PCM151



Item no. PCM151-0901				
General Product Information				
Dimensions LxWxH	3'8"x3'8"x6'0"			
Age group	5 - 12			
Play capacity (users)	6			
Color options				

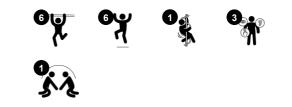

The Sky Carousel is a playground hit that attracts school age children again and again. It adds thrill and fun. It also helps to strengthen muscles when hanging in arms and jumping on. It supports bone density when children jump off. The physical benefits are immense, as the rotation combined with the jumping off trains the senses of balance an space immensely. These are the fundament of physical confidence. They help children to for instance sit still and concentrate. They help them manage and time their body movements securely in space, for instance when crossing a street. The two levels and steps support children of different sizes to access the spinning experience. The rings provide high play capacity, which in turn spurs rough-andtumble play and cooperation. This adds a huge social-emotional benefit for children.

Twin Ring Sky Carousel

PCM151



Vertical bar Physical: pushing or pulling the Sky carousel into motion, children use their muscles and strengthen their cardio. Social-Emotional: listening and negotiating if someone wants to get off, children develop their empathy and cooperation skills.







Foot support Social-Emotional: invites a wide user range and provides an ease of entry for smaller or less confident users.



Upper and lower handhold

Physical: balance, spatial awareness and coordination are developed when spinning around, as well as arm and core muscles when holding tight. Jumping off strengthens bone density, which is built for life in early childhood. Social-Emotional: turn-taking, cooperation and empathy are trained when many children are spinning together.

Twin Ring Sky Carousel

PCM151







The upper twin ring has a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Steps are made of PUR. It retains their properties in the temperature range of -30°C to 60°C. Step is stabilized to a maximum without use of heavy metal stabilities.

Heavy duty engineered bearing system with single row deep groove ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and maintenance free.

Item no. PCM151-0901						
Installation Information						
Max. fall height		5'8"				
Safety surfacing area	3	375ft²				
Total installation time		2.7				
Excavation volume	0.0	65yd³				
Concrete volume	0.3	38yd³				
Footing depth (standard)		3'3"				
Shipment weight	2	78lbs				
Anchoring options	In-ground	~				
	Surface	~				
Warranty Information						
Bearing construction	5`	Years				
Hot dip galvanized steel	Life	etime				
Painted toplayer	10 `	Years				
Spare Parts Availability	10 Years					



The steel surfaces are hot-dip galvanized inside and outside with lead-free zinc. The galvanization has excellent corrosion resistance in outside environments and requires minimal maintenance.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1







Sustainability Data

Cradle to Gate A1-A3

PCM151-0901

Total CO2

emission

kg CO₂e

293.34

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which

CO2e/kg

kg CO₂e/kg

3.09

PCM151



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Recycled


materials

%


44.40




PCM151





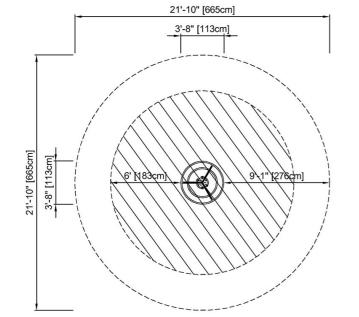

PCM151 * 5'-8" / 172cm ** 5'-11" / 182cm *** 373.9ft² / 34.8m²

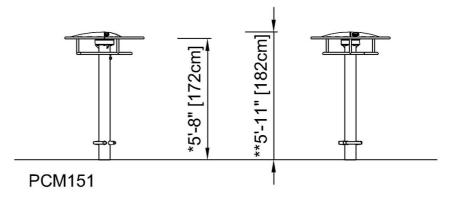

* Max fall height | ** Total height

Click to see TOP VIEW

Click to see SIDE VIEW