




The Scout is a fun, dense play event for school age children. With its world explorer look, it attracts children back for more play over and over. The challenging climbs up to the slide train children's balance, cross-coordination and proprioception. The Jacob's Ladder has a special feature in the twist of the 3rd step: this makes a change of foot position necessary to

go further. The mastery of this proprioceptive action is only possible for children of a certain age. So there are ways up and around the Scout for bigger and lesser dare devils. The motor skills trained are important for children's physical confidence and security in moving, for instance in the street. The sense of balance and space are trained whizzing down the slide.

The sense of balance is fundamental for all other physical skills.

| | |
|------------------|----------------|
| 产品编号 NAT524-0912 | |
| 产品信息概览 | |
| 长宽高尺寸 | 357x384x267 cm |
| 适用年龄段 | 4+ |
| 容纳人数 | 8 |
| 颜色选择 | ● |

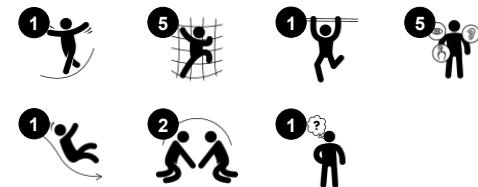



Inclined platform

身体素质：训练平衡感和空间感。**社交情感：**courage, self-confidence, consideration and turn-taking, all important life skills, get practiced.



Climbing semicircle

身体素质：训练交叉协调能力、手眼协调能力和肌肉力量。



滑梯

身体素质：玩滑梯可以培养空间感和平衡感。此外，在直立向下坐时，核心肌肉也能得到锻炼。**社交情感：**轮流玩耍时可激发同理心。



Jacob's ladder


身体素质：在双臂悬垂时，儿童的交叉协调能力、空间意识以及上身肌肉得到锻炼。在如今儿童久坐不动的生活方式背景下，这一点尤为重要。**社交情感：**培养轮流和合作意识。**认知能力：**从第二步到第三步，换脚时的逻辑思维。



立柱和板材由欧洲符合可持续来源的松木制成。根据 EN335 标准，木材用 Tanalith E3475 标准进行 3 级压力浸渍（相当于 NTR AB 级）。根据要求，可提供 FSC® 认证（FSC®C004450）。



19 毫米 EcoCore™ 面板。EcoCore™ 是一种高度耐用、环保的材料，不仅在使用后可回收利用，而且还包含由 100 % 食品包装可循环材料制成的芯。

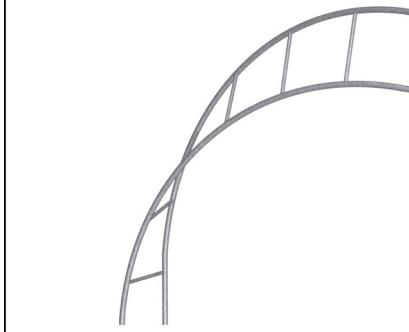

钢表面在内部和外部均用无铅锌进行热浸镀锌。镀锌在外部环境中具有出色的耐腐蚀性，并且维护成本低。

产品编号 NAT524-0912

安装信息

| | |
|--------|---|
| 最大跌落高度 | 223 cm |
| 安全面积 | 33.4 m ² |
| 安装总时长 | 10.5 |
| 开挖量 | 0.66 m ³ |
| 混凝土使用量 | 0.15 m ³ |
| 标准入地深度 | 90 cm |
| 运输重量 | 392 kg |
| 固定选项 | 入地 <input checked="" type="checkbox"/> 地表 <input checked="" type="checkbox"/> |

质保信息

| | |
|--------------|------|
| EcoCore HDPE | 终身质保 |
| 镀锌钢结构 | 终身质保 |
| 松木 | 10 年 |
| 承保零部件 | 10 年 |
| 不锈钢滑梯 | 10 年 |



后端盖由注塑成型的优质尼龙（PA6）制成。PA6 具有良好的耐磨性和冲击强度，并且具有紫外线稳定性。端盖可保护垂直放置的立柱，以确保较长的使用寿命。



滑梯由优质不锈钢 AISI 304 制成。制造后通过全酸洗工艺对钢进行清洁，以确保光滑和清洁的滑动表面。



Sustainability Data

NAT524



从原材料到成品

| | CO ₂ 排放总量 kg CO ₂ e | CO ₂ 排放量/ 千克 kg CO ₂ e/kg | 回收的原料 % |
|--------------------|--|---|------------|
| NAT524-0912 | 575.87 | 2.03 | 44.31 |

这些因素采用的总体框架为环保产品声明 (EPD)，该声明可量化“产品生命周期的环保信息，并对相同功能的产品进行对比” (ISO, 2006)。在遵循该框架的同时，对从原材料到制造的整个产品阶段 (A1-A3) 应用生命周期评估法。

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark

Validation of CO₂
calculation method
BUREAU VERITAS
HSE Denmark A/S



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023




By Bureau Veritas HSE


www.bureauveritas.dk
+45 7731 1000

最大跌落高度 | 总高度 | 安全区域

最大跌落高度 | 总高度

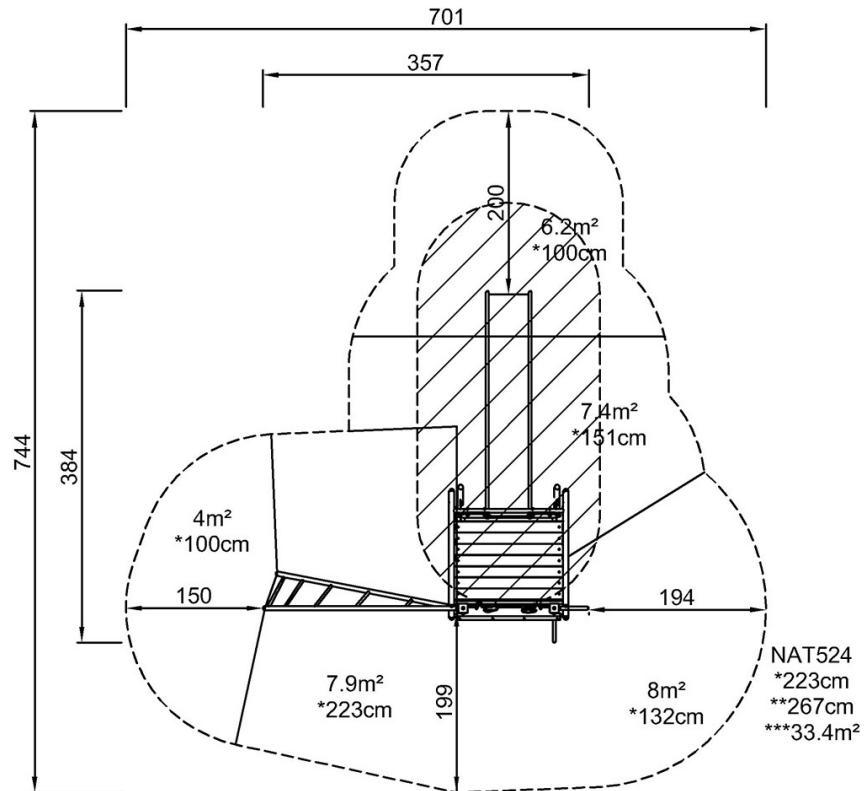

[点击查看俯视图](#)

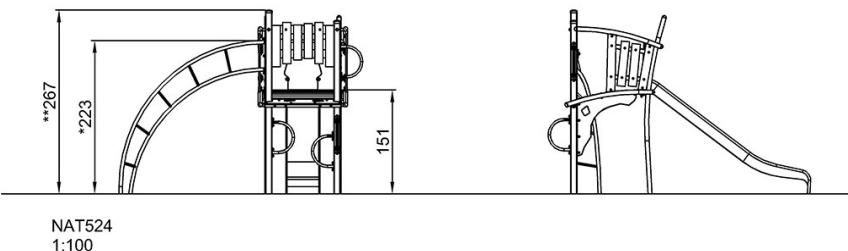

[点击查看侧面图](#)