

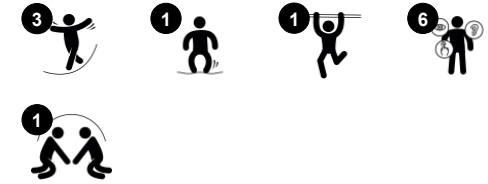


Galago Trail

CRP250101




Item no. CRP250101-0901	
General Product Information	
Dimensions LxWxH	611x97x257 cm
Age group	6+
Play capacity (users)	8
Colour options	

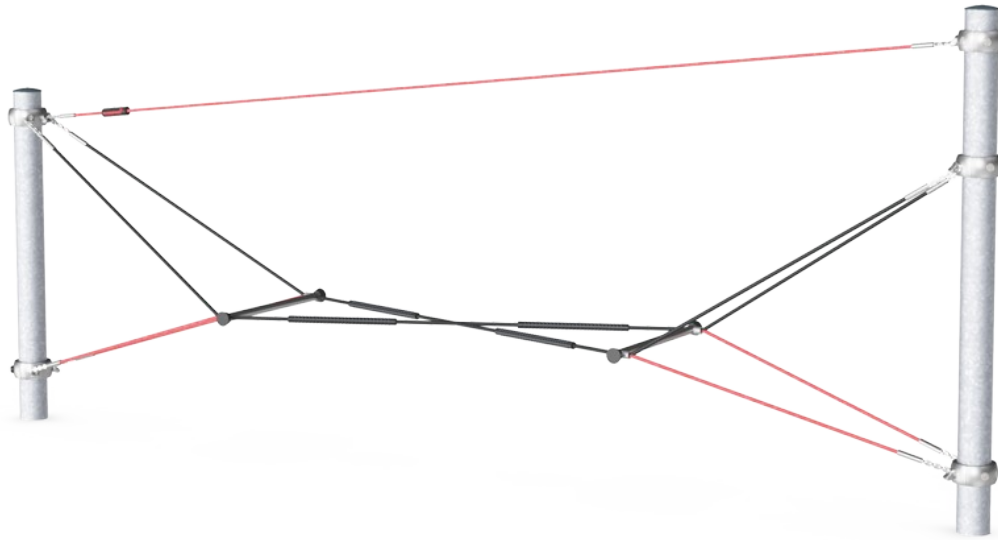

Wow! The Galago Trail invites bouncy balancing and tight-rope walking play acts in any playground. Children will seek it out again and again to experience the tight, bouncy response of the suspended ropes. The Galago Trail sways and bounces back the child's movements, adding an element of thrill and concentration to every step. Climbing here with

friends makes it even more fun, as their movements will be reflected, too. This hugely trains the sense of balance and the proprioception of the children. These are important skills for motor control and managing the body securely through space. The crossing of the lower rungs calls for negotiation when passing other climbers on the Galago Trail.

This trains important social-emotional skills such as empathy and negotiation.

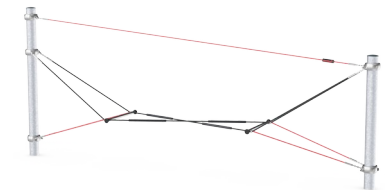


Galago Trail

CRP250101



Swaying seesaw

Physical: the Swaying Seesaw is a challenging training of balance, spatial awareness, and timing: to bounce each other up and down is a balance quest that takes handholds, hence the supportive ropes. The skills trained here are fundamental for instance for navigating traffic safely. **Social-Emotional:** passing others on the bridge intensely trains cooperation and communication skills.

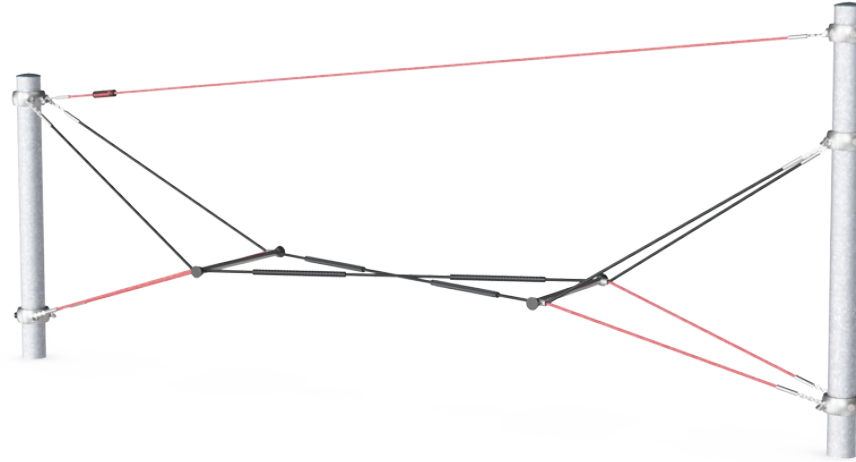

Galago Trail

CRP250101



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

Item no. CRP250101-0901

Installation Information

Max. fall height	180 cm
Safety surfacing area	33.5 m ²
Total installation time	6.6
Excavation volume	5.20 m ³
Concrete volume	2.89 m ³
Footing depth (standard)	90 cm
Shipment weight	326 kg
Anchoring options	Surface ✓ In-ground ✓


Warranty Information

Aluminium clamps	10 years
Hot dip galvanised steel	Lifetime
Painted toplayer	10 years
Ropes & nets	10 years
Spare parts guaranteed	10 years



Sustainability Data

CRP250101

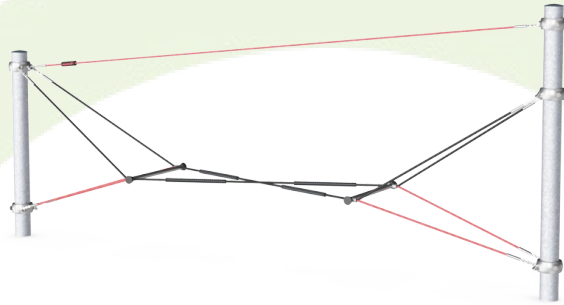

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
CRP250101-0901	718.64	3.46	44.85

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Galago Trail

CRP250101

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

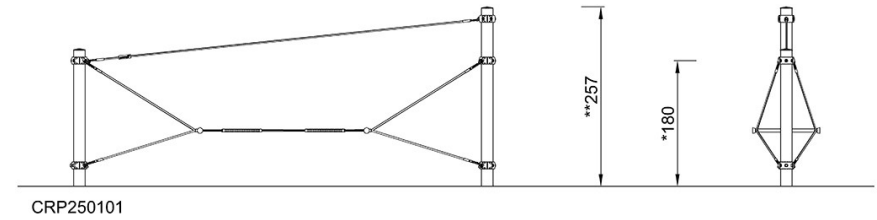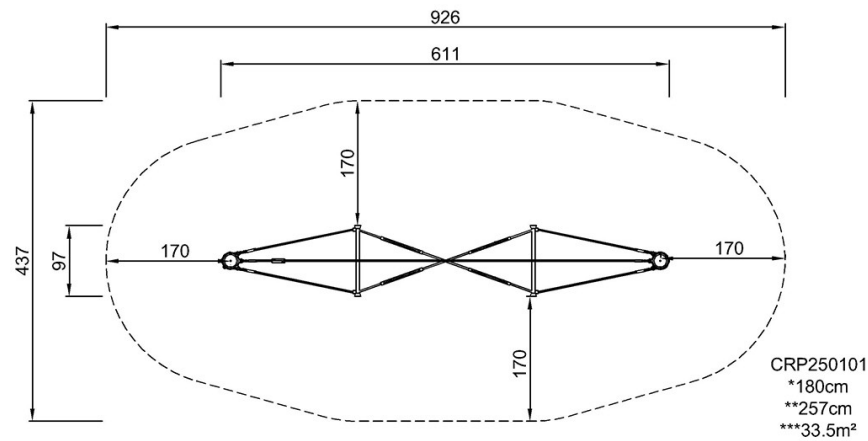

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)