
CRP201001





General Product Information

Dimensions LxWxH 1014x1085x341 cm
Age group 2+
Play capacity (users) 51
Colour options

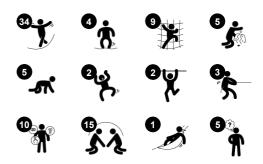

Magnificent play experiences await toddlers who take the Woodland Trail. The richly varied trail will attract toddlers to come back again and again for great adventures with developmental benefits. First and foremost the variation in motor skill challenges is second to none: bouncy ropes and nets, wobbly bridges and hurdles, tunnels and shelters: it's a jungle

of challenges for young adventurers. Apart from being fun, traversing the trail trains important motor skills such as balance, coordination and proprioception, which all instill in the child an understanding of its physical capability and incorporates an understanding of space, shapes and measures which is fundamental for understanding mathematics.

Good motor skills form the basis for body confidence and the ability to move securely through the surroundings. The many meeting places invite socializing and dramatic play, which support the understanding of cultural and social relations that will help make friends for life.





CRP201001











Treehouse Cottage

Physical: the bouncy membrane develops the sense of balance when children stand or sit. Social-Emotional: great point for a break or meeting with friends. The windows invite interaction between inside and outside. **Cognitive:** suggests a theme and supports dramatic play, which stimulates language and communication skills. The bubble window distorts the sound of voice, developing an understanding of cause-and-effect.











Crawl-through hole with bubble window and membrane

Physical: the hole allows for climbing and crawling through, developing crosscoordination, proprioception and spatial awareness. Social-Emotional: cooperation and turn-taking when passing one another. Cognitive: understanding space, shape and measures when seeing if the body fits through the hole. Understanding object permanence when playing games such as peek-a-boo.





Physical: the children crawl through the

reading skills. Social-Emotional: turn-taking

skills are trained when passing each other. Cognitive: understanding space, shapes and

measures when crawling through the tunnel.

tunnel, developing their cross-body coordination which is a fundament for later life







Slalom net bridge

Physical: all muscles are used to hold tight when crossing the bridge. Balance, coordination and spatial awareness are stimulated, which support the ability to navigate securely in space. Social-Emotional: turn-taking and cooperation when passing each other. Cognitive: 'Cause and effect' understanding is supported by the bouncing effect of the movement of others.



Uneven hurdle bridge

movement of others.



Physical: arm, leg and core muscles are

trained when climbing up or through the

bridge. Balance, spatial awareness and

help children move confidently. Social-

supported when passing other children.

is supported by the bouncing effect of the

proprioception are stimulated, motor skills that

Emotional: cooperation and turn-taking are


Cognitive: 'Cause and effect' understanding












Cognitive: 'Cause and effect' understanding is supported by the bouncing effect of the movement of others.











Social-Emotional: cooperating and communicating with others. Enhancing turntaking skills and empathy when waiting their turn. Cognitive: learning about numeracy and time in a tangible way. Creative: setting the clock or placing the sphere at different positions.



CRP201001





Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

Item no. CRP201001-0902

Installation Information Max. fall height 78 cm Safety surfacing area 114.1 m² Total installation time 50.8 Excavation volume 4.75 m³

Concrete volume 2.04 m³

Footing depth (standard) 90 cm Shipment weight 1,781 kg

Anchoring options In-ground



The steel surfaces are hot-dip galvanised inside and outside with lead-free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The large components are made of 100% recyclable PE made from 33% post consumer materials. Molded in one piece with minimum 5mm wall thickness to ensure high durability in all climates around the world.

Warranty Information

Corocord (Hercules) 10 years
Rope
EcoCore HDPE Lifetime
Hollow PE parts 10 years
Galvanised Steel Lifetime
Spare Parts Guarantee 10 years

AS 4685 compliant

Sustainability Data

CRP201001





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
CRP201001-0902	3,664.15	2.80	55.27


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

made

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


CRP201001



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

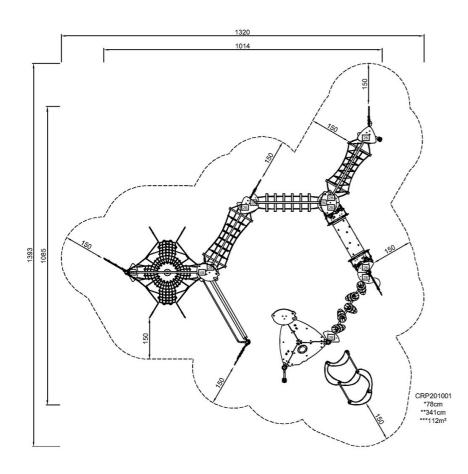



Click to see TOP VIEW

Click to see SIDE VIEW