MUGA, 13 x 26m, WPC

FRE600803





Wood Plastic Composite (WPC) has the same texture and appearance as wood. It is maintenance-free and environmental friendly. WPC fits perfectly into a natural environment. The fully flat inside gives the best bounce experience when playing. This flat wall becomes a part of the game and means the game can flow whilst adding another dimension

that can challenge and develop players' tactical vision of the game. The 3m x 2m Multi-Goal follows the goal size of FIFA Futsal and IHF Handball regulations. The basketball hoop is placed at the official NBA height of 305 cm and has the official NBA size of 46 cm in diameter.

| Item no. FRE600803-0902 | | | | |
|-----------------------------|------------------|--|--|--|
| General Product Information | | | | |
| Dimensions LxWxH | 2613x1323x369 cm | | | |
| Age group | 3+ | | | |
| Play capacity (users) | - | | | |
| Colour options | | | | |





MUGA, 13 x 26m, WPC

FRE600803



10 years



The Wood Plastic Composite panels are made of 100% recycled fibre/wood powder and High-Density Poly Ethylene (HDPE). With the dimensions of 860 x 110 x 30mm the boards are solid.



The hinges on the entrance gate are 16mm and made of Stainless Steel. The handles can be accessed from either side of the pitch.



The posts are made of 80 x 80 x 3mm profile with horizontally, 6mm welded flanges. This will enable easy installation and strong construction. The low-density polyethylene post caps are attached with blind rivets.

| Item no. FRE600803-0902 | | | | | |
|--------------------------|-----------|------|--|--|--|
| Installation Information | | | | | |
| Max. fall height | (| o cm | | | |
| Safety surfacing area | 0. | 0 m² | | | |
| Total installation time | | 54.5 | | | |
| Excavation volume | 2.1 | 3 m³ | | | |
| Concrete volume | 1.4 | 2 m³ | | | |
| Footing depth (standard) | 88 | 5 cm | | | |
| Shipment weight | 3,37 | 5 kg | | | |
| Anchoring options | In-ground | ~ | | | |
| | Surface | • | | | |
| Warranty Information | | | | | |
| EcoCore HDPE | Life | time | | | |
| HDG Post | Life | time | | | |



Each panel has 4 Thermoplastic Vulcanizates plugs connecting the panels to the posts. The plugs reduce the vibration and therefore reduce the noise level. The plugs will also simplify installation as they come with pre-assembled nuts.



The wheelchair entrance is constructed of 80 x 80 x 3mm post with Ø 48mm tube and two stainless steel 16mm hinges. The opening is 95cm wide and 112cm long, which allows wheelchair users to enter the MUGA with ease.



The WPC boards are attached to $70 \times 45 \times 3$ mm welded flanges with stainless steel M8 bolts, nuts and washers. These connections are not visible from the inside and create a safe and robust connection.



Spare Parts Guarantee

Sustainability Data

FRE600803





| Cradle to Gate A1-A3 | Total CO₂ emission | CO₂e/kg | Recycled materials |
|----------------------|-----------------------|------------|--------------------|
| | kg CO₂e | kg CO₂e/kg | % |
| FRE600803-0902 | 5,415.61 | 1.81 | 59.97 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Sport



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Sport" represented by item no.: FRE600202-0901.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000




MUGA, 13 x 26m, WPC


FRE600803

KOMPAN Let's play

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

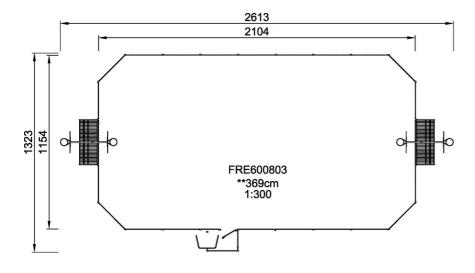



Click to see TOP VIEW

Click to see SIDE VIEW