

Inclusive Parallel Bars

FSW245



The Inclusive Parallel Bars are designed with accessibility in mind, featuring both a standard set and a wider set of bars to accommodate wheelchair users. The overhanging design provides ample space, ensuring ease of use for all. These bars offer a versatile range of exercise options, making them suitable for rehabilitation as well as athletic training. An

ideal addition to any fitness facility, they enhance inclusivity while supporting a wide range of user needs.

Item no. FSW24500-0902	
General Product Information	
Dimensions LxWxH	6'6"x5'10"x3'3"
Age group	13+
Play capacity (users)	2
Color options	




See KOMPAN Fit App for More Information



Inclusive Parallel Bars


FSW245

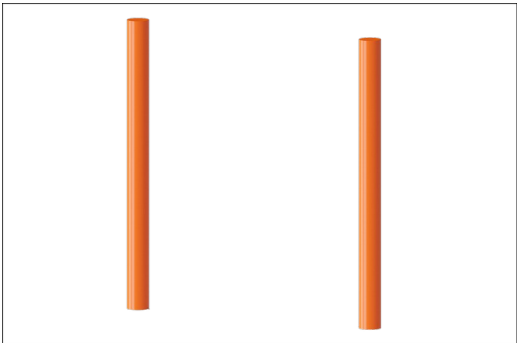

The Steel posts are made of Ø101,6x2,0mm pre-galvanized steel tube. The posts are powder coated, corrosion class C3 according to ISO12944-2.



The inclusive parallel bar is wheelchair accessible and all individuals with a minimum height of 140 cm must be able to use the product without compromising their normal posture.

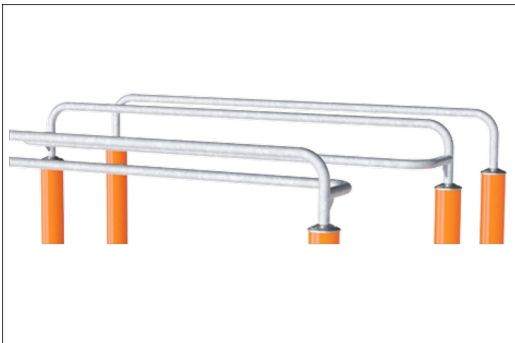


Bars intended as grips during exercises are made of hot-dip galvanized steel ø38mm. A great diameter to support the wrist when doing dips or handstands.

Item no. FSW24500-0902	
Installation Information	
Max. fall height	3'3"
Safety surfacing area	140ft²
Total installation time	3.3 hours
Excavation volume	0.5yd³
Concrete volume	0.27yd³
Footing depth (standard)	2'11"
Shipment weight	295lbs
Anchoring options	In-ground ✓ Surface ✓
Warranty Information	
Hot dip galvanized steel	Lifetime
Spare Parts Availability	10 Years
Steel frame	10 Years



The product must feature an information sign with related exercises, and each exercise must feature a QR code linking to its related exercise portal in an app that offers support on the specific exercise. The sign must additionally offer a QR code for downloading the app.

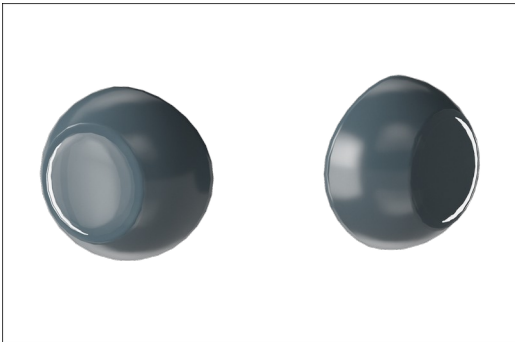

The post top and do-nuts are made from polyamide PA6 nylon.

**ASTM
F3101**
compliant

Sustainability Data

FSW245



Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
FSW24500-0902	207.24	2.13	63.20

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

KOMPAN
Let's play

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Fitness



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000




Inclusive Parallel Bars


FSW245

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

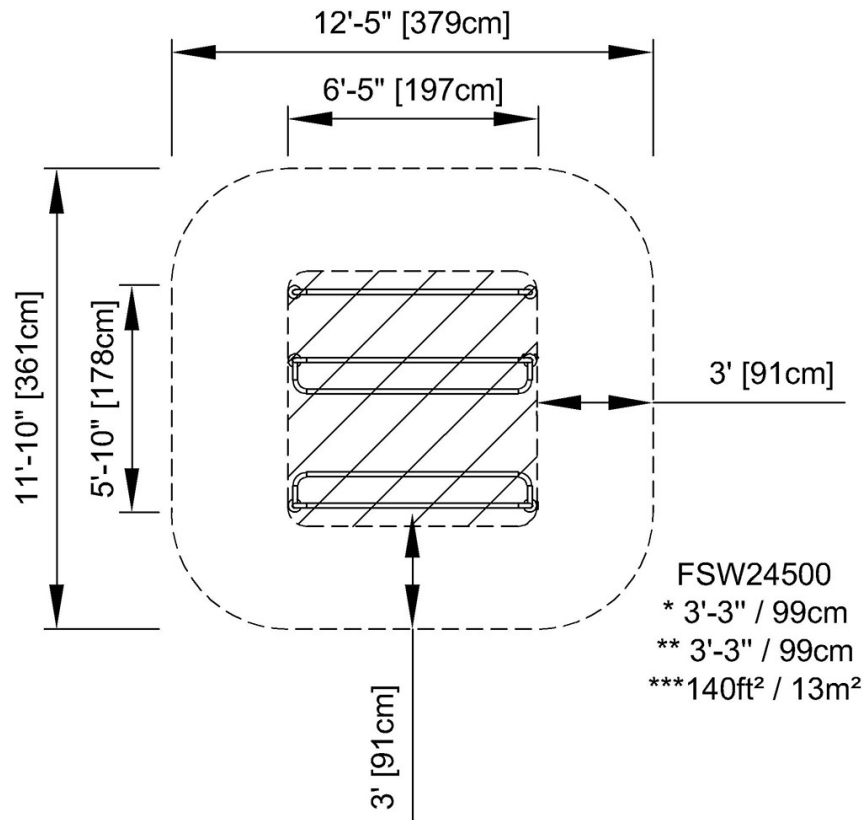

[Click to see TOP VIEW](#)

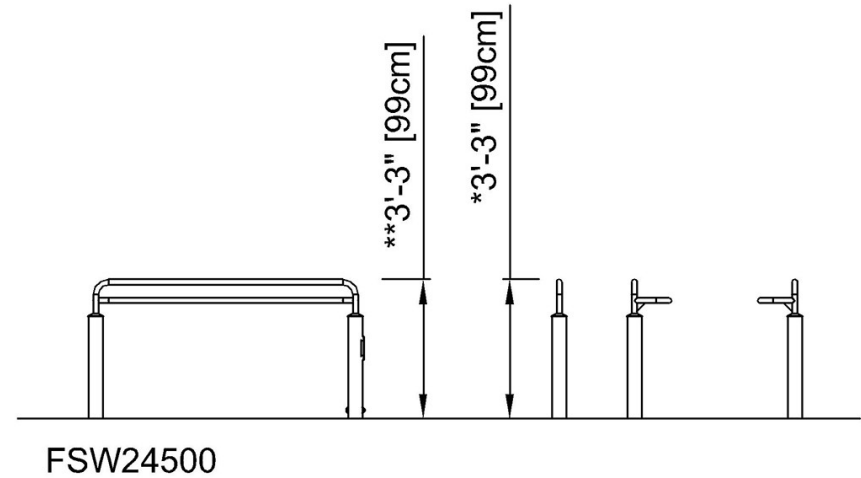

[Click to see SIDE VIEW](#)