Embankment Slide, 2.0m high, 1.0m wide

KSL30502



Item no. KSL30502-0401				
General Product Information				
Dimensions LxWxH	352x104x97 cm			
Age group	3+			
Play capacity (users)	2			
Color options	•			



The Embankment Slide is extremely attractive. It makes children loop up hill and slide down again and again. The Embankment Slide will be a main attraction in a playground. Apart from the immense thrill of sliding, the Embankment Slide also supports children in developing important motor skills such as the sense of balance and space. These are important in managing the world confidently and securely. The repeated loop of sliding and running back up for one more go is great training of cardio and muscle strength. Gaining the courage to go down the tall slide adds a sweet sensation of achievement. This is a social-emotional benefit, which is further enhanced by the cooperation and turn-taking skills that children going down the slide together.





Embankment Slide, 2.0m high, 1.0m wide


KSL30502





Wide slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: invites socializing, supports parent-child and peer-to-peer play. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.

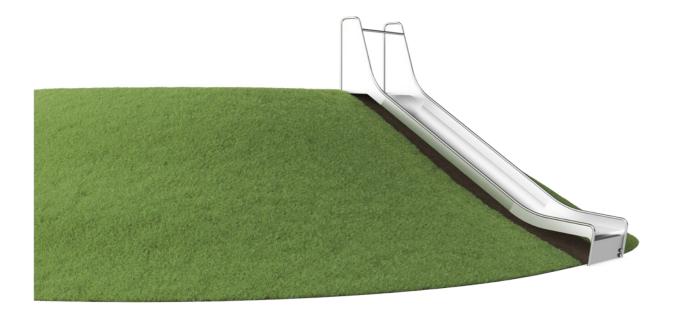

Embankment Slide, 2.0m high, 1.0m wide






KSL30502

The stainless steel components are made of high quality stainless steel in compliance with global playground standards. The steel is glass blasted after manufacturing to ensure a smooth gliding surface.



At 35°, the slide is set to the optimum angle to ensure both gliding fun and safety.



Catering to different terrains, the embankment slides are available in 9 lengths from 1 - 3m.


Item no. KSL30502-0401				
Installation Information				
Max. fall height	100	cm		
Safety surfacing area	20.4	m²		
Total installation time	(6.6		
Excavation volume	0.83	m³		
Concrete volume	0.53	m³		
Footing depth (standard)	110	cm		
Shipment weight	416	kg		
Anchoring options	In-ground	•		

Warranty Information	
Spare parts guaranteed	10 years
Stainless steel slide	10 years



Sustainability Data

KSL30502

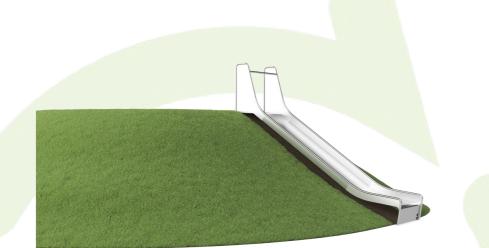

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
KSL30502-0401	842.04	4.20	49.97

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



+45 7731 1000

By Bureau Veritas HSE


www.bureauveritas.dk



KSL30502

* Max fall height | ** Total height | *** Safety surfacing area

*100

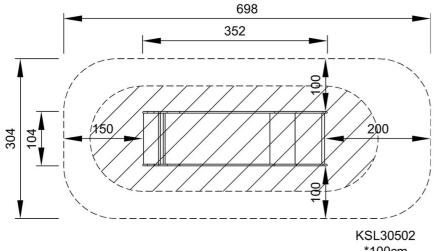

KSL30502 *100cm **97cm ***20.4m² 16

200

KSL30502

