



Item no. PCM100232-0901			
General Product Information			
Dimensions LxWxH	13'8"x12'6"x9'2"		
Age group	2 - 5		
Play capacity (users)	10		
Color options			





The attractive Play Tower is a magnet for children. It encourages active physical play time and again. The accessible stair-way provides an age-appropriate access to the tower and teaches younger children to climb stairs, alternating feet, an important everyday task. On the elevated level, a nice play house offers a great meeting point. Sliding down is a

thrilling play activity, which also trains trunk stability and the sense of balance. The slide is wide enough for sliding down in a lying position too. The curly climber is a wonderful play activity which stimulates the sense of space and the proprioception as children place their hands correctly for rotating down to the ground. Apart from the fun, this is wonderfully

supportive at the same time, for all.





PCM100232



Desk Social-Emotional: fine meeting place and a space creator. Sharing and cooperation from both sides create a social scenario that supports communication and cooperation.





Accessible stairway Physical: climbing the accessible stairway is for all and supports cross coordination as well as arm and leg muscles. For young children, walking stairs and alternating feet is developed. Social-Emotional: room for active breaks and adult helpers. An inclusive space.



Slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.



Curly climber

Physical: coordination and proprioception are supported when placing arms and legs correctly for going down. Sense of balance when rotating. Arm muscles for holding tight. Social-Emotional: empathy stimulated by turn-taking. Cognitive: logical thinking when placing arms and legs right for rotating downward.



PCM100232



Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.




Main posts with hot-dip galvanized steel footing are available in different materials: Pressure impregnated pinewood posts. Pre-galvanized inside and outside with powder-coated top finish steel posts. Lead-free aluminum with color anodized top finish. Greenline TexMade posts of 100% post-consumer recycled PE and textile waste.



All decks are supported by uniquely designed low-carbon aluminum profiles with multiple attachment options. The grey-colored molded decks are made of 75% post-consumer ocean waste PP material with a non-skid pattern and texture surface.

Item no. PCM100232-0901				
Installation Information				
Max. fall height		6'8"		
Safety surfacing area		445ft ²		
Total installation time		16.2		
Excavation volume	0	.71yd³		
Concrete volume	0	.03yd³		
Footing depth (standard)		2'11"		
Shipment weight	12	208lbs		
Anchoring options	Surface	~		
	In-ground	~		
Warranty Information				
EcoCore HDPE	Li	fetime		
Post	10	Years		
PP Decks	10	Years		
Ropes & nets	10	Years		
Spare Parts Availability	10	Years		

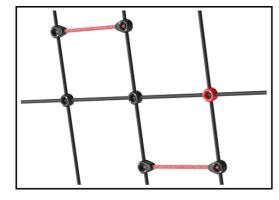

Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to ensure excellent wear and tear resistance.



Wood version of FSC®-certified (FSC®C004450) pine wood with pressure impregnated base treatment and brown painted top finish. Vertical boards and top ends protected by a unique aluminum profile for high outdoor durability.

Elevated activities	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present			
Required			

Sustainability Data

PCM100232



C	Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
		kg CO₂e	kg CO₂e/kg	%
	PCM100232-0950	638.44	1.36	74.41
	PCM100232-0901	719.46	1.71	68.40

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


Publication date: 30. October 2023




www.bureauveritas.dk +45 7731 1000

PCM100232

* Max fall height | ** Total height

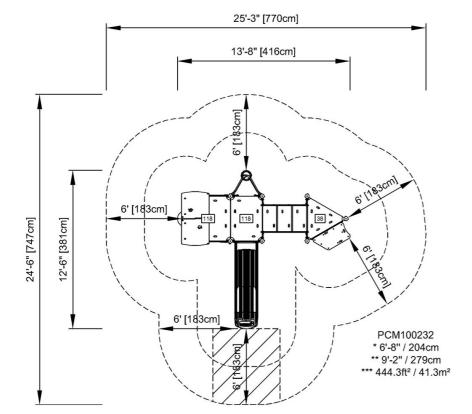

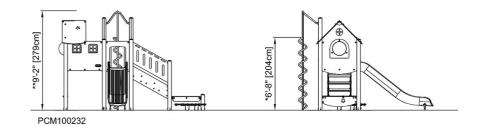

Click to see TOP VIEW

