

CRP800501



Item no. CRP800501-0904				
General Product Information				
Dimensions LxWxH	617x108x310 cm			
Age group	5+			
Play capacity (users)	12			
Colour options				



The Ocean Arch is an intriguing structure that will attract children to play on it. Due to the varied, bouncing and slanting ropes and hammocks, children will stay for a long time, trying it all out. The transparency of the multiple levels supports social interaction throughout the structure. The membrane and net hammocks offer destination meeting points for smaller or bigger groups of children. The swaying adds to the training of balance and spatial awareness which are fundamental for judging distances, e.g. in the street. Climbing the Ocean Arch helps with the development of cross-coordination skills, which help with the development of your left and right brain half. The many tactile details and varied materials are excellent areas for sensory play. The Ocean Arch ticks all the play value boxes.



1 / 10/07/2024



CRP800501





Horizontal membrane Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. Social-Emotional: great point for a break or meeting with friends.





## Coconut rope

Physical: balance and coordination is supported when walking the swaying rope. A good sense of balance transfers to other skills such as sitting still on a chair. Social-Emotional: children swaying together on the rope experience their own and others' movements. This spurs cooperation and consideration, e.g. when passing others on the rope.



Ropes with UFOs Physical: the UFO's allow for both seated and standing swaying, climbing and turning to develop strength. The sense of balance is developed when swaying.



Rope path w. rubber/aluminium grips Physical: the bounciness and sturdy rubber and aluminum points of the rope develops both the sense of balance and spatial awareness. Social-Emotional: the swaying movement make children consider one another and support them in developing cooperation and turn-taking.


## KOMPAN Let's play

## **Explorer Arch**


CRP800501



The chain/ropes are attached to the Coconut rope by KOMPAN's swivel bushings which are made of stainless steel with bronze bearings. The swivels have an outer cover which is manufactured from black PUR. The usage of side mounted swivels provides frictionless movement, eliminates fingers and feet entrapments and enlarges the standing surface on top of the rope.




Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 8 mm.



Play activities like UFOs are made of injection moulded high-quality PA6. PA6 has good wearing and impact strength.

Item no. CRP800501-0904				
Installation Information				
Max. fall height	2	25 cm		
Safety surfacing area	3	7.4 m²		
Total installation time		12.4		
Excavation volume	4	.05 m³		
Concrete volume	2	.30 m³		
Footing depth (standard)		90 cm		
Shipment weight	4	195 kg		
Anchoring options	In-ground	~		

Warranty Information				
Corocord (Hercules) Rope	10 years			
Galvanised Steel	Lifetime			
Membrane	2 years			
Spare Parts Guarantee	10 years			



The bent arches are holding the tensioned net structure without additional disturbing fasteners. Therefore, the arches are produced from high degree stainless steel to allow movement of the net on the surface of the steel arches. The surface is then treated to create a shiny finish.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.




Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.



## **Sustainability Data**

CRP800501

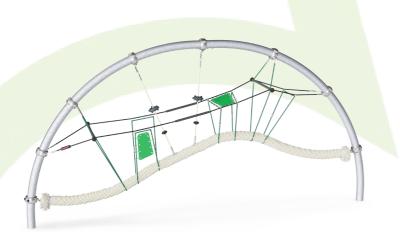

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
CRP800501-0904	1,307.53	3.67	45.49

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

maiz

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023




By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000




CRP800501

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

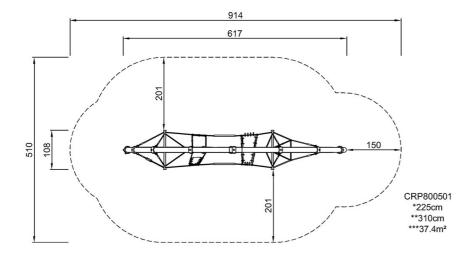

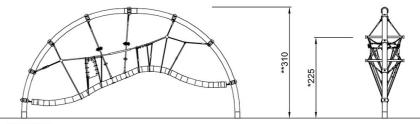

CRP800501

Click to see TOP VIEW

Click to see SIDE VIEW

KOM

Let's play