

# No Return Trail

CRP200401

Item no. CRP200401-0901

## General Product Information

Dimensions LxWxH	754x610x341 cm
Age group	2+
Play capacity (users)	23
Color options	



The cute play panels and talk tubes and the versatile climbing offerings attract children to come back to the No Return Trail again and again. The play panels' varied activities support social play and cause-and-effect understanding. The Hurdle Bridge is a fun challenge to climb over and under, and the varied climb challenges the child's cross-

coordination and spatial awareness. These motor skills are fundamental in understanding space, shapes and measures, the basics in understanding mathematics. The spider net allows for all to play thanks to the varied entrance points. The cascading bridge gently bounces back the children's movements, training their senses of balance and space. The

various trail activities train children's muscles, balance and coordination, which are fundamental for moving confidently in the world. Negotiating turn-taking when playing with other children on the trail supports social-emotional skills and the ability to make friends.



# No Return Trail


CRP200401



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

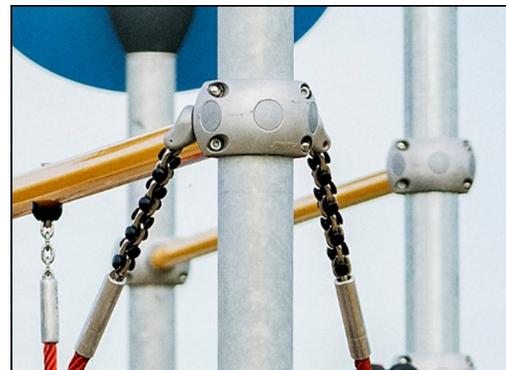

Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

Item no. CRP200401-0901	
Installation Information	
Max. fall height	78 cm
Safety surfacing area	58.5 m <sup>2</sup>
Total installation time	22.0
Excavation volume	6.38 m <sup>3</sup>
Concrete volume	3.30 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	754 kg
Anchoring options	



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Grey round post decks are supported by hot dipped galvanized steel and made of molded 75% post-consumer PP material with a non-skid pattern and texture surface.

**EN  
1176**  
compliant

# Sustainability Data

CRP200401



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>CRP200401-0901</b>	1,645.60	3.09	55.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# No Return Trail

CRP200401

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

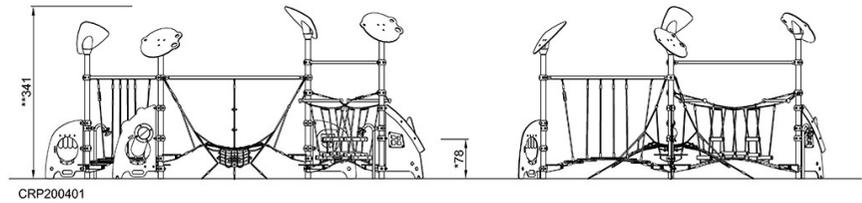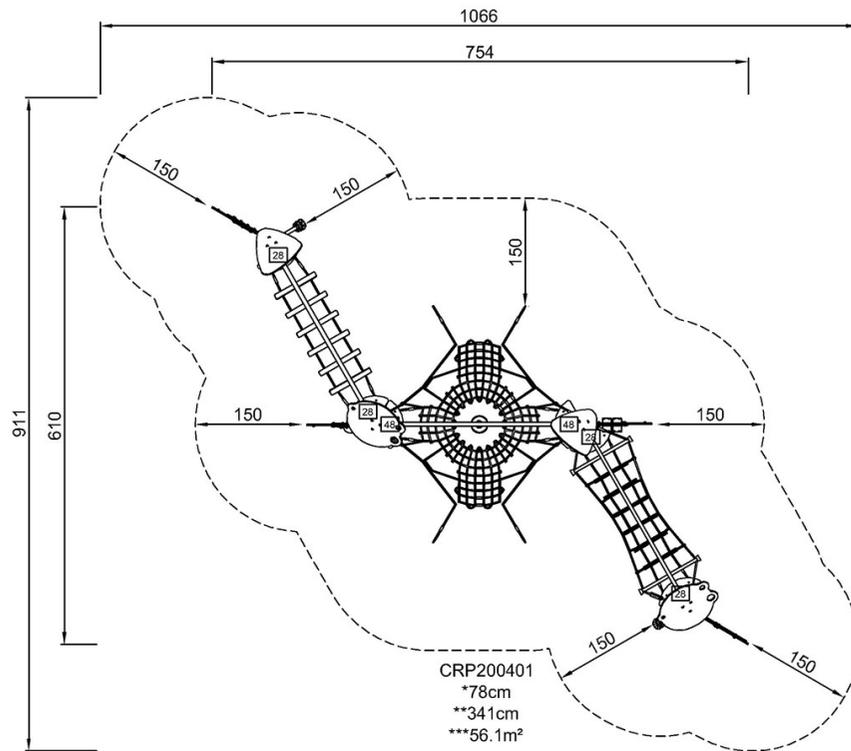

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)