
Swing H:2.0m, Std. Seats, Anti-wrap

KSW90012



Ect 3 bidy		
Item no. KSW90012-0909		
General Product Information		
Dimensions LxWxH	333x200x224 cm	
Age group	2+	
Play capacity (users)	2	
Colour options		

KO







KOMPAN swings can be configured to adapt individual needs & demands. All A-Frame swings are available in 2m and 2.5m height with posts of impregnated pine wood, hardwood or hot dip galvanized steel. As seats we offer standard swing seat, cradle seat, toddler seat or bird nests with a diameter of ø100cm or 120cm. Further the seats are available with either hot dip galvanized chains or stainless steel chains and if preferred with antiwrap suspensions. The modular swing system also enable multibay configurations with 2,3,4 or more sections.

Swing H:2.0m, Std. Seats, Anti-wrap



KSW90012



Two single swing seats

Physical: trains balance, coordination and spatial awareness. All necessary when judging distances. Trains arm, leg and core muscles, and strengthens bone density when jumping off. Social-Emotional: parallel play invites cooperation and consideration. Cognitive: cause and effect and thinking skills for younger children. Rules games for bigger children, when swinging in same or different rhythm.



Swing H:2.0m, Std. Seats, Anti-wrap



KSW90012



The A-Frame is designed with hot dip galvanised ø100mm crossbar with large steel end plates for strong fixation of the two post options: Hot dip galvanised ø70mm steel. Impregnated pine wood with hot dip galvanised steel footings.



The swing hangers are made of high quality UVstabalised nylon (PA6) housing with integrated lifetime sealed ball bearings. The height adjustable chains are fixed by a stainless steel hook with theft proof snake-eye bolt in a turn able anti twist housing. All seats with two chain fixation are available with either standard or anti-wrap suspension.



The post of the A-Frame swings are available for surface anchoring with expansion bolts or inground in 60cm or 90cm depth. The hot dip galvanised steel legs are anchored directly in the ground. Pine wood posts are elevated from ground by a unique profiled hot dip galvanised steel footing.

Item no. KSW90012	2-0909		
Installation Information			
Max. fall height	12	20 cm	
Safety surfacing area	20).8 m²	
Total installation time		3.7	
Excavation volume	1.	38 m³	
Concrete volume	0.	00 m³	
Footing depth (standard)	ę	90 cm	
Shipment weight	1	34 kg	
Anchoring options	In-ground	•	

Warranty Information			
Chains	10 years		
Hot dip galvanised steel	Lifetime		
Spare parts guaranteed	10 years		
Swing hangers	5 years		
Swing seat	10 years		



The standard seats of KOMPAN swings is engineered for maximum safety and durability. The two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot dip galvanised steel or stainless steel for all swings heights.



Unique designed seats for toddles: Baby seat of rubber. Toddler seat of PUR with four chain suspension for easy movement. Cradle seat. You & Me swing seat for adult/child or children of different ages to swing together while facing each other.



Sustainability Data

Cradle to Gate A1-A3

KSW90012-0909

KSW90012



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

maiz

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

389.34

CO2e/kg

kg CO₂e/kg

3.07

Recycled

materials


%

45.37



KSW90012


* Max fall height | ** Total height | *** Safety surfacing area

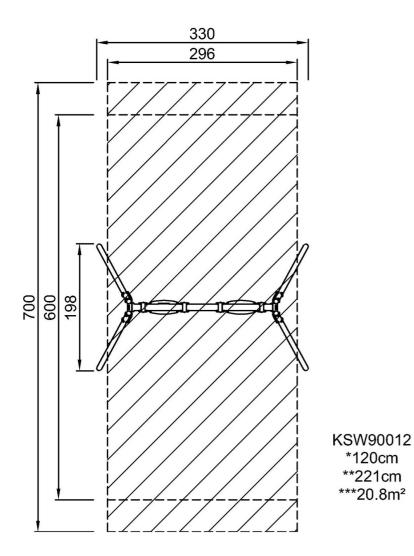

* Max fall height | ** Total height

KON

Let's play

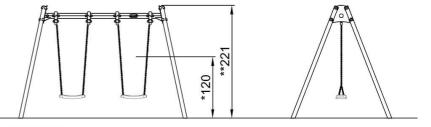

KSW90012

Click to see TOP VIEW