
Parallel Bars

FSW201







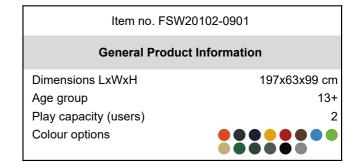





With rounded corners making it easy to swing your legs and try new tricks without the risk of injuries, a Parallel Bar can be found on every street workout area to train the upper body and core stability. The Parallel Bar fits in any Obstacle Course and is a street workout that is physically active and symbolises the freedom of movement while encouraging socialising and combining athletics, calisthenics, and other sports.

Parallel Bars

FSW201





The post is made of Ø101.6 x 2mm, pregalvanised carbon steel and powder coated which is a great protection solution for all climate conditions.



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



Bars intended as grips during exercises are made of hot-dip galvanised steel ø38mm. A great diameter to support the wrist when doing dips or handstands.

Installation InformationMax. fall height99 cmSafety surfacing area15.9 m²Total installation time2.6 hoursExcavation volume0.11 m³Concrete volume0.06 m³Footing depth (standard)90 cmShipment weight75 kgAnchoring optionsIn-ground Connectors10 yearsGalvanised SteelLifetimePost10 yearsSpare Parts Guarantee10 years	Item no. FSW20102-0901			
Safety surfacing area15.9 m²Total installation time2.6 hoursExcavation volume0.11 m³Concrete volume0.06 m³Footing depth (standard)90 cmShipment weight75 kgAnchoring optionsIn-ground Surface<	Installation Information			
Total installation time2.6 hoursExcavation volume0.11 m³Concrete volume0.06 m³Footing depth (standard)90 cmShipment weight75 kgAnchoring optionsIn-groundVarranty InformationConnectors10 yearsGalvanised SteelLifetimePost10 years	Max. fall height	99 cm		
Excavation volume0.11 m³Concrete volume0.06 m³Footing depth (standard)90 cmShipment weight75 kgAnchoring optionsIn-ground SurfaceWarranty InformationConnectors10 yearsGalvanised SteelLifetimePost10 years	Safety surfacing area	15.9 m²		
Concrete volume0.06 m³Footing depth (standard)90 cmShipment weight75 kgAnchoring optionsIn-ground SurfaceWarranty InformationConnectorsGalvanised SteelLifetimePost10 years	Total installation time	2.6 hours		
Footing depth (standard)90 cmShipment weight75 kgAnchoring optionsIn-groundAnchoring optionsSurfaceWarranty InformationConnectorsGalvanised SteelLifetimePost10 years	Excavation volume	0.11 m³		
Shipment weight75 kgAnchoring optionsIn-groundVarranty InformationWarranty InformationConnectors10 yearsGalvanised SteelLifetimePost10 years	Concrete volume	0.06 m³		
Anchoring optionsIn-ground SurfaceWarranty InformationConnectors10 yearsGalvanised SteelLifetimePost10 years	Footing depth (standard)	90 cm		
SurfaceWarranty InformationConnectors10 yearsGalvanised SteelLifetimePost10 years	Shipment weight	75 kg		
Warranty InformationConnectors10 yearsGalvanised SteelLifetimePost10 years	Anchoring options	In-ground	~	
Connectors10 yearsGalvanised SteelLifetimePost10 years		Surface	~	
Galvanised SteelLifetimePost10 years	Warranty Information			
Post 10 years	Connectors	10 years		
	Galvanised Steel	Lifetime		
Spare Parts Guarantee 10 years	Post	10 years		
	Spare Parts Guarantee	10 years		



All of KOMPAN's fitness products are compliant with AS 4685:2021, ASTM F3101 & EN16630 Outdoor Fitness Standards. Load tests are performed to the specified load of 78kg per user. A product intended for one user is loaded with 420kg.

The information sign is made of a PA6 (Polyamide) and shows the most relevant exercises. When users scan the QR code, this will link them to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN Fitness App, which is programmed with many more exercise alternatives.



KOMPAN fitness products are available in Orange, RAL2010 and Grey, RAL7012 as standard. All other RAL colours are available on upon request to meet your project's vision and to match the natural surroundings.



Sustainability Data

Cradle to Gate A1-A3


FSW20102-0901

FSW201



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

112.49

CO2e/kg

kg CO₂e/kg

2.05

Recycled

materials

%


65.60


Parallel Bars

FSW201

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

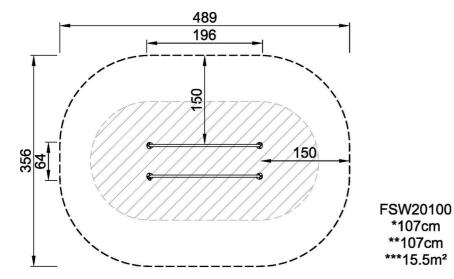



FSW20100

Click to see TOP VIEW



