## **Ocean & Jungle with ADA Stairs**

MSC6408



Item no. MSC640801-3717P				
General Product Information				
Dimensions LxWxH	508x432x286 cm			
Age group	2+			
Play capacity (users)	22			
Color options				



WOW! The Ocean & Jungle hugely appeal to all children's urge for dramatic play inspiration. The low, wide stairway invites all abilities. The many under deck openings to the den invite breaks with friends. There is a Ocean side and a Jungle side, both popular in play. Thanks to rich variation in accesses: curved, inclined and via holes in panels, the Ocean & Jungle appeals to a wide user group. The curved climbing wall, the crawl-through holes, and the accessible stairway train motor skills such as cross-coordination, which supports crossmodal perception, important for reading skills. It builds body confidence, and makes children more secure in moving through the world. The Ocean & Jungle can be played on all sides. From the upper level tactile details encourage communication. Children will play, making friends for life.



## **Ocean & Jungle with ADA Stairs**



MSC6408







Curved climbing wall is made of Ekogrip® panel that consist of a 15mm thick PE base with 3 mm top-layer of soft rubber with a non-skid effect.

Item no. MSC640801-3717P				
Installation Information				
Max. fall height	22	6 cm		
Safety surfacing area	40.	8 m²		
Total installation time		24.8		
Excavation volume	0.9	1 m³		
Concrete volume	0.0	0 m³		
Footing depth (standard)	9	0 cm		
Shipment weight	80	)3 kg		
Anchoring options	In-ground	~		
	Surface	•		

Panels of 19mm EcoCore<sup>™</sup>. EcoCore<sup>™</sup> is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

All floors are made of High Pressure Laminate HPL with a thickness 17.8mm and non skid surface texture according to EN 438-6. KOMPAN HPL has high wearing strength to ensure long lifetime in all climates.



The slide is made of moulded PE. PE has high impact resistance across a wide temperature span which ensures vandal resistance in all locations.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance. The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.



## **Sustainability Data**

MSC6408



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
MSC640801-3717P	1,395.10	2.15	54.80

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO<sub>2</sub> calculation of: Themed play systems



Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Themed play systems" represented by item no.: MSC641100-3717P.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

sund

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023




**By Bureau Veritas HSE** 

www.bureauveritas.dk

+45 7731 1000





MSC6408





\* Max fall height | \*\* Total height

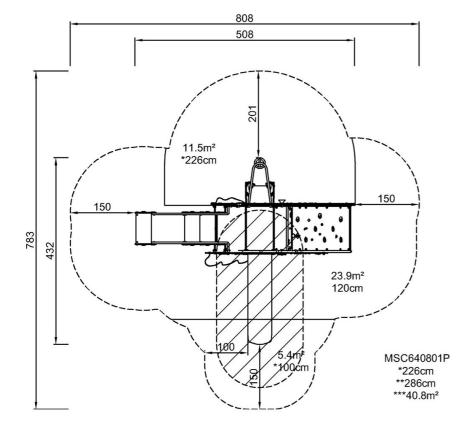



MSC640801

Click to see TOP VIEW

Click to see SIDE VIEW

4 / 04/22/2024