Arm Bike Pro

FAZ51100



Item no. FAZ51100-0801		
General Product Information		
Dimensions LxWxH	93x54x120 cm	
Age group	13+	
Play capacity (users)	1	
Color options		





Ġ

DIREFIC



KOMPAN has created adjustable, interactive Cardio equipment which is at the same quality, equally effective as what you expect from equipment from an indoor fitness center. The Arm bike is truly inclusive and can be used seated in your wheelchair giving a great workout for the upper body. When the exercise is done from a standing position it is a full body workout, engaging all big muscle groups. The patented, self-powered resistance units creates a real road cycle experience. The resistance can adapt automatically, depending on the pedaling speed, or the users can choose to manually change the resistance on the KOMPAN App.

Data is subject to change without prior notice.

Arm Bike Pro

FAZ51100







The seat is made of a Polyurethane Rubber and has a steel insert plate which connects it to the steel frame. The seat is positioned under a 12 degree angle, accommodating seating heights from 550-620mm. The cover is made of one the hardest materials in the market, a Lexan Copolymer EXL9330 and has a thickness of 4mm. This cover can withstand any impact and will protect the electronics in the best possible way. The Q-factor of the arm bike is 175mm, the crank is made of 18 mm stainless steel and connects the pedal arms which are casted stainless steel (grade 304) parts. The length of the pedal arms is 170mm and the pedals are connected with standard bike fittings.

Installation Information			
Max. fall height	6	2 cm	
Safety surfacing area	11.3 m²		
Total installation time	2.2 hours		
Excavation volume	0.34 m³		
Concrete volume	0.21 m³		
Footing depth (standard)	80 cm		
Shipment weight	117 kg		
Anchoring options	In-ground 🗸		
	Surface	~	
Warranty Information			
Electronics	2 years		
Frame	10 years		
Handle	10 years		

10 years

10 years

KO

Item no. FAZ51100-0801



The Innovative self-powered electrical motor and gear providing a virtual flywheel to give real road experience. The resistance works as and automatic drive and adapts automatically to the pedaling speed. The users can overwrite the automatic drive manually by changing the resistance in steps (26 - Watts) through the App.



The ergonomically shaped handles accommodate 3 exercising positions standing, seated in a wheelchair or seated on the seat. The handles have a diameter of ø36mm and are placed under a 30 degree angle. The top coat is a textured black powder coating which gives good protection, grip and insulation.





You can connect the cardio machine to your phone or tablet via Bluetooth. This will provide instant feedback on speed, distance, cadence, watts, calories burned and time. You can also use your smart devices to manually adjust resistance (10 levels), have access to instructional and motivational videos, store and share activity data online!



Saddle

Spare parts guaranteed

Sustainability Data

Cradle to Gate A1-A3


FAZ51100-0801

FAZ51100



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

244.09

CO2e/kg

kg CO₂e/kg

3.75

Recycled

materials

%


37.24




FAZ51100

* Max fall height | ** Total height | *** Safety surfacing area

KOMPAN Let's play

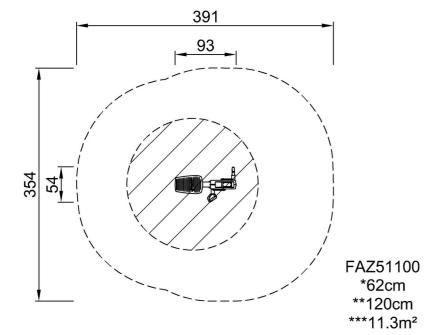



* Max fall height | ** Total height

FAZ51100

Click to see TOP VIEW

Click to see SIDE VIEW

4 / 05/22/2025