
3-Seater Carousel

PCM155



Item no. PCM155-0901			
General Product Information			
Dimensions LxWxH	229x263x236 cm		
Age group	2 - 5		
Play capacity (users)	3		
Colour options			

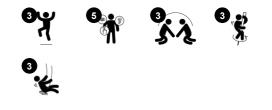

The 3-Seater Carousel adds spinning to swinging, making for a thrilling swing experience that attract children repeatedly. The soft rubber seats invite both lying and seated positions. This allows for beginners as well as elevated level players. Apart from being irresistibly funny, the spinning and swinging movements train the sense of balance and space. These are crucial motor skills, important for all other physical skills, and eventually for concentration skills for learning. To toddlers, swinging trains their sense of space as well as their focal tracking. The seated position in swinging trains the core muscles. When children jump off it builds their bone density. Socially, the three similar seats encourage parallel play for toddlers, and cooperation for preschoolers, both important social skills.



Data is subject to change without prior notice.



PCM155



Rotation

Physical: pushing or pulling it into motion, children use their muscle strength and strengthen their cardio. The rotation develops the sense of balance and space when enjoying the ride. Social-Emotional: listening and negotiating how slow or fast to go, children develop their empathy and cooperation skills.





Triple seating Social-Emotional: stimulates parallel play and cooperation, important for social skills.





Low, rubber swing seat

Physical: support for pushing with feet, developing leg muscles and sense of balance, coordination, as well as spatial awareness. Social-Emotional: self-confidence is fostered from being able to do it yourself. Cognitive: understanding of cause and effect.

3-Seater Carousel



PCM155



The carousel has different anchoring options for both surface and in-ground installation. All footings are hot dip galvanised inside and outside to ensure long lifetime of the product.



The seat hangers are made of high quality UVstabalised nylon (PA6) housing with integrated lifetime sealed ball bearings. The chains are fixed by a stainless steel hook with theft proof snake-eye bolt in a turn able anti twist housing.



Center post is hot-dip galvanised in dimension \emptyset 159 x 4 mm. Horizontal beams are hot-dip galvanised and powder coated in dimension \emptyset 76,1 x 3,6 mm.


Item no.	PCM155-0901
	1 0111100 0001

Installation Information

Max. fall height	15	0 cm	
Safety surfacing area	73.9 m²		
Total installation time	n time 3.8		
Excavation volume	0.5	0 m³	
Concrete volume	0.2	9 m³	
Footing depth (standard)	10	0 cm	
Shipment weight	23	1 kg	
Anchoring options	In-ground	~	
	Surface	~	

Warranty Information

Chains	10 years
Hot dip galvanised steel	Lifetime
Spare parts guaranteed	10 years
Swing hangers	5 years
Swing seat	10 years

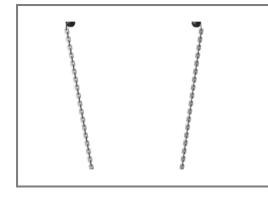

Chains are stainless steel and meet the requirements in ISO1434 -ISO1435 and DIN766.



The baby/toddler seat and suspension hinges are made of soft rubber (TPV). Polypropylene (PP) inside baby basket provides low friction leg openings for easy access (toddler in/out).



Belt seat is made of PUR. All components retain their properties in the temperature range of -30°C to 60°C. All materials are stabilised to a maximum without use of heavy metal stabilities.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



Sustainability Data

Cradle to Gate A1-A3

PCM155-0901

PCM155



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000

BUREAU VERITAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

439.82

CO2e/kg

kg CO₂e/kg

3.19

Recycled

materials

%

44.87




PCM155





* Max fall height | ** Total height

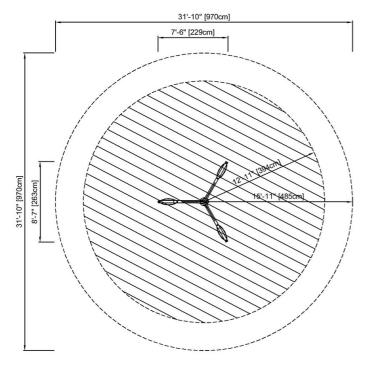

PCM155

PCM155 * 4'-11" / 150cm ** 7'-9" / 236cm *** 795.5ft² / 73.9m²

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 01/31/2025