



Hamadryad Trail

CRP252101

Item no. CRP252101-0902

General Product Information

Dimensions LxWxH	1916x1369x287 cm
Age group	6+
Play capacity (users)	90
Color options	

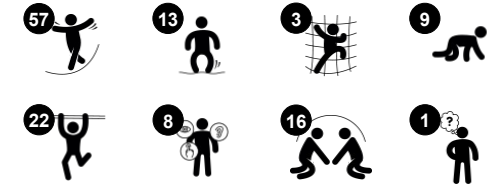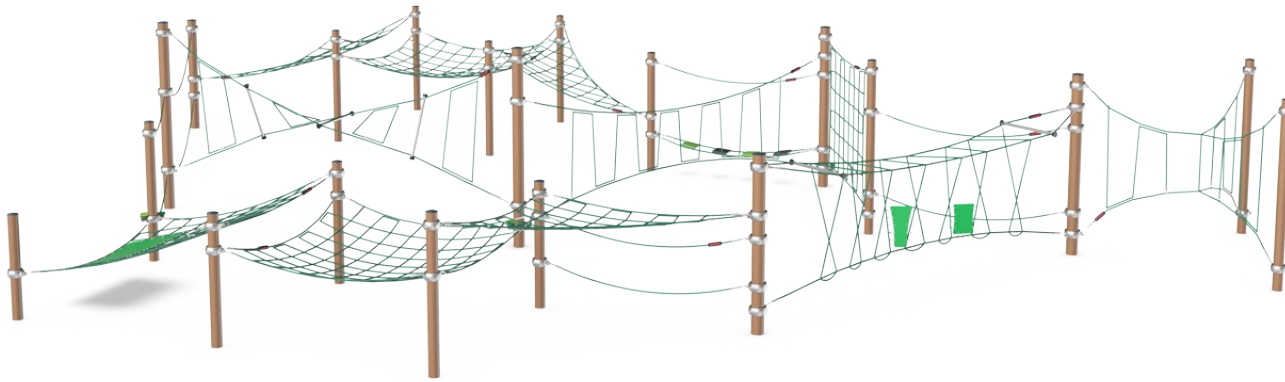

WOW! The Hamadryad Trail attracts children instantly with its looping, varied range of thrilling, responsive challenges. The trail attracts children of all ages to play, again and again. The transparent design makes it possible to watch each other through the structure and get inspired for new tricks and movements. The nets act as a big trim trail and

encourage games such as "the ground is made of lava". The responsive swaying and bouncing activities call for concentrated movement, adjusting for different rhythms of climbing. Navigating through the structure intensely trains agility, balance and coordination, the ABC of motor skills, in a fun way. These motor skills are fundamental for body confidence and

ultimately for the ability to concentrate and sitting still. The horizontal nets and membranes invite socializing and being active together. This is the favourite way of older children to connect, communicate and cooperate, and make friendships for life.

Hamadryad Trail

CRP252101



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

Item no. CRP252101-0902

Installation Information


Max. fall height	270 cm
Safety surfacing area	239.9 m ²
Total installation time	44.0
Excavation volume	40.30 m ³
Concrete volume	22.39 m ³
Footing depth (standard)	90 cm
Shipment weight	2,378 kg
Anchoring options	Surface ✓ In-ground ✓



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

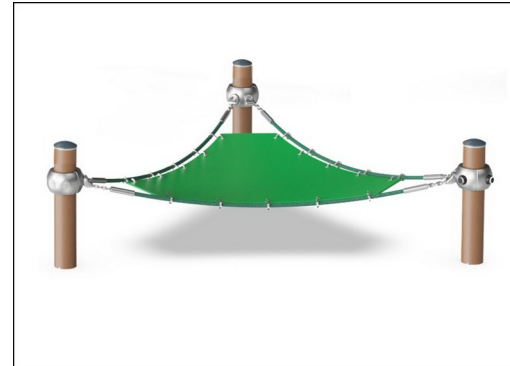


Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



Sustainability Data

CRP252101

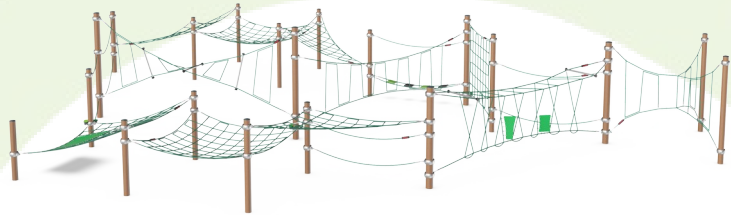

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
CRP252101-0902	5,483.20	3.55	44.50

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000




Hamadryad Trail


CRP252101

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

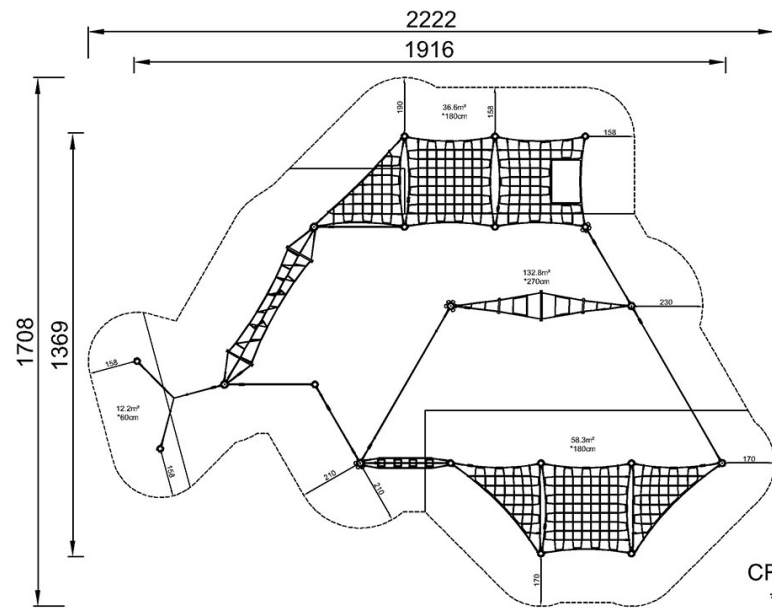

CRP252101
*270cm
**287cm
***239.9m²



CRP252101

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)