CRP800501





Item no. CRP800501-0904

General Product Information

Dimensions LxWxH 20'3"x3'7"x10'2"

Age group 5 - 12

Play capacity (users) 12



Color options

The Ocean Arch is an intriguing structure that will attract children to play on it. Due to the varied, bouncing, and slanting ropes and hammocks, children will stay for a long time, trying it all out. The transparency of the multiple levels supports social interaction throughout the structure. The membrane and net hammocks offer destination meeting points for

smaller or bigger groups of children. The swaying adds to the training of balance and spatial awareness, which are fundamental for judging distances, e.g., in the street.

Climbing the Ocean Arch helps with the development of cross-coordination skills, which help with the development of your left and right

brain half. The many tactile details and varied materials are excellent areas for sensory play. The Ocean Arch ticks all the play value boxes.




CRP800501






#### Horizontal membrane

Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. Social-Emotional: great point for a break or meeting with friends.

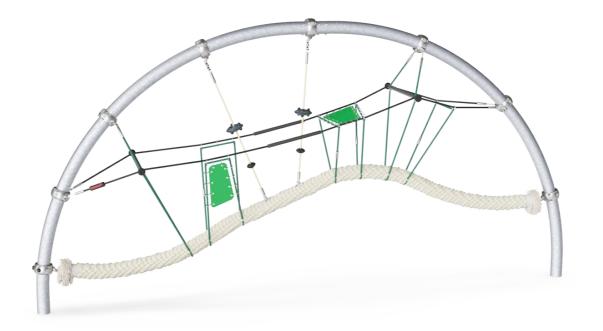








### Ropes with UFOs

Physical: the UFOs allow for both seated and standing swaying, climbing and turning. The sense of balance is developed when swaying. Climbing up strengthens arm and leg muscles.



#### Rope path with rubber and alu grips

Physical: the bounciness and sturdy rubber and aluminum points of the rope develops both the sense of balance and spatial awareness. These motor skills are fundamental for judging distances. Social-Emotional: the swaying movement makes children consider one another and support them in developing cooperation and turntaking.




CRP800501






The chain/ropes are attached to the Coconut rope by KOMPAN swivel bushings made of stainless steel with bronze bearings. The swivels have an outside cover of black PUR. The usage of side mounted swivels provides frictionless movement, eliminates fingers and feet entrapments and enlarges the standing surface on top of the rope.




Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 8mm.



Play activities like UFOs are made of injection moulded high quality PA6. PA6 has good wearing and impact strength.

Item no. CRP80050	1-0904					
Installation Information						
Max. fall height		7'5"				
Safety surfacing area		415ft²				
Total installation time		12.4				
Excavation volume	Ę	5.3yd³				
Concrete volume	3.	01yd³				
Footing depth (standard)		2'11"				
Shipment weight	12	07lbs				
Anchoring options	In-ground	~				

Warranty Information	
Corocord Rope	10 Years
Hot dip galvanized steel	Lifetime
Membrane	2 Years
Spare Parts Availability	10 Years



The bended arches are holding the tensioned net structure without additional disturbing fasteners. The arches are produced from high quality stainless steel to allow movement of the net on the surface of the steel arches. The surface is treated to make it shiny.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.




The Corocord Smart Clamps are carefully designed to ensure superior flexibility in high-quality aluminum material. The smart clamps are attached around the post with four steel bolts. Unused attachment points are closed with PA caps.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1

ASTM F1487 compliant **Sustainability Data** 

CRP800501

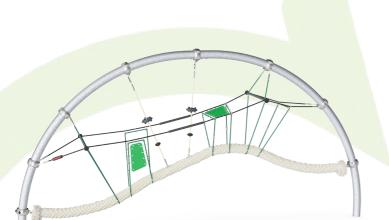

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
CRP800501-0904	1,175.55	3.86	44.73

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))




#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

made

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


CRP800501



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

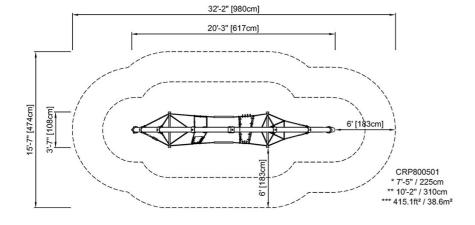

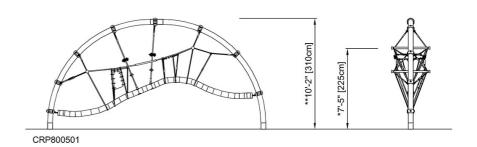

Click to see SIDE VIEW