
COR20502




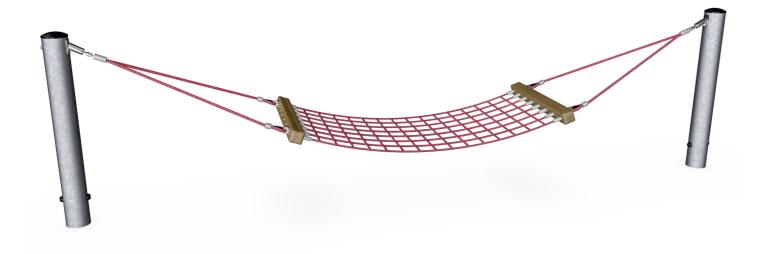

Item no. COR205021-1101

General Product Information

Dimensions LxWxH 534x100x140 cm
Age group 2 - 12
Play capacity (users) 4
Colour options



Children can sway mildly or wildly, lie, be seated or even stand in the Rope Hammock. Children of all abilities will take joy in the responsiveness and social interaction in the hammock. Pushing and pulling the friends from side to side is fun and also builds arm strength. The swaying motion supports important motor skills such as the sense of balance and the


sense of space. The rhythmic movements support the understanding of rhythm. In combination, these three skills assist the child's ability to navigate space securely, for instance when judging distances and speed in traffic. The sense of balance is fundamental for all other motor skills and helps the child's motor stability: preventing falls and being able to sit

still for longer periods of time.



COR20502



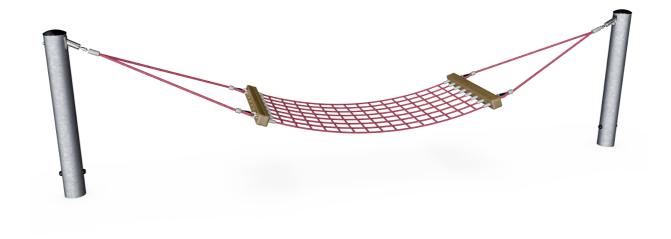



Hammock bed

Physical: swaying back and forth trains the sense of balance and spatial awareness, both important for judging distances and navigating space confidently. Social-Emotional: swaying, sharing and meeting with groups of friends. Turn-taking skills, when deciding who is pushing and who is swaying.




Double ropes

Physical: pushing and pulling others. Holding the ropes support arm muscles. Can be pushed from a wheelchair position.

COR20502





The nets for the hammocks are produced from 16 mm Corocord ropes. The connection between the ropes are manually spliced to avoid any hard objects in the lying area. The size of the meshsize does not allows to pass through the net.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.



The steel structure are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

	Item no. COR20502	21-1101			
Installation Information					
	Max. fall height	1;	30 cm		
	Safety surfacing area	34	1.6 m²		
	Total installation time		4.4		
	Excavation volume	2.	20 m³		
	Concrete volume	1.	40 m³		
	Footing depth (standard)	1	10 cm		
	Shipment weight	1	64 kg		
	Anchoring options	In-ground	•		

Warranty Information

Corocord rope 10 years

Hot dip galvanised steel Lifetime

Spare parts guaranteed 10 years




Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eyecatching signal colours.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1

CSA Z614 compliant

Sustainability Data

COR20502

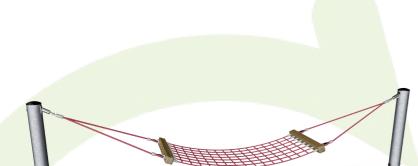

Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR205021-1101	367.70	2.29	35.09

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))




Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





COR20502



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

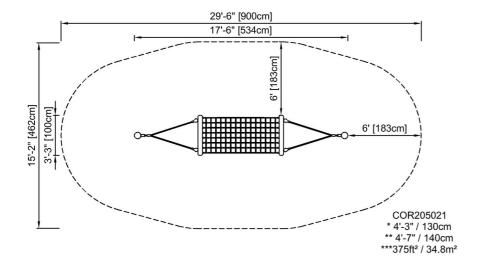

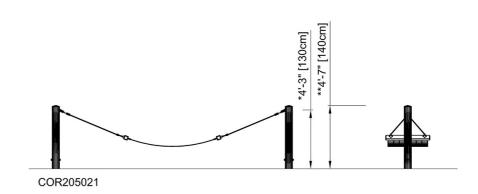

Click to see SIDE VIEW