
Ship, Large

KPL520



Item no. KPL52011-0901			
General Product Information			
Dimensions LxWxH	417x443x362 cm		
Age group	3+		
Play capacity (users)	15		
Colour options			



The KOMPAN Pirate Ship inspires and attracts play again and again. The strong theme inspires dramatic play, and the variation of climbing, gliding and sliding attracts play on end, again and again, year after year. The unit forms a whole playground with its diverse play activities The open space behind the keel features a steering wheel. This spurs dramatic

play conversations, stimulating language and communication skills The cabin under deck has a nice seat for socializing. A climbing wall and access climber lead to the deck. Up here there is another steering wheel, supporting dramatic play and turn-taking skills. From upper deck, the child can slide, or take a whizzing glide down the dare-devil fireman's pole. This trains

*

the understanding of space and helps the child build up and understanding of space and measures.





KPL520





Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.





Climbing wall Physical: develops children's cross coordination, eye-hand coordination, and muscle strength when climbing. Social-Emotional: two-sided climb invites cooperation.



Climbing pole Physical: cross coordination and muscle strength are trained. Social-Emotional: turntaking and cooperation.



Open space in front Social-Emotional: the bench along the keel is a great space for meeting and exchanging.



Turning wheel

Social-Emotional: develops turn-taking, communication and cooperation. Cognitive: the manipulative item stimulates cause and effect understanding, logical thinking and communication. Creative: working with moveable play items that can leave a mark supports the child's creativity.

ی کے ایک

Physical: coordination is supported when

going down, as well as arm and core muscles.

understanding of space, speed and distances

Landing strengthens bone density, which is

built for life in early childhood. Social-

Emotional: turn-taking and risk-taking.

Cognitive: young children develop their

Fireman's pole

when gliding down fast.

Slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.

Ship, Large





10 years



Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.




The main tower posts are available in two types of material: European pine wood posts, pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). Aluminum post t=2mm with anodized surface treatment. Base material EN AW-6060 T66.



Floors and panel activities are available in two types of material: Waterproof plywood decks thickness 21.5mm from pine and alder wood with anti-slip film on both sides. High Pressure Laminate HPL thickness 17.8mm with slip resistant surface texture according to EN 438-6.

Item no. KPL52011-0901					
Installation Information					
Max. fall height	148	3 cm			
Safety surfacing area	36.	8 m²			
Total installation time	19.7 h	ours			
Excavation volume	1.8	8 m³			
Concrete volume	0.8	2 m³			
Footing depth (standard)	90) cm			
Shipment weight	54	7 kg			
Anchoring options	In-ground 🗸				
	Surface	~			
Warranty Information					
Aluminum	15 y	ears			
EcoCore HDPE	Life	time			
Hollow PE parts	10 y	ears			
Pinewood	10 y	ears			

...



Slides are available in three different materials: moulded on piece PE slides made from 33% post-consumer materials, Combined EcoCore[™] sides and stainless steel slide bed t=2mm. Full stainless steel AISI304 t=2mm.



The main posts are equipped with hot dip galvanised steel footings. The steel footings elevates the posts 20mm from ground level to avoid contact with surfacing material.



Spare parts guaranteed

Sustainability Data

KPL520



Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
KPL52011-0901	650.18	1.59	49.99

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





KPL520



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

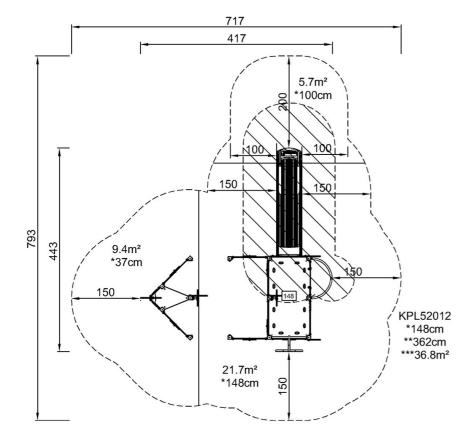

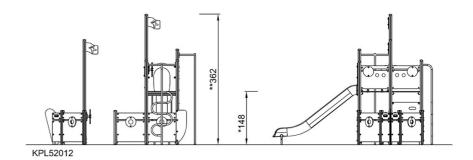

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 06/28/2025