## **Donkey Ride**

NAT101





Item no. NAT101-0412

#### **General Product Information**

Dimensions LxWxH 44x81x67 cm
Age group 2+
Play capacity (users) 1

Color options







The Donkey Ride makes children smile and want to try it, and they will not be disappointed: the Donkey is multifunctional; children can choose between rubber handholds or a handhold bar, depending on which way they turn. Ample foot support is provided in both directions, so two children can easily be seated together, rocking the Donkey Ride from each

direction. Rocking on the Donkey Ride trains important motor skills such as balance and coordination, which are important for movement control. When children stem their feet against the foot support and hold tight to the handholds or bars, they train the main muscle groups. But not least, playing with a friend on the Donkey Ride trains cooperation

and turn-taking skills. These are important socio-emotional skills that help children make friends.





### **Donkey Ride**

NAT101



Surface



Posts and boards are made of pine wood from sustainable European sources. The wood is pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). On request it can be supplied as FSC® Certified (FSC® C004450).



The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

110111110.11111111111111111111111111111				
Installation Information				
Max. fall height		60 cm		
Safety surfacing area	•	7.5 m²		
Total installation time		2.0		
Excavation volume	0	.21 m³		
Concrete volume	0	.00 m³		
Footing depth (standard)		43 cm		
Shipment weight		37 kg		
Anchoring options	In-ground	•		

Item no. NAT101-0412



The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.





# **Sustainability Data**

NAT101





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



#### Verification of CO<sub>2</sub> calculation of: Nature play



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023







Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
NAT101-0412	80.40	2.46	38.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


# **Donkey Ride**


NAT101



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

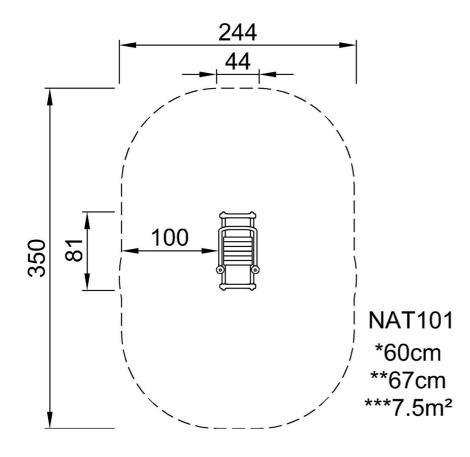



Click to see TOP VIEW

Click to see SIDE VIEW