
NRO852





The Parkour 2 is a challenge that school age children can't pass up. The varied, responsive climbing ropes and nets are too much of a temptation. There are many ways to climb, encouraging imagination, as well as strength and coordination. It is perfect for confidence building, helping your friends, and even 'hanging out' when you reach the top beams. It

is made of natural Robinia timber, which provides an organic structure that can either blend into or stand out from your surrounds. Children can touch and feel the timber while playing, observing how nature inspiration interacts with the built environment

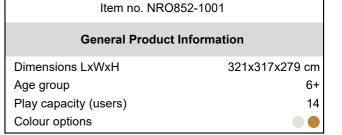





NRO852





Top rope
Physical: the top rope adds support when
balancing on the beam. This develops
dexterity, hand and arm muscles.









Physical: children develop cross-body coordination and muscle strength when climbing. The big mesh supports proprioception and spatial awareness. Social-Emotional: the big meshes allow for more children to sit together and talk.







### Parkour ropes

Physical: the big rubbery discs are great support for the feet when climbing or crossing. This trains cross coordination, balance and arm and leg muscles. This combination adds to the child's body adeptness and awareness, adding security to movements. Social-Emotional: the seats make a nice destination and meeting point and take cooperation when crossing by others on the way through the module.







#### Climbing rope

Physical: the small knots add support for hands and feet when climbing onto the rope. Climbing supports spatial awareness, cross coordination and muscle strength. Social-Emotional: passing others when climbing up or down develops turn-taking skills and consideration.

NRO852



In-ground



All organic Robinia products by KOMPAN are made of Robinia wood which is sourced from sustainable plantation farms. On request it can be supplied as FSC® Certified (FSC® C004450).



Full coloured EPDM rubber seats with a smooth surface. The seats are moulded on a hot-dip galvanised steel inlay that ensures durable fixation to the rope.



Nets and ropes are made of UV-stabilised PA with inner steel cable reinforcement. The rope is induction treated to create a strong connection between steel and rope, which leads to durable weather resistance.

1011110:14110002 1001			
Installation Information			
Max. fall height	267 cm		
Safety surfacing area	35.8 m²		
Total installation time	8.4		
Excavation volume	2.35 m³		
Concrete volume	0.23 m³		
Footing depth (standard)	102 cm		
Shipment weight	400 kg		

Item no. NRO852-1001

# Warranty Information EPDM Components 2 years Robinia Wood 15 years Ropes & Nets 10 years Spare Parts Guarantee 10 years Stainless Steel Lifetime Components





The Robinia wood can be supplied as untreated raw wood or painted with a brown coloured transparent pigment that maintains the golden wood colour of the wood.



Anchoring options

# **Sustainability Data**

NRO852





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
NRO852-1001	234.02	0.73	7.22

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Nature play



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

200m

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





NRO852



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

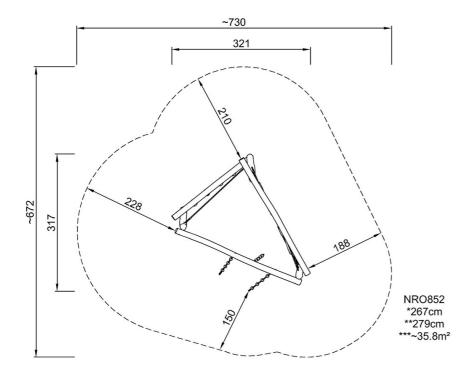

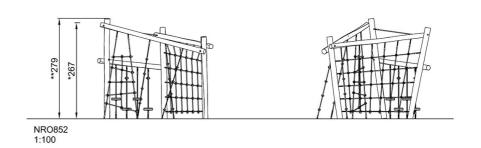

Click to see TOP VIEW

Click to see SIDE VIEW