## **Double Tower with Net**

PCM210421






provides a great open view of the height when the child balances over, training it's perception of distances. The fast slide and even faster fireman's pole are hugely thrilling and train the child's balance and posture in a fun way. The sense of balance is important for the ability to

e.g. sit still and concentrate at school. All in all,

a fun and challenging unit for play and motor

skill development.

| Item no. PCM210421-0905     |                |  |  |
|-----------------------------|----------------|--|--|
| General Product Information |                |  |  |
| Dimensions LxWxH            | 381x535x380 cm |  |  |
| Age group                   | 6+             |  |  |
| Play capacity (users)       | 14             |  |  |
| Color options               |                |  |  |





The impressive amount of play value in the

climbing events adds to the fun: the cross-

traversing the overhead ladder. These help

children to manage the body confidently and safely through the world. The net bridge

Double Tower & net bridge will encourage play again and again. The graded play in diverse


coordination and awareness when climbing, or

### **Double Tower with Net**

PCM210421



Surface



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.




Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.



**Installation Information** 

Item no. PCM210421-0905

Max. fall height 246 cm Safety surfacing area 51.5 m<sup>2</sup> Total installation time 15.4 Excavation volume 0.71 m<sup>3</sup> Concrete volume  $0.08 \text{ m}^3$ Footing depth (standard) 90 cm Shipment weight 565 kg Anchoring options In-ground



The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.



The slides can be chosen in six different colors and three materials: Straight or curved onepiece molded PE slides, made from 33% recycled post-consumer materials in different colours. Combined EcoCore™ sides and stainless-steel. Full stainless steel in one piece design for more vandalism proof solutions.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCoreTM panels of 95% post-consumer recycled waste and molded PP decks.



# **Sustainability Data**

PCM210421





| Cradle to Gate A1-A3 | Total CO₂<br>emission | CO₂e/kg    | Recycled materials |
|----------------------|-----------------------|------------|--------------------|
|                      | kg CO₂e               | kg CO₂e/kg | %                  |
| PCM210421-0951       | 988.20                | 1.99       | 69.10              |
| PCM210421-0905       | 1,233.20              | 3.07       | 50.50              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Play systems



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  ${\rm CO_2}$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000




## **Double Tower with Net**


PCM210421



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

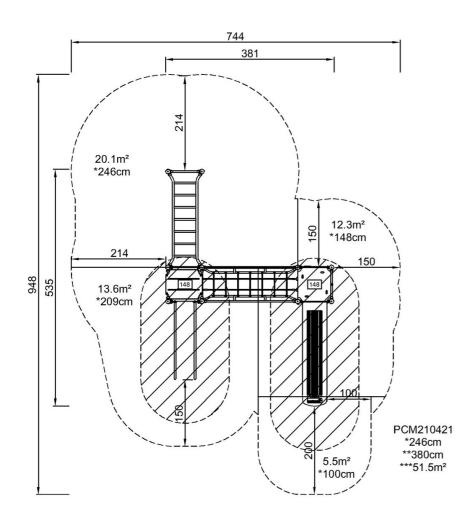

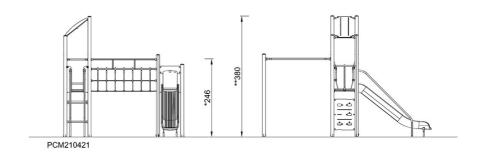

Click to see TOP VIEW

Click to see SIDE VIEW