M173





Item no. M17301-01P

General Product Information

Dimensions LxWxH 36x94x80 cm
Age group 2+
Play capacity (users) 1



Colour options







The Fairy-tale Dog is a hugely inviting springer that attracts and supports children's relentless play again and again. The rocking sensation is a great movement response. Movement response is one of the greatest play sensations there are. Apart from the fun, this adds a feeling of control to the child's play. The responsive movement also trains the

understanding of cause and effect in young children: that their actions have an effect on the world. Rocking the Fairy-tale Dog trains the child's sense of balance and space as well as hand and arm muscles when holding tight and pushing your feet hard into the foot support. All of these basic motor and muscle skills help train the child's bodily cognition, supporting

important life skills such as being able to sit still on a chair or navigate traffic securely.





M173







### Handhold

**Physical:** opens more hold positions and ensures good grip, necessary for rocking intensely which trains hand and arm muscles.









### Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance which are fundamental motor skills.

Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.





### Foot support

Physical: the footrest supports intensive rocking, simulating the senses of balance and space and supports coordination and muscle strength.





### Theme

**Cognitive:** suggests a theme and supports dramatic play, which stimulates language and communication skills.





#### Eye

**Social-Emotional:** the eye evokes emotions of empathy, encouraging children to look the animals in the eye.

M173










Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of a core produced from 100% recycled material.

KOMPAN's springs are manufactured from highquality spring steel. The springs are cleaned by phosphating before being painted with epoxy primer and polyester powder coating. The springs are fixed by unique anti-pinch fittings for maximum safety and longevity. The springs are fixed by unique anti-pinch fittings for maximum safety and longevity.

Item no. M17301-01P						
Installation Information						
	Max. fall height		60 cn	n		
	Safety surfacing area		7.5 m	1 <sup>2</sup>		
	Total installation time		2.0	6		
	Excavation volume		0.19 m	13		
	Concrete volume		0.00 m	1 <sup>3</sup>		
	Footing depth (standard)		45 cn	n		
	Shipment weight		31 k	g		
	Anchoring options	In-groun	d <b>√</b>	•		
		Surface	•	•		
Warranty Information						
	EcoCore HDPE		Lifetime	е		
	Membrane		2 year	s		
	Spare Parts Guarantee	1	l0 year	s		
	Springs		5 year	s		







The seat is made of a moulded PP insert which has a soft outer layer of TPE rubber. TPE rubber has good shock absorption and is a durable solution.



# **Sustainability Data**

M173





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
M17301-01P	70.90	2.53	48.23

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



## Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

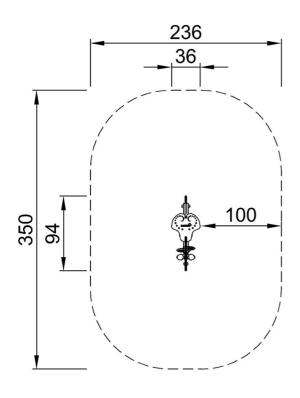

M17301 \*60cm \*\*80cm \*\*\*7.54m²

