Cableway Start Platform

NR0879



Item no. NRO879-0621 General Product Information Dimensions LxWxH 147x355x225 cm Age group 5 - 12 Play capacity (users) -Colour options




Large elevated square start platform with capacity for many waiting users. The long runup ramp ensures easy access up to the start area when returning the seat to the next user. The platform is designed to be used for cableways installed on flat surroundings. For double cableways two start platforms can be placed next to each other.

Cableway Start Platform

NR0879



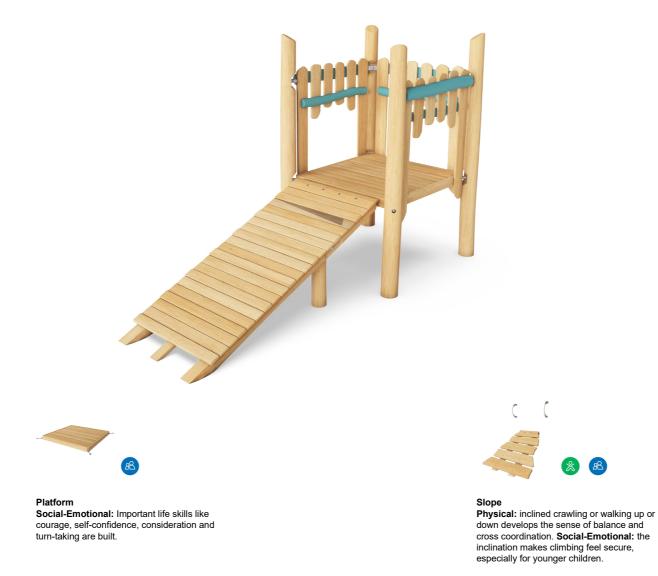


Cableway Start Platform



NR0879



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).

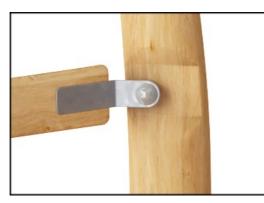

The hardware is made of stainless steel or galvanised steel to ensure durable connections with a high corrosion resistance.

Item no. NRO879-0621				
Installation Information				
Max. fall height		194 cm		
Safety surfacing area		32.3 m²		
Total installation time		10.2		
Excavation volume		1.53 m³		
Concrete volume		0.08 m³		
Footing depth (standard)		60 cm		
Shipment weight		619 kg		
Anchoring options	Surface	~		
	In-groun	nd 🗸		
Warranty Information				
Robinia wood	15 years			
Ropes & nets		10 years		
Spare parts guaranteed		10 years		

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	0	0
Required	0	0	0



Sustainability Data

Cradle to Gate A1-A3

NRO879-0621

NR0879



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NR0409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Simo

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



B U R E A U V E R I TAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

84.24

CO2e/kg

kg CO₂e/kg

0.17

Recycled


materials

%

1.23





NR0879





* Max fall height | ** Total height

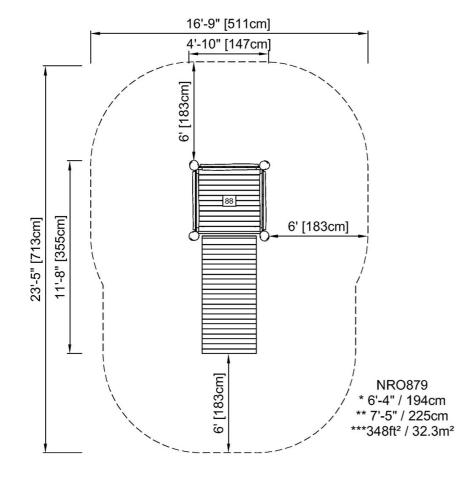

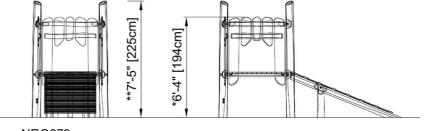

NR0879

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 07/10/2024