
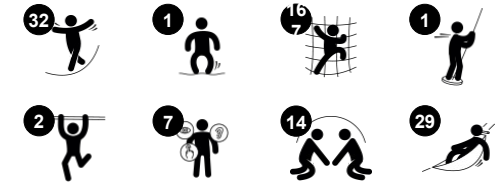


# Boomerang

COR16102



Item no. COR161021-0904	
General Product Information	
Dimensions LxWxH	2166x1421x281 cm
Age group	5+
Play capacity (users)	64
Color options	



The amazing Boomerang has a varied net-  
scape offering a wealth of play opportunities  
that will make older children want to play time  
and time again. The inclusive design and open  
ended activities on ground level invite all users,  
including parents. The spacious upper net dips  
to form valleys with varied climbing challenges  
above and below, all stimulating the cross-

coordination, balance and spatial awareness of  
the child. The Boomerang is thrilling play, and  
benefits the child's ability to navigate spaces  
confidently, for instance, in crowds. The wide,  
sloping membrane adds a fun, bouncy glide  
and climb experience, that trains the sense of  
balance and core muscles. Under the net, a  
forest of swaying ropes add a new balance and

climb experience. This is a fabulous meeting  
and seating place for large groups of children.  
(Design: Annabau)



Data is subject to change without prior notice.

# Boomerang

COR16102



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear- and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The steel surface of these bended steel pipes are wet painted with one basic layer and one top layer of lead free colour material. The paint has excellent corrosion resistance and can be easily maintained.

Item no. COR161021-0904	
Installation Information	
Max. fall height	281 cm
Safety surfacing area	253.8 m <sup>2</sup>
Total installation time	121.6
Excavation volume	23.83 m <sup>3</sup>
Concrete volume	12.91 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	5,495 kg
Anchoring options	



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



Fully coloured EPDM rubber discs with smooth surface. The moulded EPDM surrounds a hot dip galvanised steel core that ensures both the stability of the discs and durable fixation to the rope.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

**EN  
1176**  
compliant

# Sustainability Data

COR16102



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR161021-0904</b>	13,936.10	2.76	47.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# Boomerang

COR16102

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

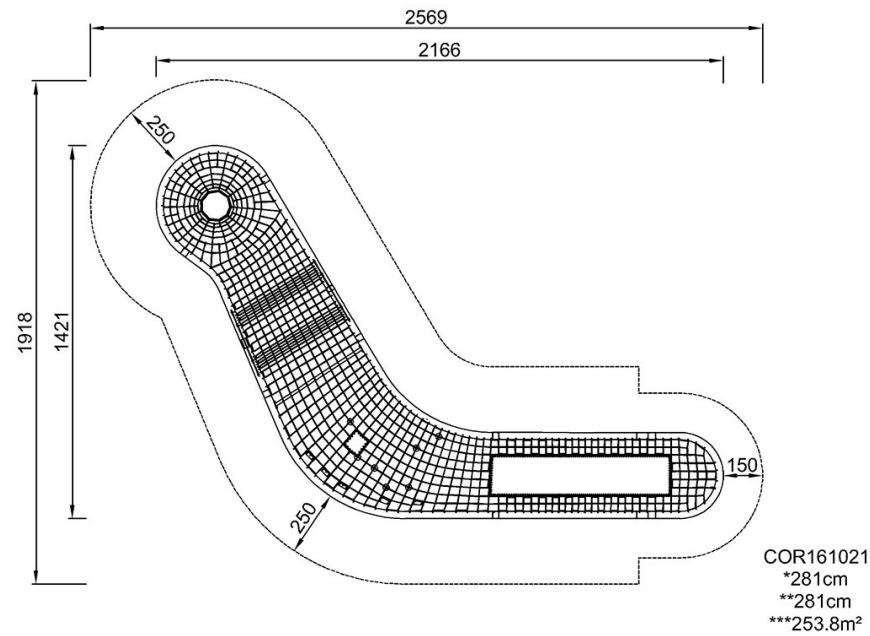

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)