PCM100231




Item no. PCM100231-0902			
General Product Information			
Dimensions LxWxH	434x381x279 cm		
Age group	2 - 5		
Play capacity (users)	14		
Colour options	$\bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet$		



The attractive Play Tower is a magnet for children. It encourages active physical play time and again. The accessible stair-way provides an age-appropriate access to the tower and teaches younger children to climb stairs, alternating feet, an important everyday task. On the elevated level, a nice play house offers a great meeting point. The bubble window distorts the voice back when spoken into – great for sense of wonder. Sliding down is a thrilling play activity, which also trains trunk stability and the sense of balance. The slide is wide enough for sliding down in a lying position too. The curly climber is a wonderful play activity which stimulates the sense of space and the proprioception as children place their

hands correctly for rotating down to the ground. Apart from the fun, this is wonderfully supportive at the same time, for all.







Bubble Window Social-Emotional: invites interaction between outside and inside. Cognitive: distorts the sound of the voice, developing logical thinking.





#### Accessible stairway

Physical: climbing the accessible stainway is for all and supports cross coordination as well as arm and leg muscles. For young children, walking stairs and alternating feet is developed. Social-Emotional: room for active breaks and adult helpers. An inclusive space.

KOMP

Let's play



Desk Social-Emotional: fine meeting place and a space creator. Sharing and cooperation from both sides create a social scenario that supports communication and cooperation.

# Ø 8 0

### Slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly. 

### **Curly climber**

Physical: coordination and proprioception are supported when placing arms and legs correctly for going down. Sense of balance when rotating. Arm muscles for holding tight. Social-Emotional: empathy stimulated by turn-taking. Cognitive: logical thinking when placing arms and legs right for rotating downwards.



PCM100231



Panels of 19mm EcoCore<sup>™</sup>. EcoCore<sup>™</sup> is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.

Item no. PCM100231-0902					
Installation Information					
Max. fall height	:	204 cm			
Safety surfacing area	2	42.0 m²			
Total installation time		17.9			
Excavation volume	(	0.54 m³			
Concrete volume	(	0.00 m³			
Footing depth (standard)		85 cm			
Shipment weight		578 kg			
Anchoring options	In-ground	<b>~</b> k			
	Surface	~			
Warranty Information					
EcoCore HDPE	L	ifetime			
PE slide	1	0 years			
PP Decks	1	0 years			
Spare parts guaranteed	1	0 years			
Stainless steel components	L	ifetime			



The slides can be chosen in different materials and colors: Straight or curved one-piece molded PE slides in yellow or grey color. Combined EcoCore™ sides and stainless-steel. Full stainless steel in one-piece design for more vandalism proof solutions.



The stainless-steel activities are made of highquality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCoreTM panels of 95% post-consumer recycled waste and molded PP decks.

-	Elevated activities <b>3</b>	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
	Present	3	1	1
	Required	2	1	1

CSA Z614 compliant

## **Sustainability Data**

PCM100231




C	Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
		kg CO₂e	kg CO₂e/kg	%
	PCM100231-0951	635.70	1.38	73.74
	PCM100231-0902	720.08	1.75	67.22

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







#### Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant


Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


Publication date: 30. October 2023




By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000

PCM100231



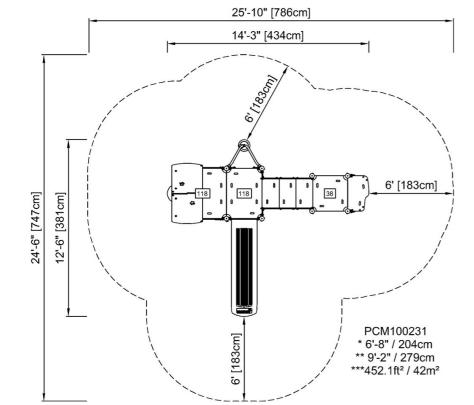

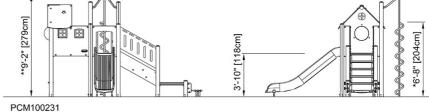

\* Max fall height | \*\* Total height

Click to see TOP VIEW

