
## Hurdles

FPW211





The five hurdles form an obstacle that can be overcome in several ways. If you do not mind getting dirty you can 'belly crawl' underneath them. Otherwise you go over the hurdles by walking or running. A single hurdle can also be used for exercises on the spot such as push ups and high jumps.

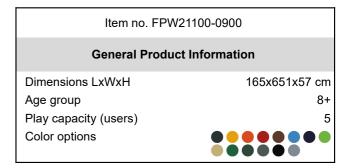



## Hurdles

FPW211





Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



The bars intended for exercises are made of hot-dip galvanised steel ø48mm. The diameter of these bars provide a good support when used to for push ups exercises or when doing exercises standing on the tubes.

Item no. FPW21100-0900			
Installation Information			
Max. fall height	50 cm		
Safety surfacing area	41.1 m²		
Total installation time	4.3		
Excavation volume	0.28 m³		
Concrete volume	0.00 m³		
Footing depth (standard)	90 cm		
Shipment weight	176 kg		
Anchoring options			



# **Sustainability Data**

FPW211





Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
FPW21100-0900	377.90	3.47	48.60

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Fitness



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

made

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  ${\rm CO_2}$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000




FPW211



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

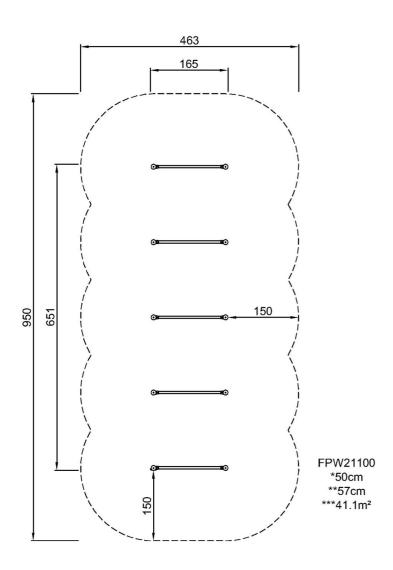



Click to see TOP VIEW

Click to see SIDE VIEW