


Daisy

KPL110

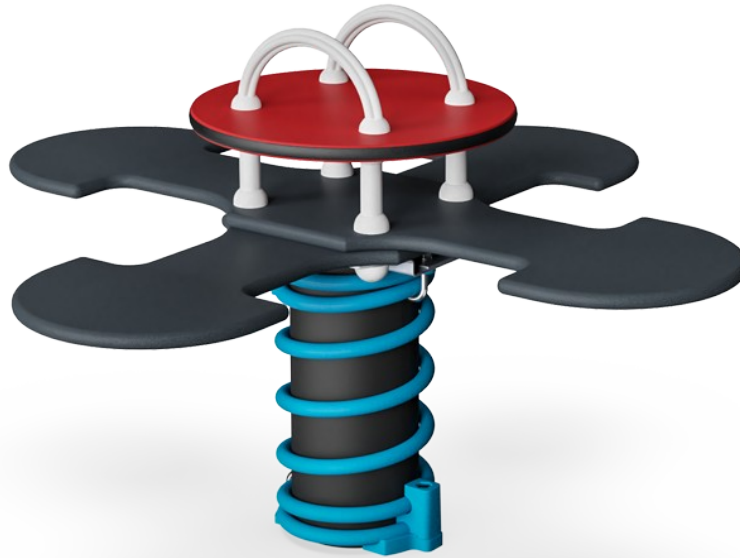

Item no. KPL110-0411

General Product Information


| | |
|-----------------------|---------------|
| Dimensions LxWxH | 100x100x65 cm |
| Age group | 2+ |
| Play capacity (users) | 4 |
| Color options | ● |



WOW! It's play time for toddlers. The little ones will be thrilled by the social and physical potential of the Daisy. Up to 4 children can seesaw, play and cooperate at the same time, making this a highly versatile play unit, taking up little space and appealing to toddlers again and again. Apart from providing great play, the Daisy supports fundamental areas of a child's

development and learning through play: Important motor skills such as balance and proprioception get trained when children rock, pushing their feet and pulling their arms. These are fundamental to life skills such as for instance managing traffic securely. While rocking together, toddlers additionally train important social-emotional skills such as

cooperation. The logic of movement sequence trains the child's thinking skills. The Daisy is true playful learning.




Daisy

KPL110



Handhold

Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.

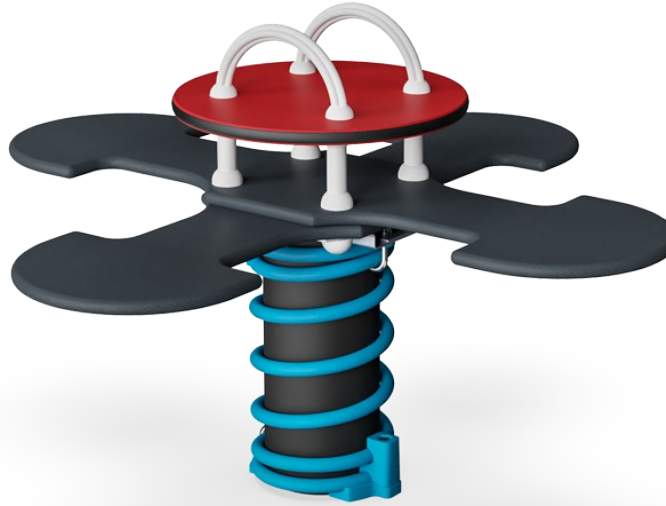

Rocking together

Social-Emotional: the possibility of rocking two together trains cooperation skills. Consideration of others when rocking.



Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. **Cognitive:** trains the understanding of cause and effect: when I move my body, the spring responds with movement.

Daisy

KPL110



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

| | |
|---------------------------------|--------------------------|
| Item no. KPL110-0411 | |
| Installation Information | |
| Max. fall height | 60 cm |
| Safety surfacing area | 9.6 m² |
| Total installation time | 2.0 hours |
| Excavation volume | 0.15 m³ |
| Concrete volume | 0.00 m³ |
| Footing depth (standard) | 45 cm |
| Shipment weight | 38 kg |
| Anchoring options | In-ground ✓ Surface ✓ |
| Warranty Information | |
| EcoCore HDPE | Lifetime |
| Handle | 10 years |
| HPL seat | 15 years |
| Spare parts guaranteed | 10 years |
| Springs | 5 years |



Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.



Handholds are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.




The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime. The springs have a PUR insert for stabilizing the spring.



Sustainability Data

KPL110

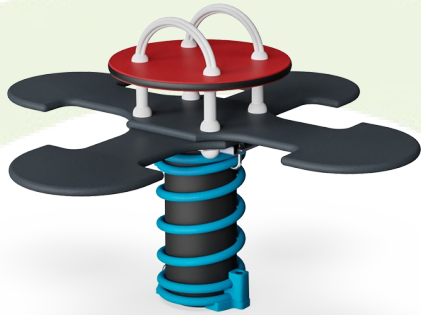

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| KPL110-0411 | 110.98 | 3.05 | 27.66 |


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000




* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

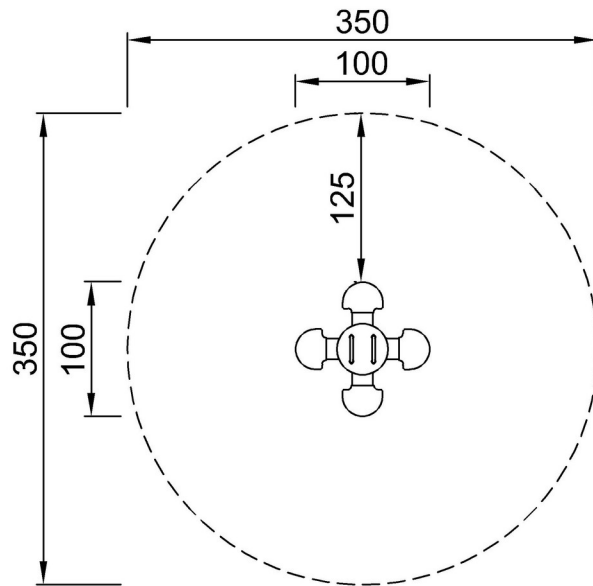

KPL110
*60cm
**65cm
***9.6m²

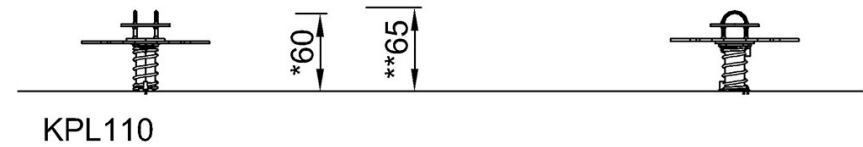

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)