
COR31444



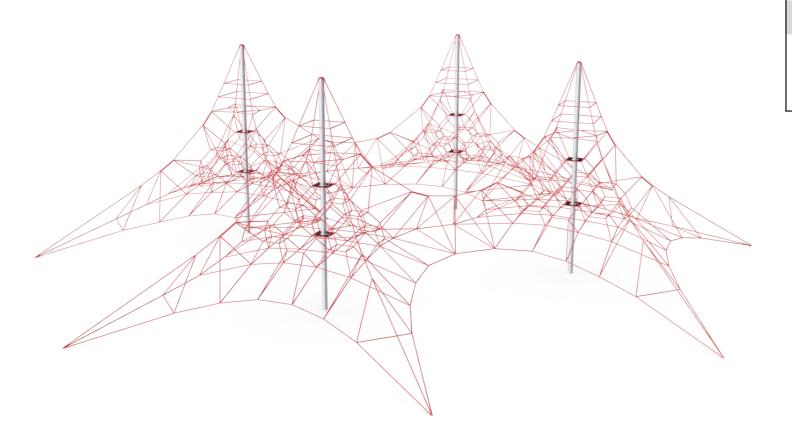

Item no. COR314441-1201

General Product Information

Dimensions LxWxH 65'0"x65'0"x19'4"

Age group 5 - 12

Play capacity (users) 160


Color options



With their impressive height and volume, the Four-Mast Spacenet compels children to climb up high. The feeling of achievement after climbing to the top is phenomenal. The children's climbing moves the net, creating thrill. This makes children come back again and again for more of the bouncy, climbing loops. Climbing the interdependent bouncy meshes of

the transparent net is challenging and trains important motor skills such as balance and coordination. These motor skills are fundamental to sitting still or navigating crowded spaces safely. Major muscle groups are used when children climb the Four-Mast Spacenet: arms push and pull, legs push, and the core provides stability as the children cling

onto the ropes. The Four-Mast Spacenet trains courage and self-regulation, skills necessary for children's social-emotional development.



COR31444








#### Mast

Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.

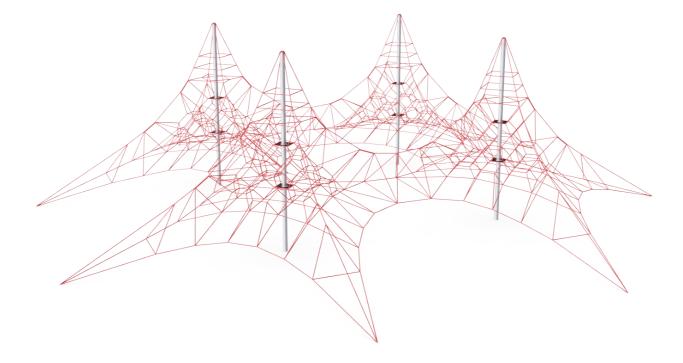









Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. Social-Emotional: great meeting point allowing socializing.



Highest rungs





Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, selfconfidence, consideration and turn-taking, all important life skills.



### Transparency

Social-Emotional: the transparency makes cooperation and communication possible throughout, important life-skills for children to



Bouncy net meshes



Physical: agility, balance and coordination as

well as spatial awareness are supported when

bouncing, climbing and sitting in the net.

and core, and build bone density when

jumping down. Social-Emotional: the

and cooperation. Cognitive: physical memory, logical thinking, concentration.

Children use muscle strength of arms, legs

bouncing, swaying net appeals to empathy





Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. Social-Emotional: allow more children being seated together, sharing.













COR31444



6'1"

46.9

3'7"

3772ft<sup>2</sup>

25.32yd3

16.11yd3

3736lbs




Corocord ropes with 19mm diameter or more are special 'Hercules' - type with galvanized six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The spacenets' main bearing ropes are equipped with an additional safety feature: should the main connections fail, the safety rope prevents collapse of the structure.



Warranty Information	
Corocord Rope	10 Years
Membrane	2 Years
S-Clamps	10 Years
Spare Parts Availability	10 Years
Steel post HDG	Lifetime



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



In the center of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favorable and equalizes the oscillations in the net. The masts are hot dip galvanized as standard, with the design option of additional powder coating.



For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.


Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



# **Sustainability Data**

COR31444



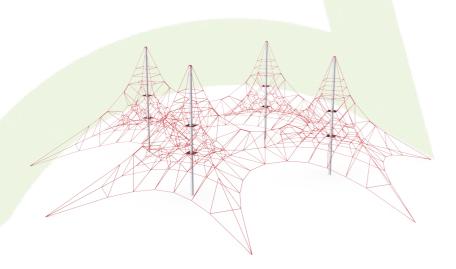

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR314441-1201	4,630.83	3.16	56.10


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mase

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





COR31444

KOMPAN Let's play

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

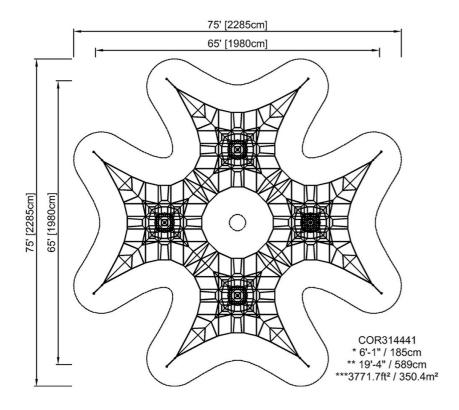



Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

Click to see TOP VIEW

Click to see SIDE VIEW